



j.wyndham
prince

FIRA REPORT

ESR

Westlink Industrial Estate, Kemps Creek - Stage 2, Lot 4 & Lot 5

Flood Impact & Risk Assessment

3 April 2025



Prepared by

J. Wyndham Prince
Contact: Peter Mehl
Phone: 02 4720 3300
Email: jwp@jwprince.com.au
ABN: 67 002 318 621

Prepared for

ESR
Contact: Grace Macdonald
Phone: 0411 599 155
Email: Grace.Macdonald@esr.com

Version control

Issue	Author	Reviewer	Approver	Date Approved
A	Troy McLeod & Peter Mehl	Peter Mehl	Peter Mehl	24/01/2025
B	Troy McLeod & Peter Mehl	Peter Mehl	Peter Mehl	31/01/2025
C	Troy McLeod & Peter Mehl	Peter Mehl	Peter Mehl	3/02/2025
D	Troy McLeod & Peter Mehl	Peter Mehl	Peter Mehl	24/03/2025
E	Troy McLeod	Peter Mehl	Peter Mehl	3/04/2025

© Copyright: The information in this document is the property of J. Wyndham Prince Pty Ltd. Use of this document, or passing it on to others, or copying it, in part or in full, without the written permission of J. Wyndham Prince Pty Ltd, is an infringement of copyright.

TABLE OF CONTENTS

1.	EXECUTIVE SUMMARY	1
2.	INTRODUCTION	3
2.1.	Site Locality.....	3
2.2.	Baseline Site Condition	3
2.3.	Proposed Development	4
2.3.1	Westlink Industrial Estate.....	4
2.4.	Wianamatta South Creek Catchment Flood Study (Advisian, 2022)	5
2.5.	Agency RFI Comments (3 March 2025)	5
3.	DEVELOPMENT CONTROLS	6
3.1.	Mamre Road Precinct Development Control Plan, 2021	6
4.	FLOOD MODELLING	11
4.1.	TUFLOW Model Assumption and Parameters.....	11
4.1.1	Hydrology	11
4.1.2	Base TUFLOW Model Elements.....	12
4.1.3	Base TUFLOW Materials	12
4.1.4	Base TUFLOW Terrain	12
4.2.	Developed Conditions Flood Model Updates.....	13
4.2.1	Developed TUFLOW Model Elements.....	13
4.2.2	Developed TUFLOW Materials	14
4.2.3	Developed TUFLOW Terrain	14
5.	FLOOD IMPACT AND RISK	15
5.1.	Flood Depth and Level.....	15
5.1.1	Freeboard	15
5.2.	Flood Impact	15
5.3.	Flood Velocity	15
5.4.	Flood Hazard	15
5.4.1	Time of Inundation	16
5.5.	Climate Change	17
6.	FLOOD EMERGENCY RESPONSE PLAN	19
6.1.	Secondary Risks	23
6.1.1	Medical Emergencies.....	23
6.1.2	Building fire risks.....	23
6.1.3	Health and Well-Being	23

PLATES

Plate 2-1 – Site Locality	3
Plate 2-2 – Westlink Industrial Estate Architectural Plan (Nettletontribe)	4

Plate 2-3 – PMF Regional Flood Level Map (Advisian, 2022)	5
Plate 4-1 – Upstream Drainage System	13
Plate 5-1 – ARR19 Flood Hazard Zones	16
Plate 5-2 – Time of Inundation Assessment Location	17

TABLES

Table 3-1 – DCP Controls and Responses	7
Table 4-1 – Critical Durations and Temporal Patterns	11
Table 4-2 – Manning's Roughness Coefficient	12
Table 5-1 – Time of Inundation - PMF	16

APPENDICES

Appendix A Figures

Appendix B Indicative Draft Flood Emergency Response Plan

Appendix C RFI Response Matrix

Appendix D Westlink Industrial Estate, Kemps Creek – Stage 2 Water and Stormwater Management Plan
(AT&L January 2025)

1. EXECUTIVE SUMMARY

J. Wyndham Prince (JWP) has been engaged by ESR Australia and New Zealand (ESR) to prepare a Flood Impact and Risk Assessment Report (FIRA) in support of the following adjacent development stages of the Westlink Industrial Estate within the Mamre Road Precinct (MRP) at Kemps Creek:

- Stage 2 (SSD-46983729)
- Lot 4 (SSD-77255706)
- Lot 5 (SSD-77255474)

This comprehensive assessment has been prepared at the request of agencies to ensure that all current and future stages are coordinated and consistent in their approach to flood management.

This report details the procedures used and presents the results of investigations to support three (3) State Significant Development Applications submitted to the Department of Planning, Housing and Infrastructure (DPHI). The proposal involves the construction and use of a series of industrial warehouses and ancillary offices, storage premises, car parking, and signage.

This Flood Impact and Risk Assessment (FIRA) has been prepared to address the requirements of each of the Planning Secretary's Environmental Assessment Requirements (SEARs) for Stage 2, Lot 4 and Lot 5. This FIRA Report has considered potential flood impacts and risks in accordance with the NSW Flood Risk Management Manual (2023) and Section 2.5 of the MRP DCP. Also, it proposes a preliminary emergency management response strategy for local catchment (overland) and mainstream flooding.

Stantec has previously prepared a range of flood investigations to support the Westlink development and separate investigations in support of the proposed Aldington, Abbots, and Mamre Road upgrades. These assessments have been considered in this study.

AT&L has undertaken hydrology modelling for Westlink and in support of other independent infrastructure works within the broader Mamre Road Precinct. Peak flows affecting each of the development stages assessed in this investigation have been obtained from these models and used for this study.

A TUFLOW flood model was developed using this information and formed the base scenario for this Flood Impact Assessment. Importantly, this model focuses on the local overland flooding that occurs across the site due to the site being situated above/outside of the regional Kemps Creek floodplain. The TUFLOW flood model was updated to include a detailed survey of the existing site and was further updated to reflect the proposed development landform and land uses. Flood depth, level, velocity, hazard and difference mapping was prepared for a range of flood events, including the 5% AEP, 1% AEP, 1 in 200 AEP (0.5% AEP), 1 in 500 AEP (0.2% AEP) and PMF events. Flood mapping is provided in Appendix A.

The results of the flood assessment demonstrate that the site is affected by local overland flooding in all events up to and including the PMF. The developed conditions modelling indicates that the proposed site and drainage works will capture and redistribute flows in the road networks and the trunk drainage channel. The mapping demonstrates that the proposed Stage 2, Lot 4 and Lot 5 warehouse pads will be flood-free in events up to and including the PMF flood event. Importantly, the development does not create any adverse external impacts in the 1% AEP storm event.

Given the PMF's affectation of the development site in a local overland flood event, an indicative draft flood emergency response plan (refer to Section 6) has been developed and is provided in Appendix B. This plan provides a template response plan for the Lot 6 warehouse that can be adapted at future stages prior to receiving occupation certification.

Additional TUFLOW modelling was also undertaken in support of the detailed engineering design for the proposed naturalised trunk drainage channel to be constructed on the northern boundary of Stage 2. The details of this further hydraulic assessment are contained in a companion report titled Design Report - Westlink Stage 2, Kemps Creek – Naturalised Trunk Drainage Channel which was also developed concurrently by JWP.

The Flood Impact Assessment concludes that the Westlink Stage 2, Lot 4, and Lot 5 development stages will not adversely impact surrounding properties and will not adversely increase the site's flood hazard categories. While overland flows impact the site, flood hazards for local floods have been assessed and are managed within acceptable levels.

2. INTRODUCTION

2.1. Site Locality

The overall ESR development site, known as the Westlink Industrial Estate, is located at Kemps Creek within the Mamre Road Precinct. It falls within the Penrith City Council local government area and is accessed via Abbotts Road from the West and Aldington Road from the North.

The Westlink Stage 1 and Stage 2 locations are shown below in Plate 2-1.

The site is situated on the eastern side of Mamre Road, which separates it from the Kemps Creek floodplain. It is bordered by zoned IN1 General Industrial lands to the north, The Capitol Hill Rural residential estate to the east, Mamre Road to the west, and zoned IN1 General Industrial lands to the South. Plate 2-1 below provides an overview of the site locality.



Plate 2-1 – Site Locality

2.2. Baseline Site Condition

A baseline site condition has been established for the purpose of the Stage 2, Lot 4 and Lot 5 Flood Impact and Risk Assessment to reflect approved (and under construction) works within the Westlink Industrial Estate and infrastructure works that are currently undergoing independent approval processes. The baseline condition at the Westlink site includes consideration of:

- Westlink Stage 1 (including Stage 1 bulk earthworks)
- Mamre Road – Abbotts Road Intersection Upgrade Works
- Abbotts Road and Aldington Road Intersection Upgrade Works

These conditions form a baseline against which the post development flood impacts can be assessed.

2.3. Proposed Development

2.3.1 Westlink Industrial Estate

The proposed development involves the construction and use of multi-unit industrial warehouses and ancillary offices, storage premises, car parking, and signage. The site will consist of warehouses comprising a ground level and an upper level (level 1). Each warehouse will include offices situated on mezzanine levels. The site will also include basement parking and storage areas, accessed via ramps along the western and southern boundaries of the site.

Nettletontribe has prepared architectural drawings of the proposed development, which should be read in conjunction with this report. Refer to Plate 2-3 for a snapshot of the overarching Westlink Industrial Estate ground floor plan.




Plate 2-2 – Westlink Industrial Estate Architectural Plan (Nettletontribe)

The proposed development seeking approval in this FIRA consists of:

- Westlink Stage 2, which consists of bulk earthworks for Lots 2, 4 and 5, roadworks, stormwater drainage, utility services and the construction of one (1) warehouse building (Lot 6)
- Lot 4 warehouses (4A-4D)
- Lot 5 warehouses (5A-5B)

2.4. Wianamatta South Creek Catchment Flood Study (Advisian, 2022)

The Wianamatta South Creek Catchment Flood Study – Existing Conditions was prepared by Advisian in 2022 to provide a holistic assessment of existing flood behaviour and to define flood constraints that could impact future development within the catchment. The Flood Study includes modelling and assessment of Kemps Creek, which is the downstream creek/floodplain into which the Westlink Industrial Estate discharges. The Flood Study includes mapping the regional PMF event, demonstrating that the Westlink site is situated outside/above the regional PMF levels. This is illustrated in Plate 2-3, which is extracted from the PMF Flood Level Map (Figure 5.20) in the Flood Study.

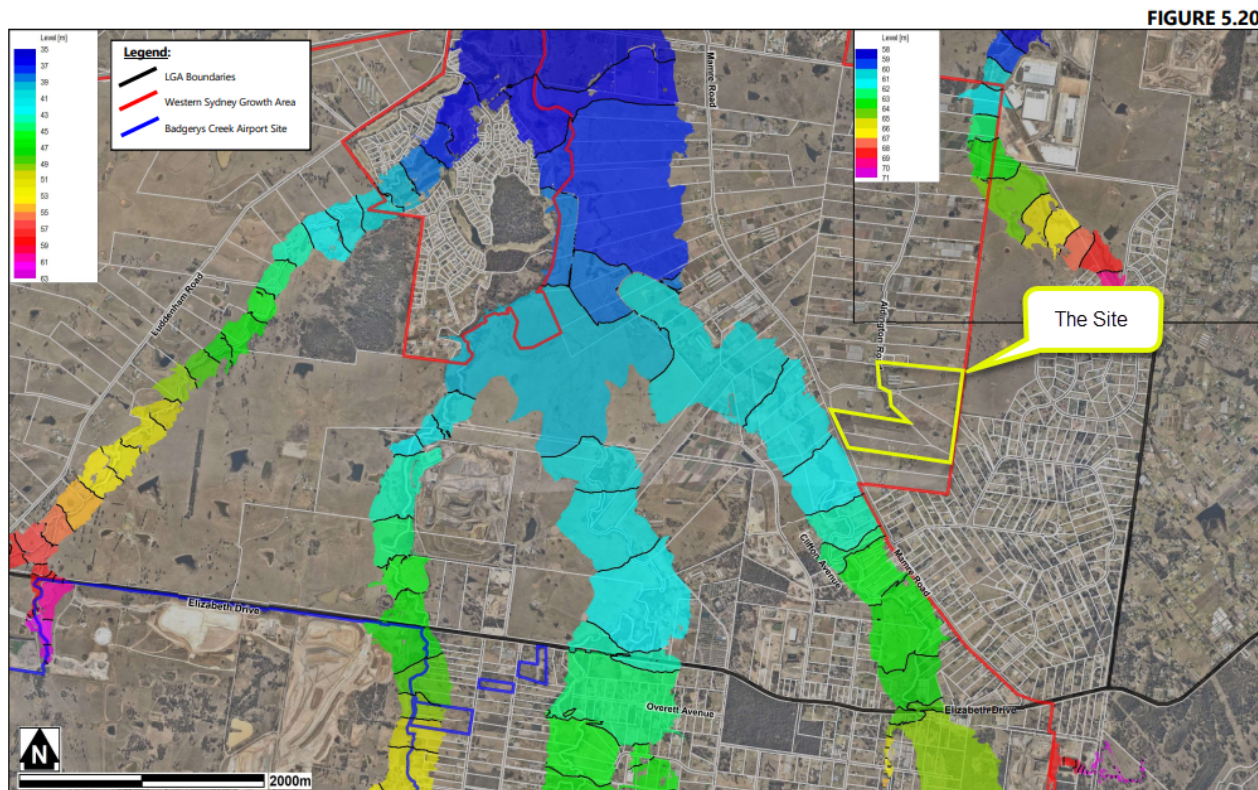

Advisian
 Worley Group
 311015-00053 – Wianamatta South Creek Catchment FS
 fg311015-00053_R2 Figures and Appendices (Rev 8) pptx

**PREDICTED FLOOD LEVELS AT THE
 PEAK OF THE PROBABLE MAXIMUM FLOOD**
 [BASE CASE - EXTENT 4 of 8]

Plate 2-3 – PMF Regional Flood Level Map (Advisian, 2022)

2.5. Agency RFI Comments (3 March 2025)

On 3 March 2025, a series of comments were received from Conservation Programs, Heritage and Regulation Group (CPHR) within the Department of Climate Change, Energy, the Environment and Water (DCCEEW) requesting additional information and considerations to be included in an updated Flood Impact and Risk Assessment (this report). The specific comments have been addressed in a response matrix provided in Appendix C.

3. DEVELOPMENT CONTROLS

3.1. Mamre Road Precinct Development Control Plan, 2021

The Mamre Road Precinct Development Control Plan (the DCP) provides detailed planning controls for industrial development in the Mamre Road Precinct within the Western Sydney Employment Area. The Westlink Stage 2, Lot 4 and Lot 5 developments have considered the flood objectives outlined in Section 2.5 in the DCP which are listed below:

- To ensure development in the floodplain is consistent with the NSW Flood Prone Land Policy and principles in the NSW Government Floodplain Development Manual.
- To ensure floodplain risk management minimises the potential impact of development upon the aesthetic, recreational and ecological values of waterways.
- To maintain the existing flood regime, velocities, flow conveyance and stream hydrology.
- To ensure development does not alter flood behaviour resulting in adverse impacts to surrounding properties, land uses and infrastructure.
- To enable safe occupation and evacuation of flood prone land.
- To ensure development is compatible with flood hazard and flood behaviour.
- To avoid adverse or cumulative impacts on flood behaviour and environment.

A series of controls pertaining to flood prone land are also outlined in the DCP which are addressed and responded to in Table 3-1.

Table 3-1 – DCP Controls and Responses

Control	Compliance	Response
<p>1) A comprehensive Flood Impact Risk Assessment (FIRA) (prepared by a qualified hydrologist and hydraulic engineer) is to be submitted with development applications on land identified as fully or partially flood affected. The FIRA should utilise Council's existing data and data arising from the Wianamatta (South) Creek Catchment Flood Study⁵ to provide an understanding of existing flooding condition and developed conditions consistent with the requirements of the NSW Flood Prone Land Policy and Floodplain Development Manual. The FIRA shall determine:</p> <ul style="list-style-type: none"> Flood behaviour for existing and developed scenarios for the full range of flooding including the 5% Annual Exceedance Probability (AEP), 1% AEP, 0.5% AEP, 0.2% AEP and Probable Maximum Flood (PMF); Flood Function (floodways, flood fringe and flood storage areas); Flood Hazard; and Flood constraints, including evacuation constraints (if applicable). 	Y	<p>This Flood Impact and Risk Assessment (FIRA) has been developed for the southern portion of the Westlink Industrial Estate and encompasses Stage 2 (this application), and the future Lot 4 and Lot 5 stages of the project.</p> <p>The flood impacts for this portion of the Westlink were assessed by reviewing the Wianamatta South Creek Catchment Flood Study (2022) to identify regional impacts and by the development of a TUFLOW 2-dimensional flood model and comprehensive flood mapping to assess local flood impacts. The FIRA confirms that for local flooding:</p> <ul style="list-style-type: none"> The Westlink development site elevation is higher than regional PMF flood levels in Kemps Creek and is therefore not affected by South Creek /Kemps Creek flooding. Local flood behaviour was identified for existing and developed scenarios for the full range of flood events nominated. The large pad industrial development proposed modifies the existing landform across the site and consequently, the mapping of hydraulic categories for existing and post-development scenarios was considered to be of negligible value. The proposed naturalised drainage channel is designed to perform a floodway function. The lot and street drainage system proposed meets all design criteria for performance and safety. As the flood impact assessment demonstrates that there are no unacceptable off-site impacts then all additional flooding within the site must be flood fringe by definition. Flood hazards for events up to and including PMF were mapped and are within expected safety standards. The flood assessment confirms there are no constraints arising from flooding on the site. Flood evacuation is not required for regional flooding and due to the fast flood response times in local events, evacuation is not viable during local flooding. A shelter-in-place strategy is proposed in these circumstances.
<p>2) The FIRA shall adequately demonstrate to the satisfaction of the consent authority that:</p> <ul style="list-style-type: none"> Development will not increase flood hazard, flood levels or risk to other properties; Development has incorporated measures to manage risk to life from flooding; For development located within the PMF, an Emergency Response Plan is in place; Structures, building materials and stormwater controls are structurally adequate to deal with PMF flow rates and velocities (including potential flood debris); Development siting and layout maintains personal safety during the full range of floods and is compatible with the flood constraints and potential risk; The impacts of sea level rise and climate change on flood behaviour has been considered; Development considers Construction of Buildings in Flood Hazard Areas and accompanying handbook developed by the Australian Building Codes Board (2012); and Fencing does not impede the flow of flood waters/overland flow paths. 	Y	<p>This Flood Impact and Risk Assessment (FIRA) has been developed for the southern portion of the Westlink Industrial Estate and encompasses Stage 2 (this application), and the future Lot 4 and Lot 5 stages of the project. The FIRA demonstrates that:</p> <ul style="list-style-type: none"> There are no flood impacts for regional Wianamatta South Creek flood events. The proposed development does not cause adverse local flood impacts of any kind on adjacent properties. The flood hazards associated with the 1% AEP local flooding are generally H1 (generally safe) category in all roads and publicly accessible areas on the site other than in the trunk drainage channel where they are Max H4 (unsafe for people and vehicles) category. In a PMF local flood, hazards reach a H5 (Unsafe for vehicles and people) category in most roadways and as these events feature a fast flood rise and fall response, a Shelter-in-Place based Emergency Response Plan (ERP) is required to effectively manage flood-related risks. An indicative ERP that would apply to the warehouse buildings proposed within the Westlink Industrial Estate is included in Appendix B. All future structures on the site will need to adopt flood-compatible building materials and practices and will be structurally designed to accommodate local PMF flow rates and velocities while considering the impact of potential flood debris. The proposed stormwater system that services the development lots and supporting infrastructure has been designed to accommodate these loads.

Control	Compliance	Response
Flood Constraints		
3) New development in floodways, flood fringe and/or flood storages or in high hazard areas in the 1% AEP flood event considering climate change is not permitted.	NA	The Westlink Industrial Estate is located at an elevation that is higher than regional PMF flood levels identified in the Wianamatta (South) Creek Catchment Flood Study (2022) and consequently, this requirement is not applicable.
4) Development applications are to consider the depth and nature of flood waters, whether the area forms flood storage, the nature and risk posed to the development by flood waters, the velocity of floodwaters and the speed of inundation, and whether the development lies in an area classed as a 'floodway', 'flood fringe area' or 'flood storage area'.	Y	<p>This Flood Impact and Risk Assessment (FIRA) has been developed for the southern portion of the Westlink Industrial Estate and encompasses Stage 2 (this application), and the future Lot 4 and Lot 5 stages of the project.</p> <p>The proposed naturalised drainage channel is designed to perform a floodway function. The lot and street drainage system proposed meets all design criteria for performance and safety. As the flood impact assessment demonstrates that there are no unacceptable off-site impacts for flood events up to the 1% AEP flood then all additional flooded areas on the site are not 'flood storage' and consequently can be categorised as 'flood fringe'.</p> <p>Flood Hazards for the 1% AEP flood were also mapped and generally have a hazard category of H1 (generally safe) in roadways and overland flow paths.</p> <p>For the local PMF event hazards up to a maximum H5 (Unsafe for vehicles and people) category have been identified on the site. This local extreme flooding is characterised by a fast rise and fall flood response. Flood evacuation of the Westlink site in these extreme local flash flooding events is considered to be substantially more dangerous than applying a shelter-in-place approach and consequently, an Emergency Response Plan (ERP) focused on a shelter-in-place strategy is required to effectively manage flood-related risks. An indicative ERP that would apply to the warehouse buildings proposed within the Westlink Industrial Estate is included in Appendix B.</p> <p>Consequently, the development meets this development control.</p>
Subdivision		
5) Subdivision of land below the flood planning level will generally not be supported.	NA	The Westlink Industrial Estate is located at an elevation that is higher than regional PMF flood levels identified in the Wianamatta (South) Creek Catchment Flood Study (2022) and consequently, this requirement is not applicable.
6) Subdivision must comply with Designing safer subdivisions guidance on subdivision design in flood prone areas 2007 (Hawkesbury-Nepean Floodplain Management Steering Committee).	Y	This Flood Impact and Risk Assessment (FIRA) has been developed for the southern portion of the Westlink Industrial Estate and provides detailed flood mapping for a wide range of storms and parameters. This assessment confirms that there are no offsite flood-related impacts associated with the development and that flooding within the site is managed effectively and safely. Consequently, the proposal complies with the Designing Safer Subdivision (2007) guidelines.
New Development		
7) Finished floor levels shall be at 0.5m above the 1% AEP flood.	Y	This Flood Impact and Risk Assessment (FIRA) has been developed for the southern portion of the Westlink Industrial Estate and provides 1% AEP flood depth and flood elevation maps (refer to Appendix A). All finished floor levels proposed on the site are set a minimum of 0.5 m above the mapped 1% AEP flood levels.
8) Flood safe access and emergency egress shall be provided to all new and modified developments consistent with the local flood evacuation plan, in consultation with Council and the State Emergency Services (SES).	Y	<p>The Westlink Industrial Estate is located at an elevation that is higher than regional PMF flood levels identified in the Wianamatta (South) Creek Catchment Flood Study (2022) and consequently, this requirement does not apply to regional flood events.</p> <p>For the local PMF event hazards up to a maximum H5 (Unsafe for vehicles and people) category have been identified on the site. This local extreme flooding is characterised by a fast rise and fall flood response. Flood evacuation of the Westlink site in these extreme local flash flooding events is considered to be substantially more dangerous than applying a shelter-in-place approach and consequently, an Emergency Response Plan (ERP) focused on a shelter-in-place strategy is required to effectively manage flood-related risks. An indicative ERP that would apply to the warehouse buildings proposed within the Westlink Industrial Estate is included in Appendix B.</p>

Control	Compliance	Response
Storage of Potential Pollutants		
9) <i>Potential pollutants stored or detained on-site (such as on-site effluent treatment plants, pollutant stores or on-site water treatment facilities) shall be stored above the 1% AEP flood. Details must be provided as part of any development application.</i>	N/A	The development does not propose any infrastructure that requires the storage of potential pollutants.
Overland Flow Flooding		
10) <i>Development should not obstruct overland flow paths. Development is required to demonstrate that any overland flow is maintained for the 1% AEP overland flow with consideration for failsafe of flows up to the PMF.</i>	Y	The proposed major and minor system drainage has been designed such that development within the estate will not obstruct any overland flow paths. Suitable allowance for overland flow has been made within the design of the major and minor systems. Any future development in the external catchments must be attenuated to this flow regime. The flood impact assessment assesses storms above the 1% AEP and up to the PMF and demonstrates these can be managed appropriately through the development.
11) <i>Where existing natural streams do not exist, naturalised drainage channels are encouraged to ensure overland flows are safely conveyed via vegetated trunk drainage channels with 1% AEP capacity plus 0.5m freeboard. Any increase in peak flow must be offset using onsite stormwater detention (OSD) basins.</i>	Y	The Site incorporates a naturalised trunk drainage channel between the extension of Aldington Road and Mamre Road that will ultimately direct water to future basins to the west of Mamre Road along the Kemps Creek corridor. Details of the proposed naturalised trunk drainage infrastructure are included in the Naturalised Drainage Channel Works drawings (SSD-46983729, drawing set 110965-04-DD001-DD080 by JWP). The stormwater quantity and peak flows of the proposed development are addressed in the WSMP (Water and Stormwater Management Plan Stage 2, by AT&L).
12) <i>OSD is to be accommodated on-lot, within the development site, or at the subdivision or estate level, unless otherwise provided at the catchment level to the satisfaction of the relevant consent authority.</i>	Y	OSD is incorporated into the proposed development. Refer to the on-lot Civil Drawings (Westlink Lot 6 20-748-C6000 Civil Drawings, by AT&L) and the WSMP (Water and Stormwater Management Plan Stage 2, by AT&L).
13) <i>Stormwater basins are to be located above the 1% AEP.</i>	NA	The subject property is higher than the Kemps Creek / South Creek PMF levels. Consequently, the basins are located outside of the mainstream flood extents.
14) <i>Post-development flow rates from development sites are to be the same or less than predevelopment flow rates for the 50% to 1% AEP events.</i>	Y	The DRAINS modelling undertaken in support of the Civil Infrastructure Designs confirms that the on lot OSD system attains these performance objectives. Refer to the WSMP for further details (Water and Stormwater Management Plan Stage 2, by AT&L).
15) <i>OSD must be sized to ensure no increase in 50% and 1% AEP peak storm flows at the Precinct boundary or at Mamre Road culverts. OSD design shall compensate for any local roads and/or areas within the development site that does not drain to OSD.</i>	Y	The proposed OSD has been sized to ensure no increase in peak flows at the discharge point from the estate. Refer to the WSMP (Water and Stormwater Management Plan Stage 2, by AT&L).
Filling of Land At or Below the Flood Planning Level		
16) <i>Earthworks up to the PMF must meet the requirements of Clauses 33H and 33J of the WSEA SEPP as well as Sections 2.5 and 4.4 of this DCP.</i>	NA	The site is higher than the Kemps Creek / South Creek PMF levels and accordingly no filling is proposed within the mainstream PMF. The criteria are not applicable.

Control	Compliance	Response
<p>17) Filling of floodways and/or critical flood storage areas in the 1% AEP flood will not be permitted. Filling of other land at or below the 1% AEP is also discouraged, but will be considered in exceptional circumstances where:</p> <p>The below criteria have been addressed in detail in the supporting FIRA;</p> <ul style="list-style-type: none"> • The purpose for which the filling is to be undertaken is adequately justified; • Flood levels are not increased by more than 10mm on surrounding properties; • Downstream velocities are not increased by more than 10%; • Flows are not redistributed by more than 15%; • The cumulative effects of filling proposals is fully assessed over the floodplain; • There are alternative opportunities for flood storage; • The development potential of surrounding properties is not adversely affected; • The flood liability of buildings on surrounding properties is not increased; • No local drainage flow/runoff problems are created; and • The filling does not occur within the drip line of existing trees. 	NA	<p>The site is higher than the Kemps Creek / South Creek PMF levels and accordingly no development is proposed in mainstream floodways or critical flood storage areas in the 1% AEP as mapped in the 2022 Wianamatta (South) Creek Catchment Flood Study. The criteria are not applicable.</p>

4. FLOOD MODELLING

A hydraulic flood model has been prepared using the TUFLOW software package. TUFLOW can dynamically link 1D and 2D flow regimes with mainstream and local overland flows all in one model, making it an ideal software package for assessing flood behaviour for the proposed works. TUFLOW model build 2023-03-AF was utilised with Heavily Parallelised Compute (HPC) solver functionality to enable faster model run times and utilise the latest software capability.

The flood modelling completed in this assessment considers the 5% AEP, 1% AEP, 1 in 200 AEP, 1 in 500 AEP and Probable Maximum Flood (PMF) local storm events. A flood model has been prepared to represent a baseline condition that reflects the approved Westlink Stage 1 (Interim) works and the future Mamre, Abbots, and Aldington Road upgrade works. This model forms the basis against which post-development flooding is being compared. The proposed developed conditions model builds upon the baseline model and incorporates design components associated with Westlink Stage 2, Lot 4 warehouses and Lot 5 warehouses. The modelling parameters and assumptions are outlined in the following sections.

4.1. TUFLOW Model Assumption and Parameters

The following assumptions and parameters have been adopted in the preparation of the TUFLOW flood model:

4.1.1 Hydrology

Hydrological modelling of Westlink Stage 1, Stage 2 and the Mamre/Abbots/Aldington Road upgrades have been prepared by AT&L. Details of the modelling parameters and assumptions are contained in the AT&L Stormwater Management Appendix C, particularly Section 4.3 of the AT&L Water and Stormwater Management Plan (2025). A breakdown of the base conditions and developed conditions catchments are provided in Figures 3-1 and 3-2 in Appendix A.

Hydrographs were extracted from the DRAINS model at key locations and utilised in the TUFLOW model as inflow hydrology (described further in Section 4.1.2). The critical durations and temporal patterns, as outlined in Table 4-1, have been assessed for each storm event in both the existing and developed scenarios. The flood results have been enveloped to produce the peak flood results across the assessed durations and temporal patterns for each storm.

Table 4-1 – Critical Durations and Temporal Patterns

Storm Event	Critical Durations and Temporal Patterns
5% AEP	30 min TP08 60 min TP06
1% AEP	25 min TP01 45 min TP06
1 in 200 AEP	25 min TP09 45 min TP06
1 in 500 AEP	25 min TP06 45 min TP08
PMF	30-360 min

4.1.2 Base TUFLOW Model Elements

- TUFLOW model extent and grid size – The TUFLOW model boundary encompasses the full Westlink Industrial Estate, extending from the catchment ridgeline to the east and beyond Mamre Road to the west towards Kemps Creek. The grid size adopted in the model is 1m x 1m.
- Model orientation – A 2D location (Loc) line has been adopted to set the orientation of the model grid, which is aligned with the general flow direction across the Westlink site.
- Inflow hydrology – Source area (SA) catchments have been adopted to represent the internal local catchment flows within the model extent. The hydrology has been derived from the AT&L DRAINS models developed for the Westlink Stage 1 (interim) works and the Mamre/Abbotts/Aldington Road upgrade works.
- Downstream boundary conditions – A slope (HQ) boundary has been adopted at the downstream extent of the model to represent the outflow into Kemps Creek. A longitudinal hydraulic slope of 1% has been adopted in this element.
- Pit / Pipe Networks—The model includes 1D network elements to represent the pit and pipe systems proposed/approved within the Westlink Stage 1 (Interim) design and the Mamre/Abbotts/Aldington Road upgrades (including Mamre Road cross drainage).
- Initial Water Levels—Initial water levels (IWL) have been applied to the existing farm dams within the catchment to represent full supply (up to the spillway) at the beginning of the storm events. IWLs have also been adopted in the Westlink Stage 1 basin to represent the permanent pond water level.

Figure 4-1 illustrates the various elements adopted in the base TUFLOW model setup.

4.1.3 Base TUFLOW Materials

Roughness, n , values have been generally adopted per AR&R 2019 guidance and with consideration of current aerial imagery across the site. The Manning's roughness values adopted in the model are detailed in Table 4-2.

Table 4-2 – Manning's Roughness Coefficient

Surface Type	Manning's Roughness, n
Road Reserve	0.020
Farm Sheds	0.100
Light Vegetation	0.050
Medium Vegetation / Channel	0.080
Waterbody	0.020
Concrete Surface	0.013
Building	2.000

Refer to Figure 4-2 for an illustration of the materials adopted within the base conditions TUFLOW model.

4.1.4 Base TUFLOW Terrain

LiDar information obtained from the ELVIS website has been used to inform the existing topography in the TUFLOW model. This has then been supplemented by detailed survey information that was undertaken for the subject site.

4.2. Developed Conditions Flood Model Updates

The developed conditions model for the site includes the following updates to the base conditions flood model:

4.2.1 Developed TUFLOW Model Elements

- Inflow hydrology – Source area (SA) catchments have been adopted to represent the internal local catchment flows within the model extent. The hydrology has been updated based on the ultimate conditions DRAINS models developed by AT&L for Westlink Stage 1 and Westlink Stage 2, including consideration of future Lot 4 and Lot 5.
- Pit / Pipe Networks – 1D network elements have been included in the model to represent the pit and pipe systems that are proposed as part of the ultimate Westlink Stage 1 and Stage 2 works including Lot 4 and Lot 5.

This includes future drainage pits/pipes to convey flows from the upstream (eastern) catchments through Lot 4. This upstream system has been designed as a surcharge arrangement to convey flow up to and including the PMF from the upstream catchments before surcharging within the Westlink site. The proposed system is illustrated in Plate 4-1 below.

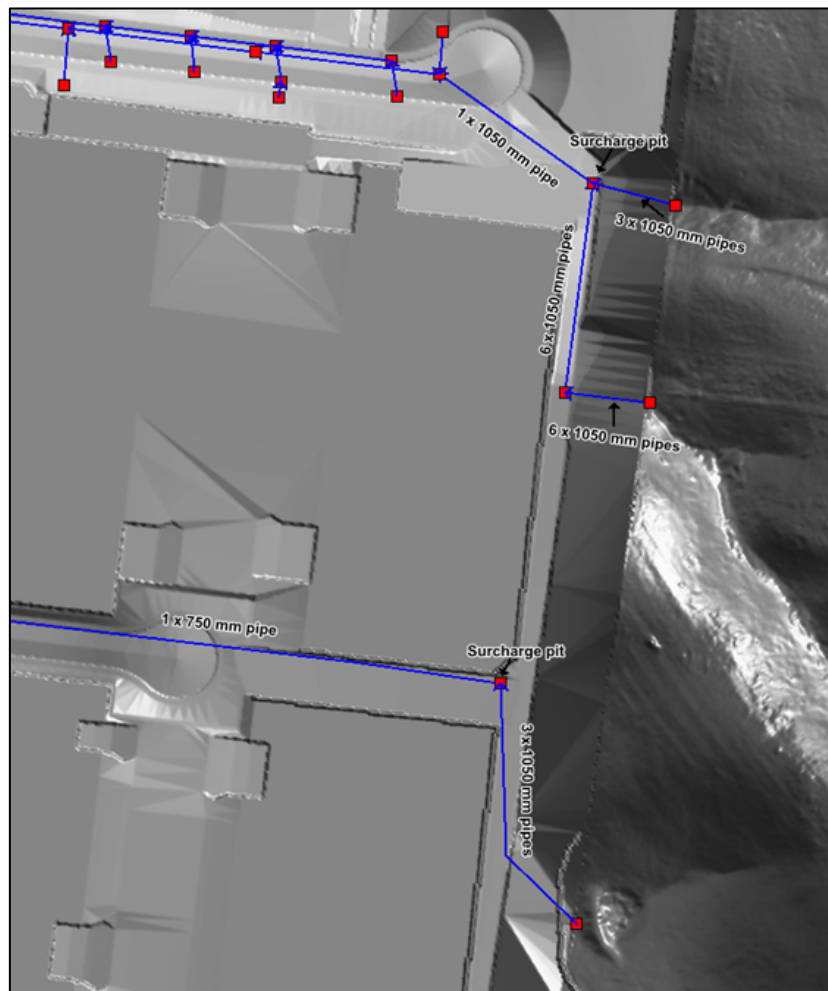


Plate 4-1 – Upstream Drainage System

Refer to Figure 4-3 for an illustration of the various elements adopted in the developed TUFLOW model setup.

4.2.2 Developed TUFLOW Materials

Roughness, n , values for the developed conditions have been generally adopted in accordance with AR&R 2019 guidance and Sydney Waters Stormwater Scheme Infrastructure Design Guidelines (2024). Refer to Figure 4-4 for an illustration of the materials adopted within the developed conditions TUFLOW model.

4.2.3 Developed TUFLOW Terrain

The base conditions TUFLOW terrain has been supplemented with the design surface information for Westlink Stage 2, Lot 4 and Lot 5 prepared by AT&L and the Westlink Stage 2 trunk drainage channel surface prepared by JWP.

Several terrain modifications (z-shapes) have also been incorporated into the developed model to reflect the proposed flood mitigation measures across the site. This includes modelling the temporary drainage swale proposed to drain the Aldington Road sag to the head of the Stage 2 drainage channel and modelling the proposed retaining wall at the turning head of Aldington Road (along the southern boundary). Further details of these measures can be found in the AT&L Westlink Stage 2 Infrastructure Drawings.

5. FLOOD IMPACT AND RISK

A series of flood maps have been prepared to illustrate the flooding outcomes of the TUFLOW modelling. The flood maps have been prepared with consideration of the requirements outlined in the Flood risk management guideline LU01 – Flood impact and risk assessment and the NSW Flood Risk Management Manual (2023) and section 2.5 of the MRP DCP. Each map represents the enveloped peak flood result of the modelled events, durations and temporal patterns.

5.1. Flood Depth and Level

Flood extent, depth and level mapping have been prepared for the base and developed case scenarios. The flood depth and level mapping are shown in Figures 5-1 to 5-10 in Appendix A and indicate that the base conditions site is affected by local overland flooding in all events up to and including the PMF. As previously demonstrated in our review of the Existing Conditions Wianamatta-South Creek Flood Modelling (Advisian, 2022), the site is situated outside of the regional Kemps Creek PMF extent. It is, therefore, not subject to regional flooding.

The base conditions flood mapping shows minor overland flows propagating across the Lot 2 bulk earthworks pad. This minor sheet flow emanates from the upstream existing catchment, which is resolved in the developed conditions modelling.

The developed conditions flood depth and level mapping indicate that the proposed site and drainage works will capture and redistribute flows in the road networks and the trunk drainage channel. The mapping demonstrates that the proposed Stage 2, Lot 4 and Lot 5 warehouse pads will be flood free in events up to and including the PMF flood event.

5.1.1 Freeboard

The 1% AEP flood levels surrounding each warehouse (generally occurring in the adjacent road reserves) are sufficiently managed to provide freeboard (0.5 m) to the proposed warehouse finished floor levels (FFL).

5.2. Flood Impact

Flood level difference mapping has been prepared for the 1% AEP storm event to demonstrate the flood impacts and benefits of the proposed development external to the site. The flood level difference mapping is shown in Figure 5-11 in Appendix A and indicates that no adverse impacts will be created by the proposed development external to the site.

5.3. Flood Velocity

Flood velocity mapping has been prepared for the 1% AEP storm event in both the base and developed conditions. The flood velocity mapping is shown in Figures 5-12 to 5-13 in Appendix A. A flood velocity difference map has also been produced to demonstrate the relative changes in velocity which is presented in Figure 5-14 in Appendix A. The mapping indicates that velocities external to the development site are generally maintained to be equal to or less than base conditions velocities.

5.4. Flood Hazard

Flood hazard mapping has been prepared for the base and developed conditions. Hazard grids are developed directly out of the TUFLOW model and have been used to produce the hazard maps presented in Figures 5-15 to 5-24 in Appendix A. The mapped hazard zones are consistent with the Australian Rainfall and Runoff 2019 (ARR19) which are shown in Plate 5-1 below. Hazard mapping provides a context of the safe access and egress available to occupants at the proposed site.

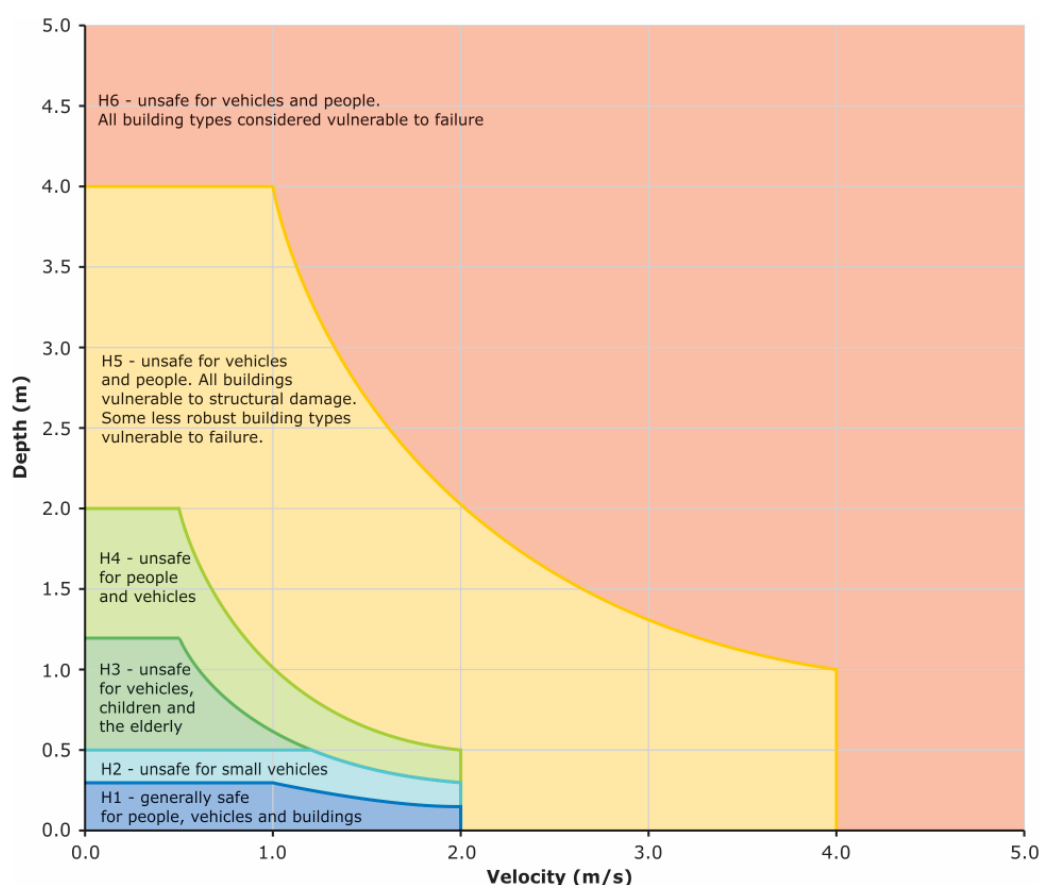


Plate 5-1 – ARR19 Flood Hazard Zones

The hazard mapping shows that the base conditions site is generally subject to widespread hazards of H1 in all events up to and including the 0.2% AEP with some localised flow paths and ponding areas with hazards up to H4. In the PMF, the base conditions site generally experiences hazards of H1 across most of the site, with hazards up to H5 localised to the flow paths and ponded areas.

The hazard category across the site is generally maintained or improved in developed conditions for all modelled events, given that large portions of the site become flood-free due to the proposed warehouse lots. In the PMF event, the site still experiences hazards in the H5 category of flooding; however, these are localised to road reserves and overland flow routes. Flood hazards for all modelled events, including PMF, are within expected safety standards.

5.4.1 Time of Inundation

A detailed assessment has been undertaken to assess the time of inundation of key access/egress routes during an extreme PMF event. The key location that influences the ability of occupants to evacuate the Westlink development is Abbots Road near the intersection of Aldington Road. Refer to Plate 5-2 for context.

Table 5-3 below provides an indication of the time (measured from the beginning of the storm) at which Abbots Road becomes unsafe (hazard \geq H2) and the maximum duration that the road remains unsafe.

Table 5-1 – Time of Inundation - PMF

Route Name	Time to first H2 cutoff	Time to last H2 cutoff	Max duration of cutoff
Abbots Road	5 mins	4 hrs 45 mins	4 hrs 40 mins

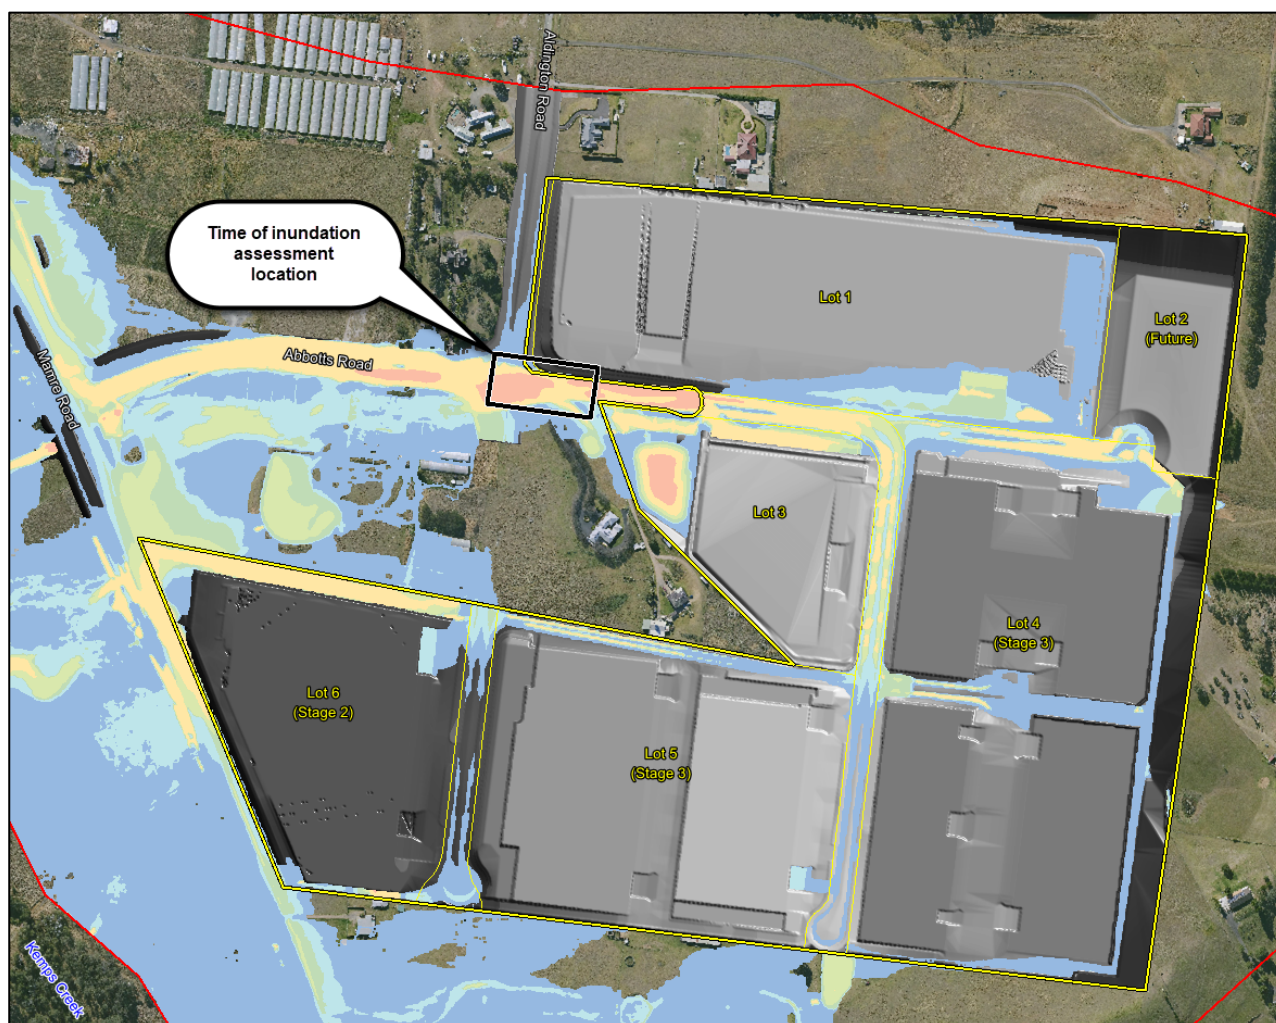


Plate 5-2 – Time of Inundation Assessment Location

The PMF time of inundation results demonstrate that the local overland flooding constitutes “flash flooding” as defined in the DPHI Shelter in Place guideline for flash flooding (2025). Therefore, site evacuation is not achievable, and shelter-in-place is the most suitable emergency response measure. Section 6 addresses the key considerations outlined in the Shelter-in-place guidelines to further demonstrate how this measure will be implemented and maintained at the Westlink site.

5.5. Climate Change

The climate change guideline provided in the Australian Rainfall and Runoff (AR&R) 2019 Chapter 6 of Book 1 has been used to understand the potential climate hazards surrounding the Subject site.

AR&R 2019 suggests a six-step process for incorporating climate change risks into decision-making, which involves estimating design flood characteristics.

The application of Step 4 in the six-step process indicates that for the 1% AEP event, the practitioner could consider the impact of the 0.2% AEP event to gain an understanding of the extent to which the risks of climate change may exceed the facility's coping capacity to perform its intended function. The flood level/ depth results for the 0.2% AEP in the base and developed condition are provided in Figures 5-4 and 5-9 in Appendix A.

Modelled peak flood levels for the 0.2% AEP event across the proposed development indicate that the increase in rainfall intensities associated with climate change does not compromise the flood management approach's intent and outcomes.

Hence, it is concluded that the increases in flood levels are minimal, and the exposure risk to the impacts of climate change is considered “low.” Therefore, we believe additional climate change considerations are unnecessary to support this DA.

6. FLOOD EMERGENCY RESPONSE PLAN

The detailed flood impact assessment demonstrates that the development site is affected by local overland (catchment) flooding in storm events up to and including the Probable Maximum Flood (PMF) event. Importantly, the site is not subject to regional Kemps Creek flooding in all events up to, and including, the PMF. In events up to and including the 0.2% AEP, flows are generally conveyed in the road networks and are maintained to a flood hazard category of H1 (generally safe) before discharging to the downstream trunk drainage channel where hazards reach a maximum of H4 (unsafe for people and vehicles). In a PMF local flood, hazards reach a H5 (Unsafe for vehicles and people) category in most roadways and as these events feature a fast flood rise and fall response, a Shelter-in-Place based Flood Emergency Response Plan (FERP) is required to manage flood-related risks effectively.

The flood behaviour across the development has been assessed against the guidance provided in the Designing Safer Subdivisions – Guidance on Subdivision Design in Flood Prone Areas (Hawkesbury-Nepean Floodplain Management Strategy Steering Committee) to support the suitability of the Shelter-in-Place approach. The following key information is noted:

- PMF flooding will not enter the warehouses in which people are likely to be sheltering
- Local PMF flooding occurs for a limited duration. Unsafe flooding occurs on Abbots Road within 5 minutes of the beginning of the storm surge, and flooding remains unsafe (hazard > H2) for a maximum of 4 hours and 45 minutes of the beginning of the storm surge.
- The hydraulic hazard mapping demonstrates that in the PMF event, flood hazards of H2 and greater are localised to road reserves and overland flow paths.
- The proposed warehouses will have habitable spaces for people on site to shelter above the PMF flood levels.
- It is expected that utility services will be able to be reinstated shortly after the recession of the flood.

The flood behaviour has also been assessed against the Shelter in place guideline for flash flooding (DPHI, 2025). Each of the shelter-in-place considerations in the guideline has been responded to in Table 6-1 below.

Shelter-in-place consideration (DPHI, 2025)	Response
1. does shelter-in-place align with existing emergency management strategies for the area, as determined through the flood risk management process and by the NSW SES	The South Creek Floodplain Risk Management Study (Advisian, 2020) identifies the emergency response planning communities for the Kemps Creek regional flood. The Westlink Industrial Estate is situated outside of the regional Kemps Creek PMF extent and, therefore, is not identified in the regional emergency response plan.
2. has evacuation off-site (the primary emergency management strategy) been investigated and determined to be unachievable	A detailed assessment of the time and duration of local overland PMF inundation has been undertaken within the Westlink site (see section 5.4 of this report). Modelling indicates that roads become unsafe (>H2) within 5 minutes from the beginning of a local PMF storm and remain unsafe for up to 5 hours.
3. does the development include medical centres, emergency service and community facilities, and sensitive and hazardous land uses, some of which may not be suitable for shelter-in-place	The development does not include medical centres, emergency services, community facilities, or sensitive and hazardous land uses.

Shelter-in-place consideration (DPHI, 2025)	Response
<p>4. shelter-in-place for greenfield development is not supported</p>	<p>The Westlink site is not inundated by regional flooding (to which we understand this comment applies) and is only impacted during local overland flood events. Detailed assessment of modelling results indicates that shelter-in-place is the most achievable emergency response for this site. Also, this development is an industrial development (not residential), which is generally a more controlled environment where shelter-in-place processes can be effectively enforced.</p>
<p>5. whether there is existing government developed flood warning systems that give advanced detailed forecasts of flash flooding to allow sufficient time to evacuate to the proposed refuge locations</p>	<p>There are no specific flood warning systems for the local overland flooding that the Westlink site is subject to. The Bureau of Meteorology forecasts can be monitored to alert of impending severe rainfall events. However, insufficient time is available from the onset of any extreme rainfall event (such as a PMF) to facilitate evacuation from the site.</p>
<p>6. can the community effectively be informed of the risks associated with the emergency management strategy</p>	<p>Yes, the occupants of the industrial warehouses can be informed about the flood emergency response plan by the site's supervising manager. This can form part of the site inductions prior to an individual's employment and can be reinforced during toolbox talks at the beginning of each shift on days with any chance of heavy rainfall.</p>
<p>7. detailed assessment of evacuation off-site (the primary emergency management strategy) to determine that evacuation off-site is not achievable.</p>	<p>A detailed assessment of the time and duration of local overland PMF inundation has been undertaken within the Westlink site (see section 5.4 of this report). Modelling indicates that roads become unsafe within 5 minutes from the beginning of a local PMF storm and remain unsafe for up to 5 hours, which is characterised as "flash flooding".</p> <p>We have observed several low points, or sag points, along Aldington Road to the north of the Westlink site and along Mamre Road to the south of it. These areas are likely to be affected by local flows during a probable maximum flood (PMF), making evacuation beyond the Westlink precinct difficult.</p>

Shelter-in-place consideration (DPHI, 2025)	Response
<p>8. the flood behaviour at the site, with consideration of climate change and assessment of the potential maximum duration of isolation up to and including the PMF to identify that:</p> <ul style="list-style-type: none"> a) flash flooding is the only flood risk present at the site, whether it be from overland flooding, local creek or riverine flooding, and b) the flooding occurs within less than 6 hours from the commencement of causative rain and the duration of shelter-in-place due to isolation by floodwaters is less than 12 hours from the commencement of rainfall, and c) the development is not subject to high hazard flooding (e.g. floodways, high hazard H5 or H6 areas) or surrounding roadways are not subject to high hazard flooding. 	<p>The Westlink Industrial Precinct is located outside the regional Kemps Creek floodplain, including the PMF event. The flooding experienced on the site (and the subject of this Flood Impact and Risk Assessment) is local overland flooding emanating from the local catchments of the site.</p> <p>The detailed assessment of the time of inundation and maximum isolation times shows that roads become unsafe (> H2) within 5 minutes of the beginning of a local PMF storm and remain unsafe for a maximum of 5 hours from the commencement of rainfall.</p> <p>High hazard flows are experienced in the PMF event along Abbots Road, highlighting the need for a shelter-in-place strategy for extreme storm events.</p>
<p>9. how shelter-in-place will be:</p> <ul style="list-style-type: none"> a) used as part of the site's emergency management response, including actions before, during and after sheltering-in-place, and b) communicated to occupants and visitors of the building and how this communication will be maintained for the life of the development. 	<p>The Flood Emergency Response Plan in Appendix B details the suggested actions before, during and after an event that has triggered a shelter-in-place action.</p> <p>The supervising manager of each warehouse will be responsible for informing individuals on site (occupants and visitors) of the flood emergency response plan and when shelter-in-place action is required.</p>
<p>10. an understanding of the secondary risks and how the proponent proposes they will be managed is outlined in the FIRA. Secondary risks include medical emergencies, building fires, health and well-being.</p>	<p>The Flood Emergency Response Plan (FERP) has been updated to address medical emergencies, building fire risks, and occupant health and well-being.</p>
<p>I. the floor level of the shelter-in-place part of the development be above the PMF, and</p>	<p>All building floor levels within Westlink Lots 4, 5 & 6 are located above the adjacent PMF levels.</p>
<p>II. structural soundness for conditions in a PMF event, considering flood and debris forces, be verified by a suitably qualified structural engineer, and</p>	<p>All building floor levels within Westlink Lots 4, 5 & 6 are located above the adjacent PMF levels.</p>

Shelter-in-place consideration (DPHI, 2025)	Response
III. area and access to the area does not rely on access to electricity, is self-directing, and have clearly marked internal access for all people on site, including consideration of access for potential occupants and/or visitors.	All areas within each warehouse will be accessible without reliance on external power. Internal staircases and designated access points will be clearly marked.
IV. protection from weather and appropriate heating and cooling	All buildings will be weather resistant and include appropriate heating/cooling systems supported by back-up power generation to ensure it remains operational during an extreme storm event.
V. access to personal hygiene facilities such as a toilet	All building floor levels within Westlink Lots 4, 5 & 6 are located above the adjacent PMF levels. This includes all personal hygiene facilities situated in each warehouse.
VI. a minimum floor space of 2 m ² per person	The estimated floor space of the Westlink development facilitates at least 2 m ² per person.
VII. items for self-sufficiency that are stored, maintained and are regularly updated in an accessible location above the PMF, including sufficient drinking water and food for occupants, fire extinguishers, radios and torches with spare batteries, and a first aid kit with an automated external defibrillator (AED)	All buildings will be maintained with sufficient drinking water and food for at least 12 hours, fire extinguishers, radios, torches (with spare batteries), first aid kits, and an automated external defibrillator (AED).
VIII. centralised communal shelters may be considered but must be freely accessible internally at all times and externally accessible during events	Each warehouse building will operate as a centralised communal shelter for its occupants. Critical facilities within each warehouse will always be freely accessible to occupants.
IX. access is provided to onsite systems that generate power of the shelter-in-place location during and after the event for a full range of flood events up to the PMF	Each warehouse will have backup power generation to ensure lighting, communication, and essential systems remain operational.
X. detail how these requirements will be maintained and enforced for the life of the development.	The managing supervisor of each warehouse will be responsible for ensuring that the FERPs requirements are maintained. The FERPs will be regularly updated and tested to ensure that all emergency protocols remain effective.

6.1. Secondary Risks

6.1.1 Medical Emergencies

First Aid & Emergency Response Kits:

- The shelter-in-place location will be stocked with fully equipped first aid kits, including bandages, disinfectants, pain relievers, and other essential medical supplies.
- An Automated External Defibrillator (AED) will be available for cardiac emergencies.

Medical Assistance Protocols:

- A designated emergency coordinator will be responsible for monitoring occupants and ensuring medical assistance is sought if required.
- In a medical emergency, contact emergency services (ambulance, paramedics) immediately once floodwaters begin to recede.

Communication with Emergency Services:

- Access to various cell phone networks and suitable IP telephony will be available to maintain contact with NSW SES and medical responders in case of an emergency.
- Where possible, an on-site medical officer or trained first aider will be designated during flood events.

6.1.2 Building fire risks

Fire Protection Systems:

- Fire extinguishers and fire blankets will be located within the shelter-in-place area.
- The shelter will be equipped with smoke detectors and an automatic fire suppression system where feasible.

Evacuation & Fire Safety Measures:

- Emergency fire escape routes will be clearly marked and communicated to all occupants.
- If a fire occurs during a flood event, occupants will follow pre-determined fire evacuation procedures while considering flood conditions.

6.1.3 Health and Well-Being

Sufficient Essential Supplies:

- The shelter will be stocked with:
 - Adequate drinking water to support occupants for at least 12 hours.
 - Non-perishable food supplies to sustain occupants.
 - Hygiene essentials, including hand sanitisers, disposable towels, and personal hygiene products.

Ventilation & Air Quality:

- Adequate ventilation systems will be maintained to prevent issues related to poor air quality and humidity.
- Backup power will support minimal climate control and lighting.

Occupant Comfort & Psychological Support:

- Comfortable seating and rest areas will be designated to reduce physical stress.

- Where feasible, basic entertainment and mental well-being resources (such as radios, books, or communication devices) will be provided.
- Periodic training sessions and emergency drills will help occupants remain prepared and reduce panic during actual events.


An indicative FERP that would apply to the warehouse buildings proposed within the Westlink Industrial Estate is included in Appendix B.


In summary, this Flood Impact and Risk Assessment (FIRA) for Westlink Stage 2 confirms that shelter-in-place is a viable strategy due to rapid flood onset, short isolation duration, and structural elevation above PMF. The Flood Emergency Response Plan (FERP) aligns with NSW shelter-in-place guidelines, addressing community awareness, emergency supplies, structural integrity, and secondary risks. Design criteria have been met, ensuring safety, accessibility, power resilience, and hygiene facilities for sheltering occupants.

APPENDIX A

FIGURES

Filename: "J:\110965 - Westlink\SWF\Mapinfo\Figures\ST2 FIRA\110965-04_Fig3-1_Base_Catchments_A.wor"

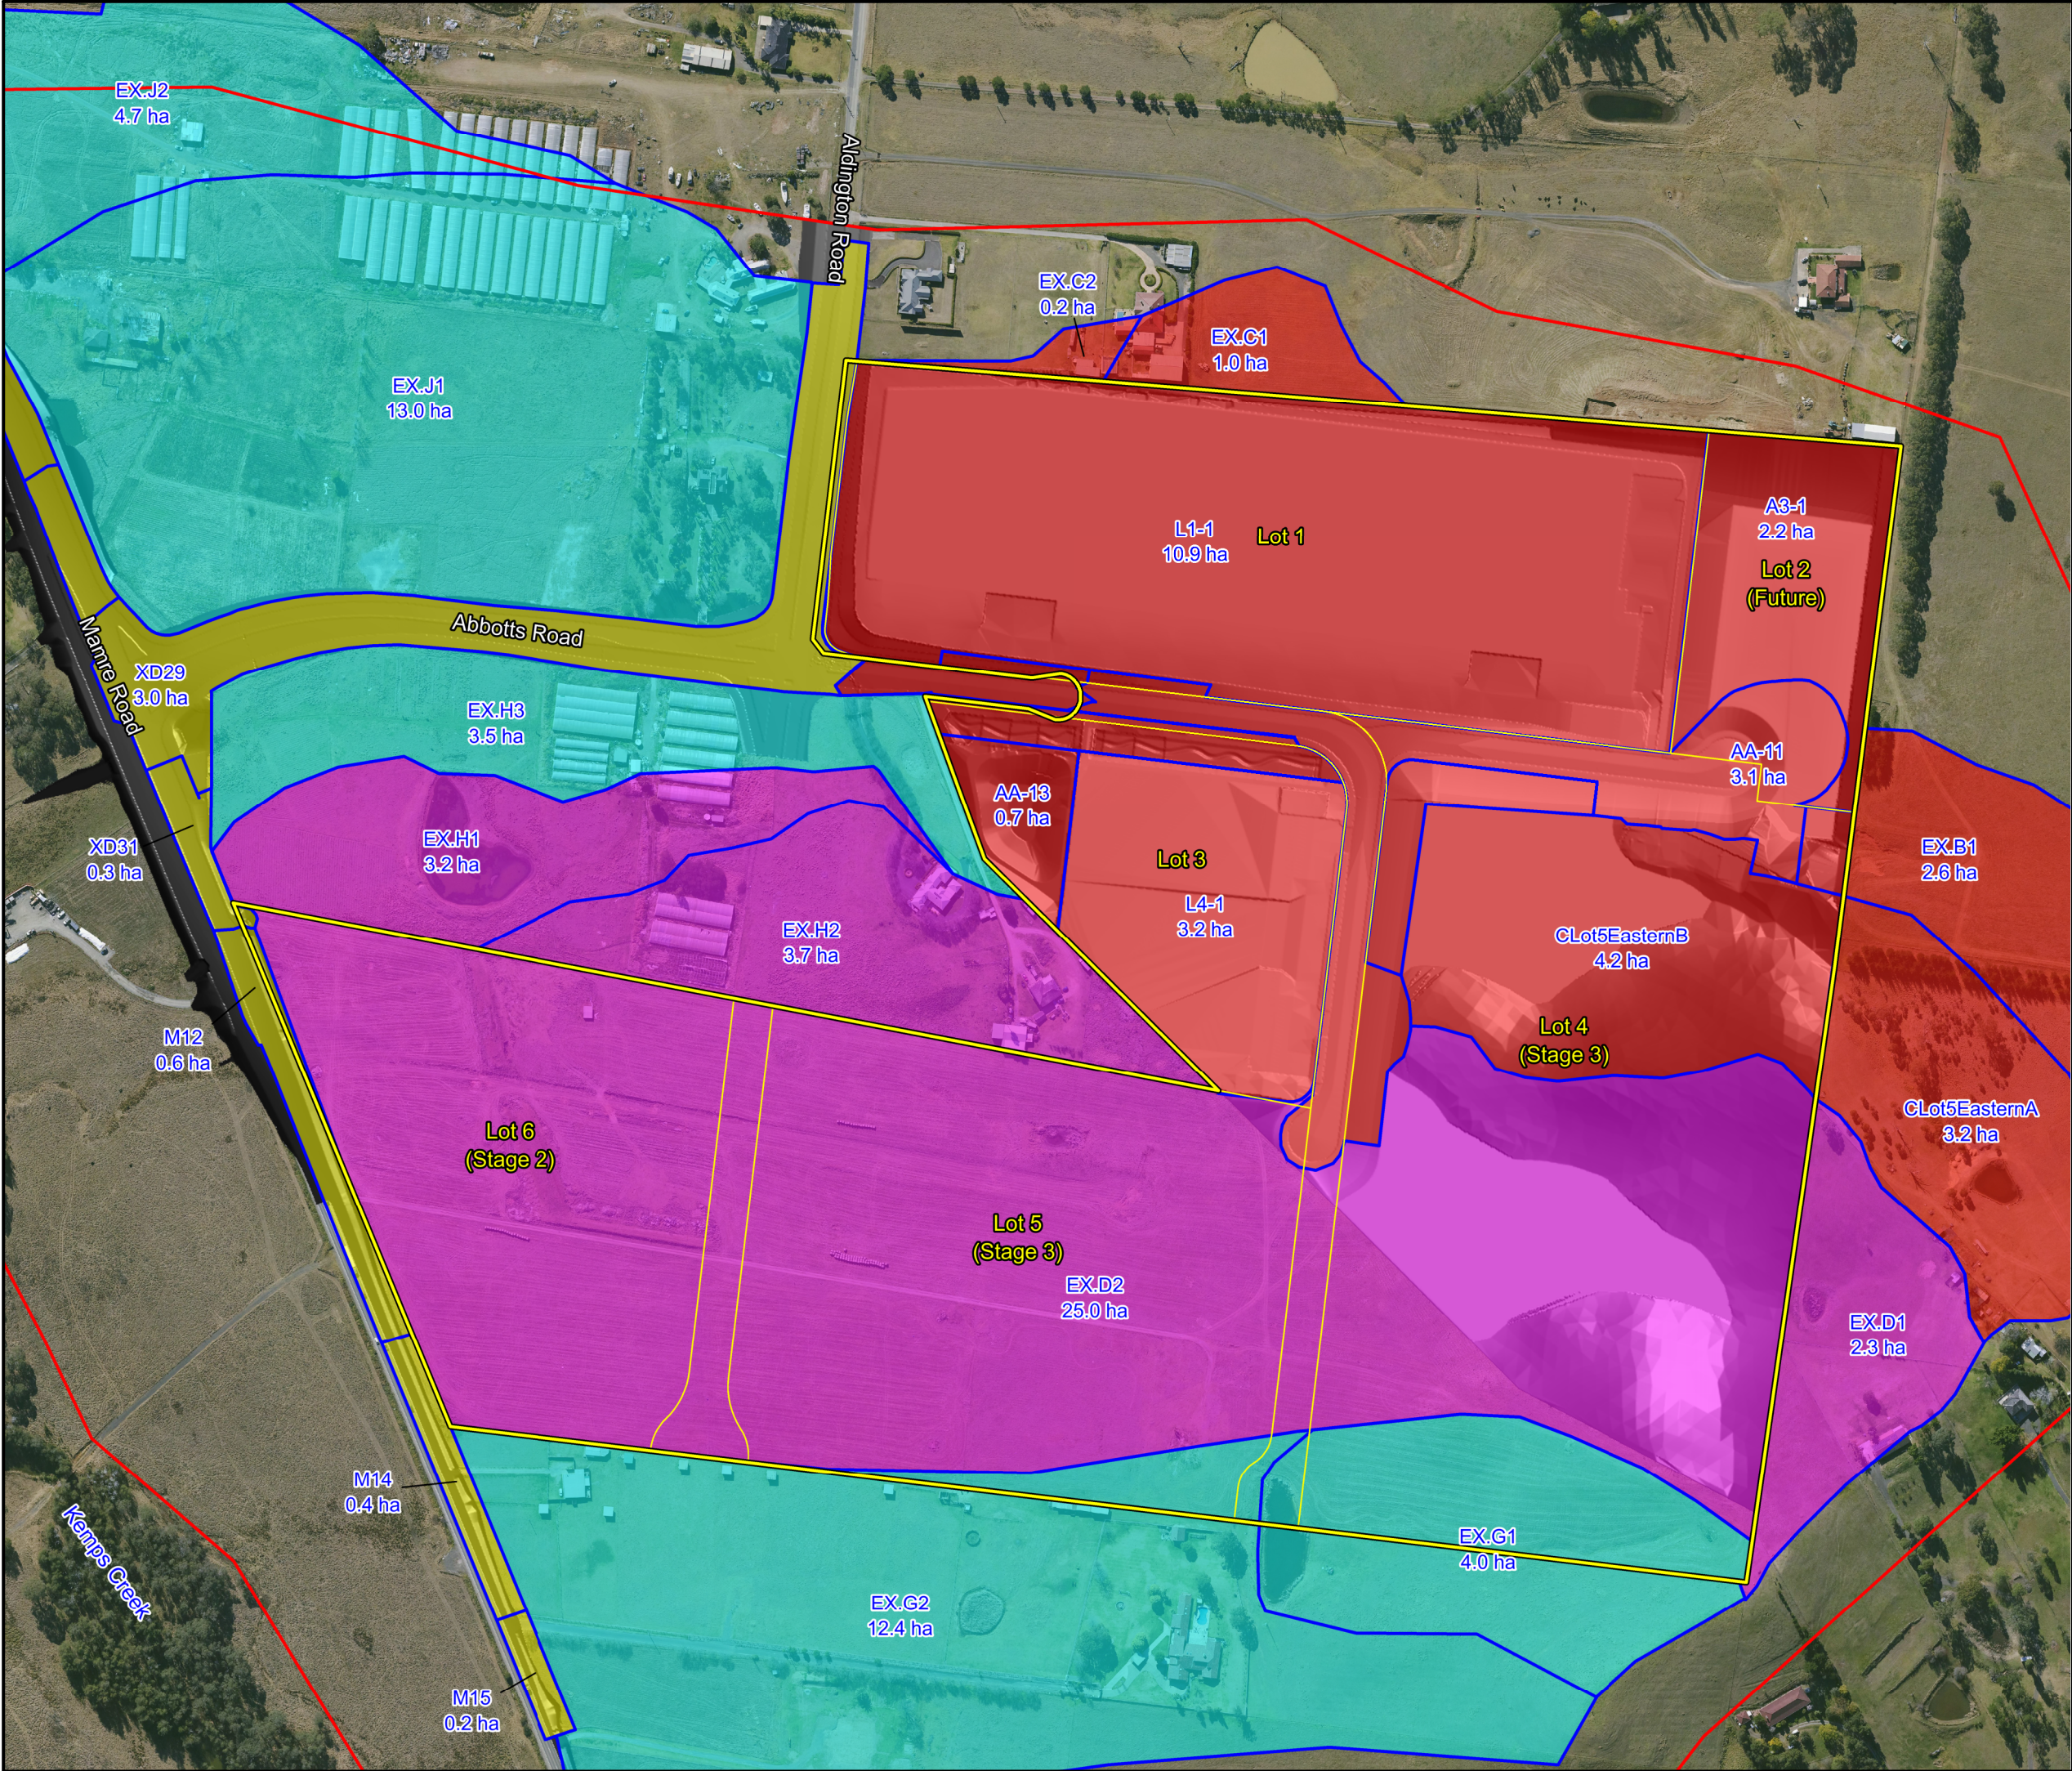



LEGEND

- Site Boundary
- Westlink Lot Boundaries
- Interim Stage 1 (Base Conditions) DEM
- TUFLOW Model Boundary
- Westlink Stage 2 Existing Catchments
- Westlink Stage 1 Interim Catchments
- Mamre/Abbotts/Aldington Catchments
- Residual Existing Catchments

0 160
metres
Scale 1:4,000 @ A3


Projection: GDA 2020 MGA Zone 56


Figure 3-1
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk

Base Conditions
Catchment Plan

Date: 3/04/2025 Issue: A


Filename: "J:\110965 - Westlink\SWF\Mapinfo\Figures\ST2 FIRA\110965-04_Fig3-2_Dev_Catchments_A.wor"

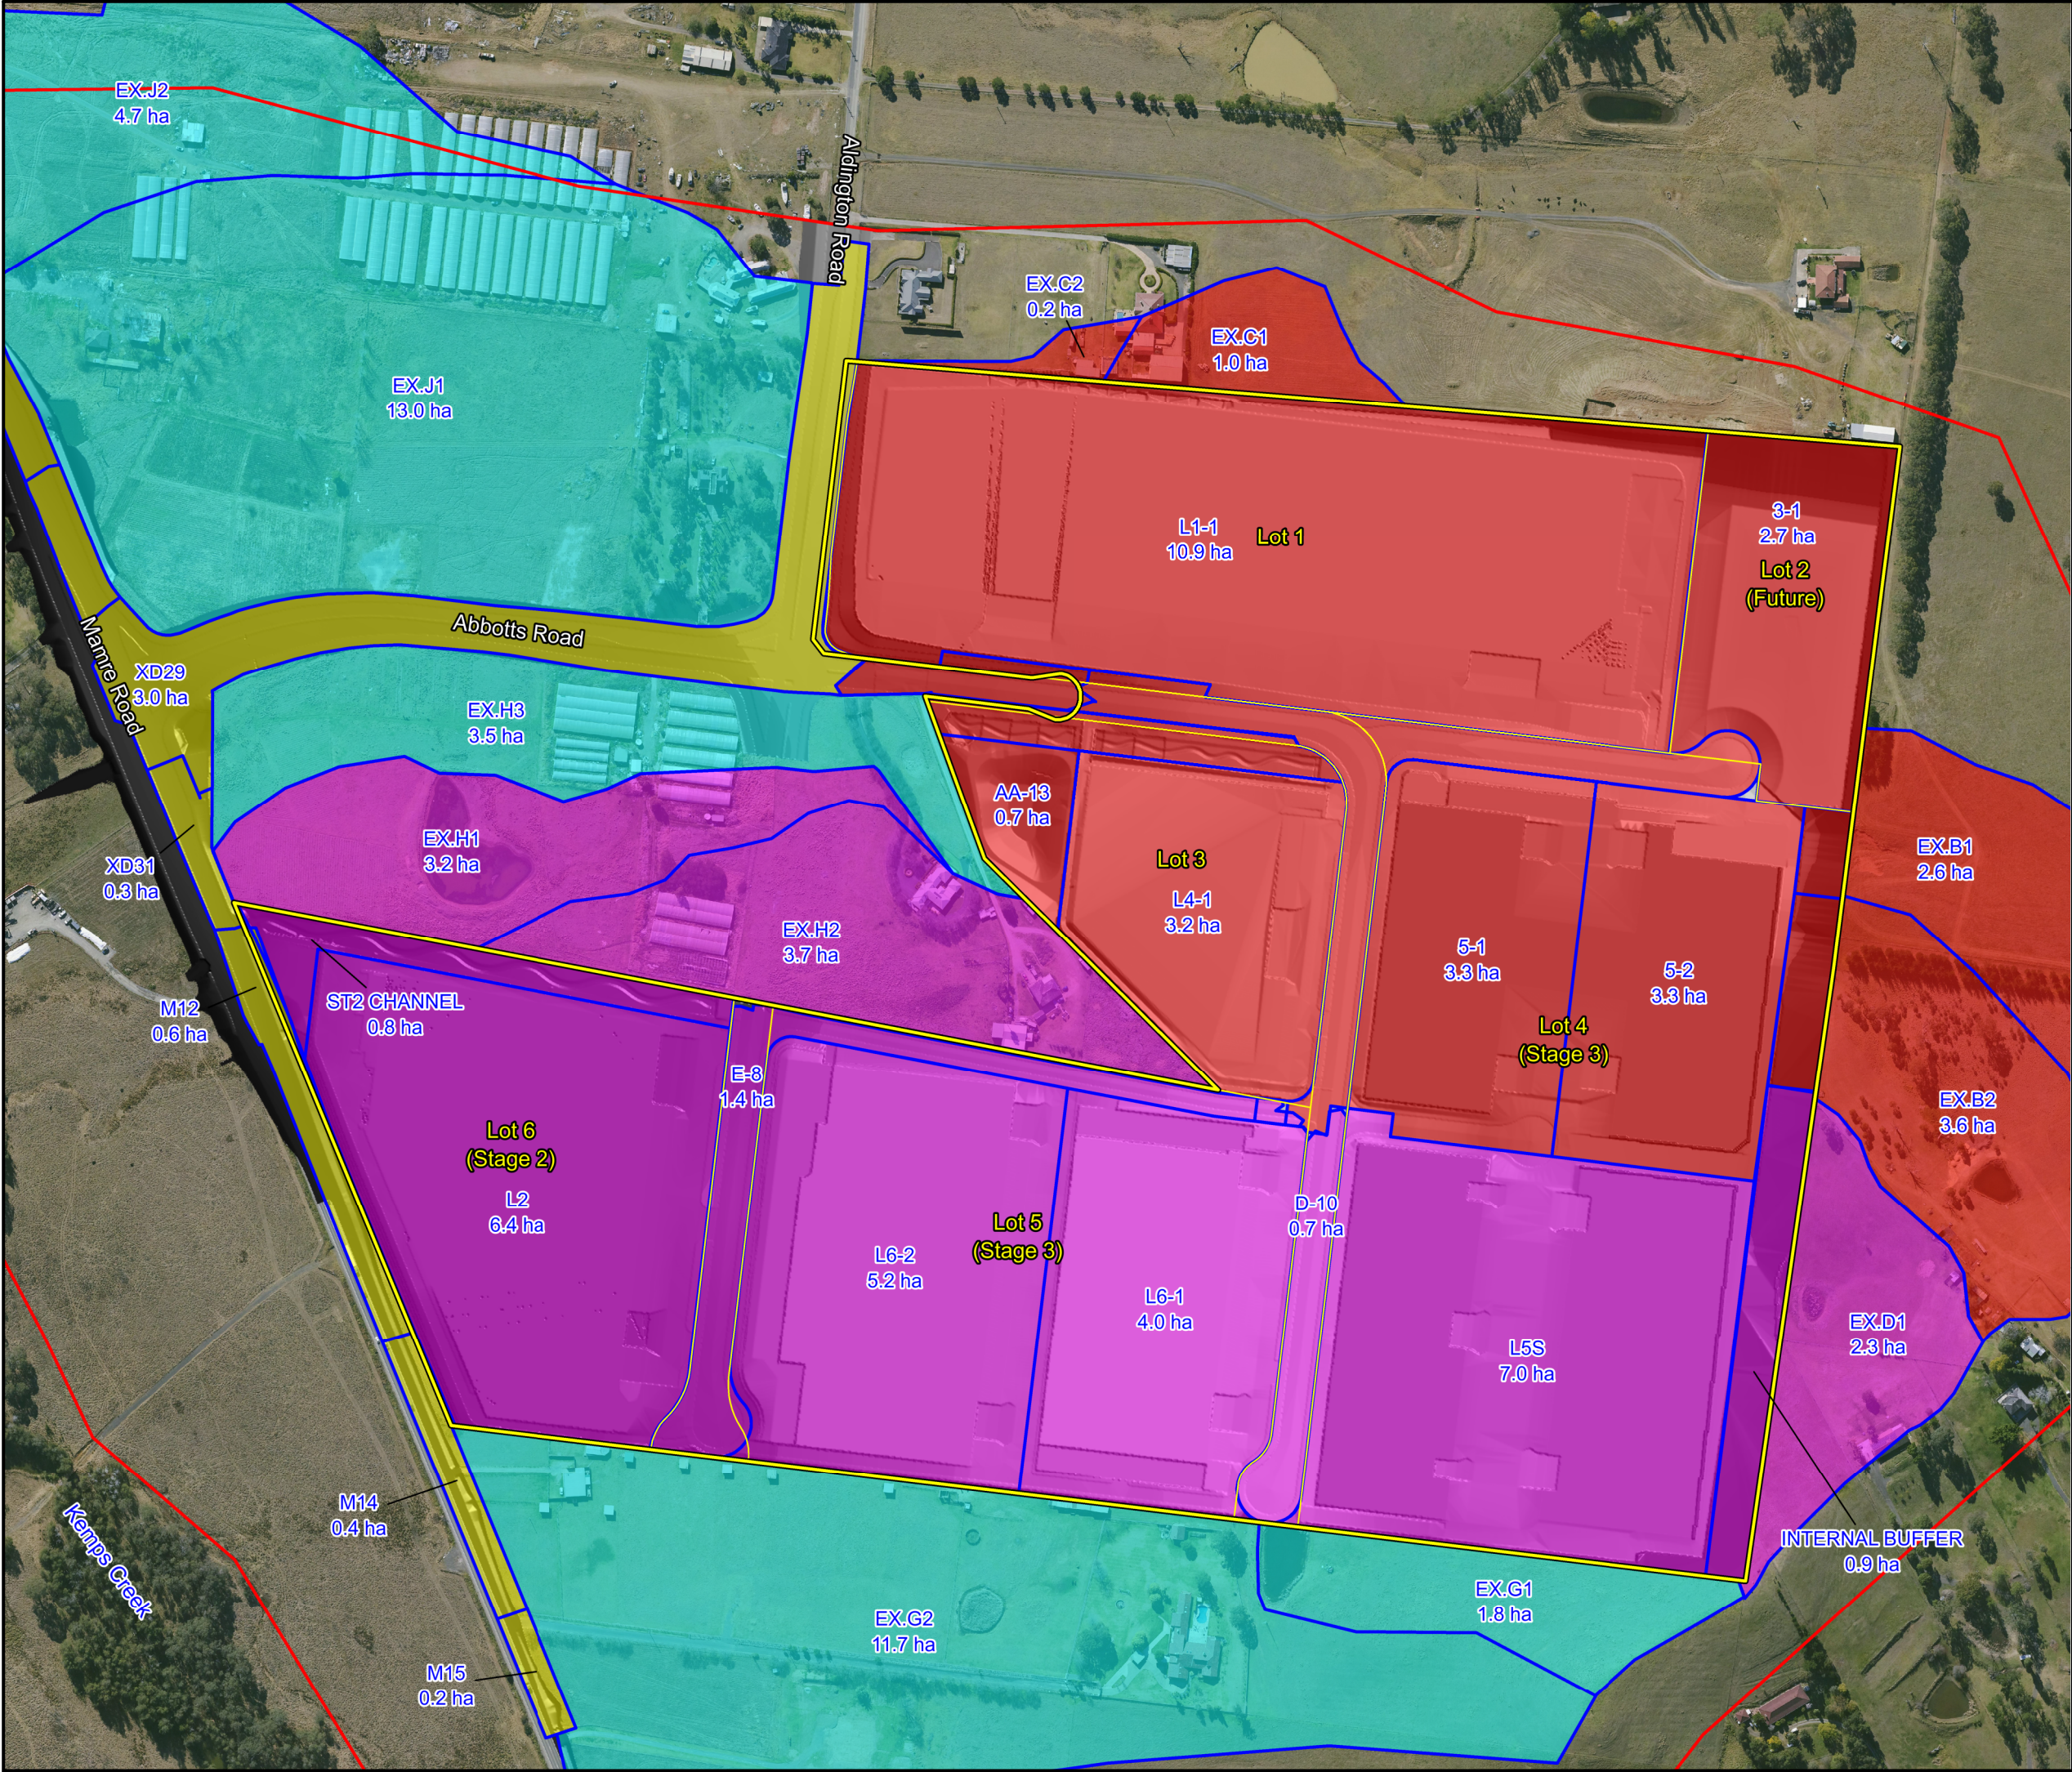



LEGEND

- Site Boundary
- Westlink Lot Boundaries
- Stage 2, Lot 4 & Lot 5 DEM
- TUFLOW Model Boundary
- Westlink Stage 2 Ultimate Catchments
- Westlink Stage 1 Ultimate Catchments
- Mamre/Abbotts/Aldington Catchments
- Residual Existing Catchments

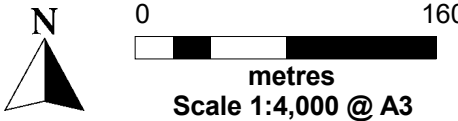

0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56


Figure 3-2
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk

Developed Conditions
Catchment Plan

Date: 3/04/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig4-1_BASE02_TFS_A.wor





LEGEND

TUFLOW MODEL ELEMENTS

- TUFLOW Model Boundary
- SA Catchment Inflow Boundary
- IWL Initial Water Level Area
- HQ Slope Boundary
- 2D LOC (Line)
- Connection Line (CN)
- 1d NWK Culvert
- 1d NWK Pit
- 2D SX Connection (Line)
- 2D ZSH Terrain Modification
- 1d QT Inflow Point

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 4-1

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


Base Conditions

TUFLOW Setup Plan

Date: 23/01/2025 Issue: A












Filename: J:\110965 - Westlink\SWFMap\info\Figures\ST2 FIRA\110965-04_Fig4-2_BASE02_TFM_A.wor






LEGEND


MANNINGS VALUE

	0.020 Road Reserve
	0.100 Farm Sheds
	0.050 Light Vegetation
	0.080 Medium Vegetation
	0.100 Dense Vegetation
	0.020 Waterbody
	0.100 Riparian Replanting (Dense Vegetation)
	0.013 Concrete Surface
	2.000 Building
	Site Boundary
	TUFLOW Model Boundary



N

0 160



metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56


Figure 4-2

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


Base Conditions
TUFLOW Materials Plan

Date: 23/01/2025 Issue: A












Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig4-4_DES04_TFM_A.wor








LEGEND

MANNINGS VALUE

	0.020 Road Reserve
	0.100 Farm Sheds
	0.050 Light Vegetation
	0.080 Medium Vegetation
	0.100 Dense Vegetation
	0.020 Waterbody
	0.100 Riparian Replanting (Dense Vegetation)
	0.013 Concrete Surface
	2.000 Building

 Site Boundary

 TUFLOW Model Boundary

 0 160
metres
Scale 1:4,000 @ A3


Projection: GDA 2020 MGA Zone 56

Figure 4-4
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk

Developed Conditions
TUFLOW Materials Plan








Date: 23/01/2025 Issue: A








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +

 35.0 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Interim Stage 1 (Base Conditions) DEM

 TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-1

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


5% AEP

Base Conditions NoTW

Flood Depths and Levels








Date: 22/01/2025 Issue: A








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 35.0 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Interim Stage 1 (Base Conditions) DEM

 TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-2
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
1% AEP
Base Conditions NoTW
Flood Depths and Levels








Date: 22/01/2025 Issue: A








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 35.0 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Interim Stage 1 (Base Conditions) DEM

 TUFLOW Model Boundary

 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-3
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
0.5% AEP
Base Conditions NoTW
Flood Depths and Levels

Date: 22/01/2025 Issue: A



LEGEND

FLOOD DEPTH (m)

0.0 to 0.1	0.1 to 0.2	0.2 to 0.3	0.3 to 0.5	0.5 to 1.0	1.0 to 2.0	2.0 +
------------	------------	------------	------------	------------	------------	-------

35.0 0.5 m Flood Contours

Site Boundary

Westlink Lot Boundaries

Interim Stage 1 (Base Conditions) DEM

TUFLOW Model Boundary

N


0 160


metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-4
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
0.2% AEP
Base Conditions NoTW
Flood Depths and Levels

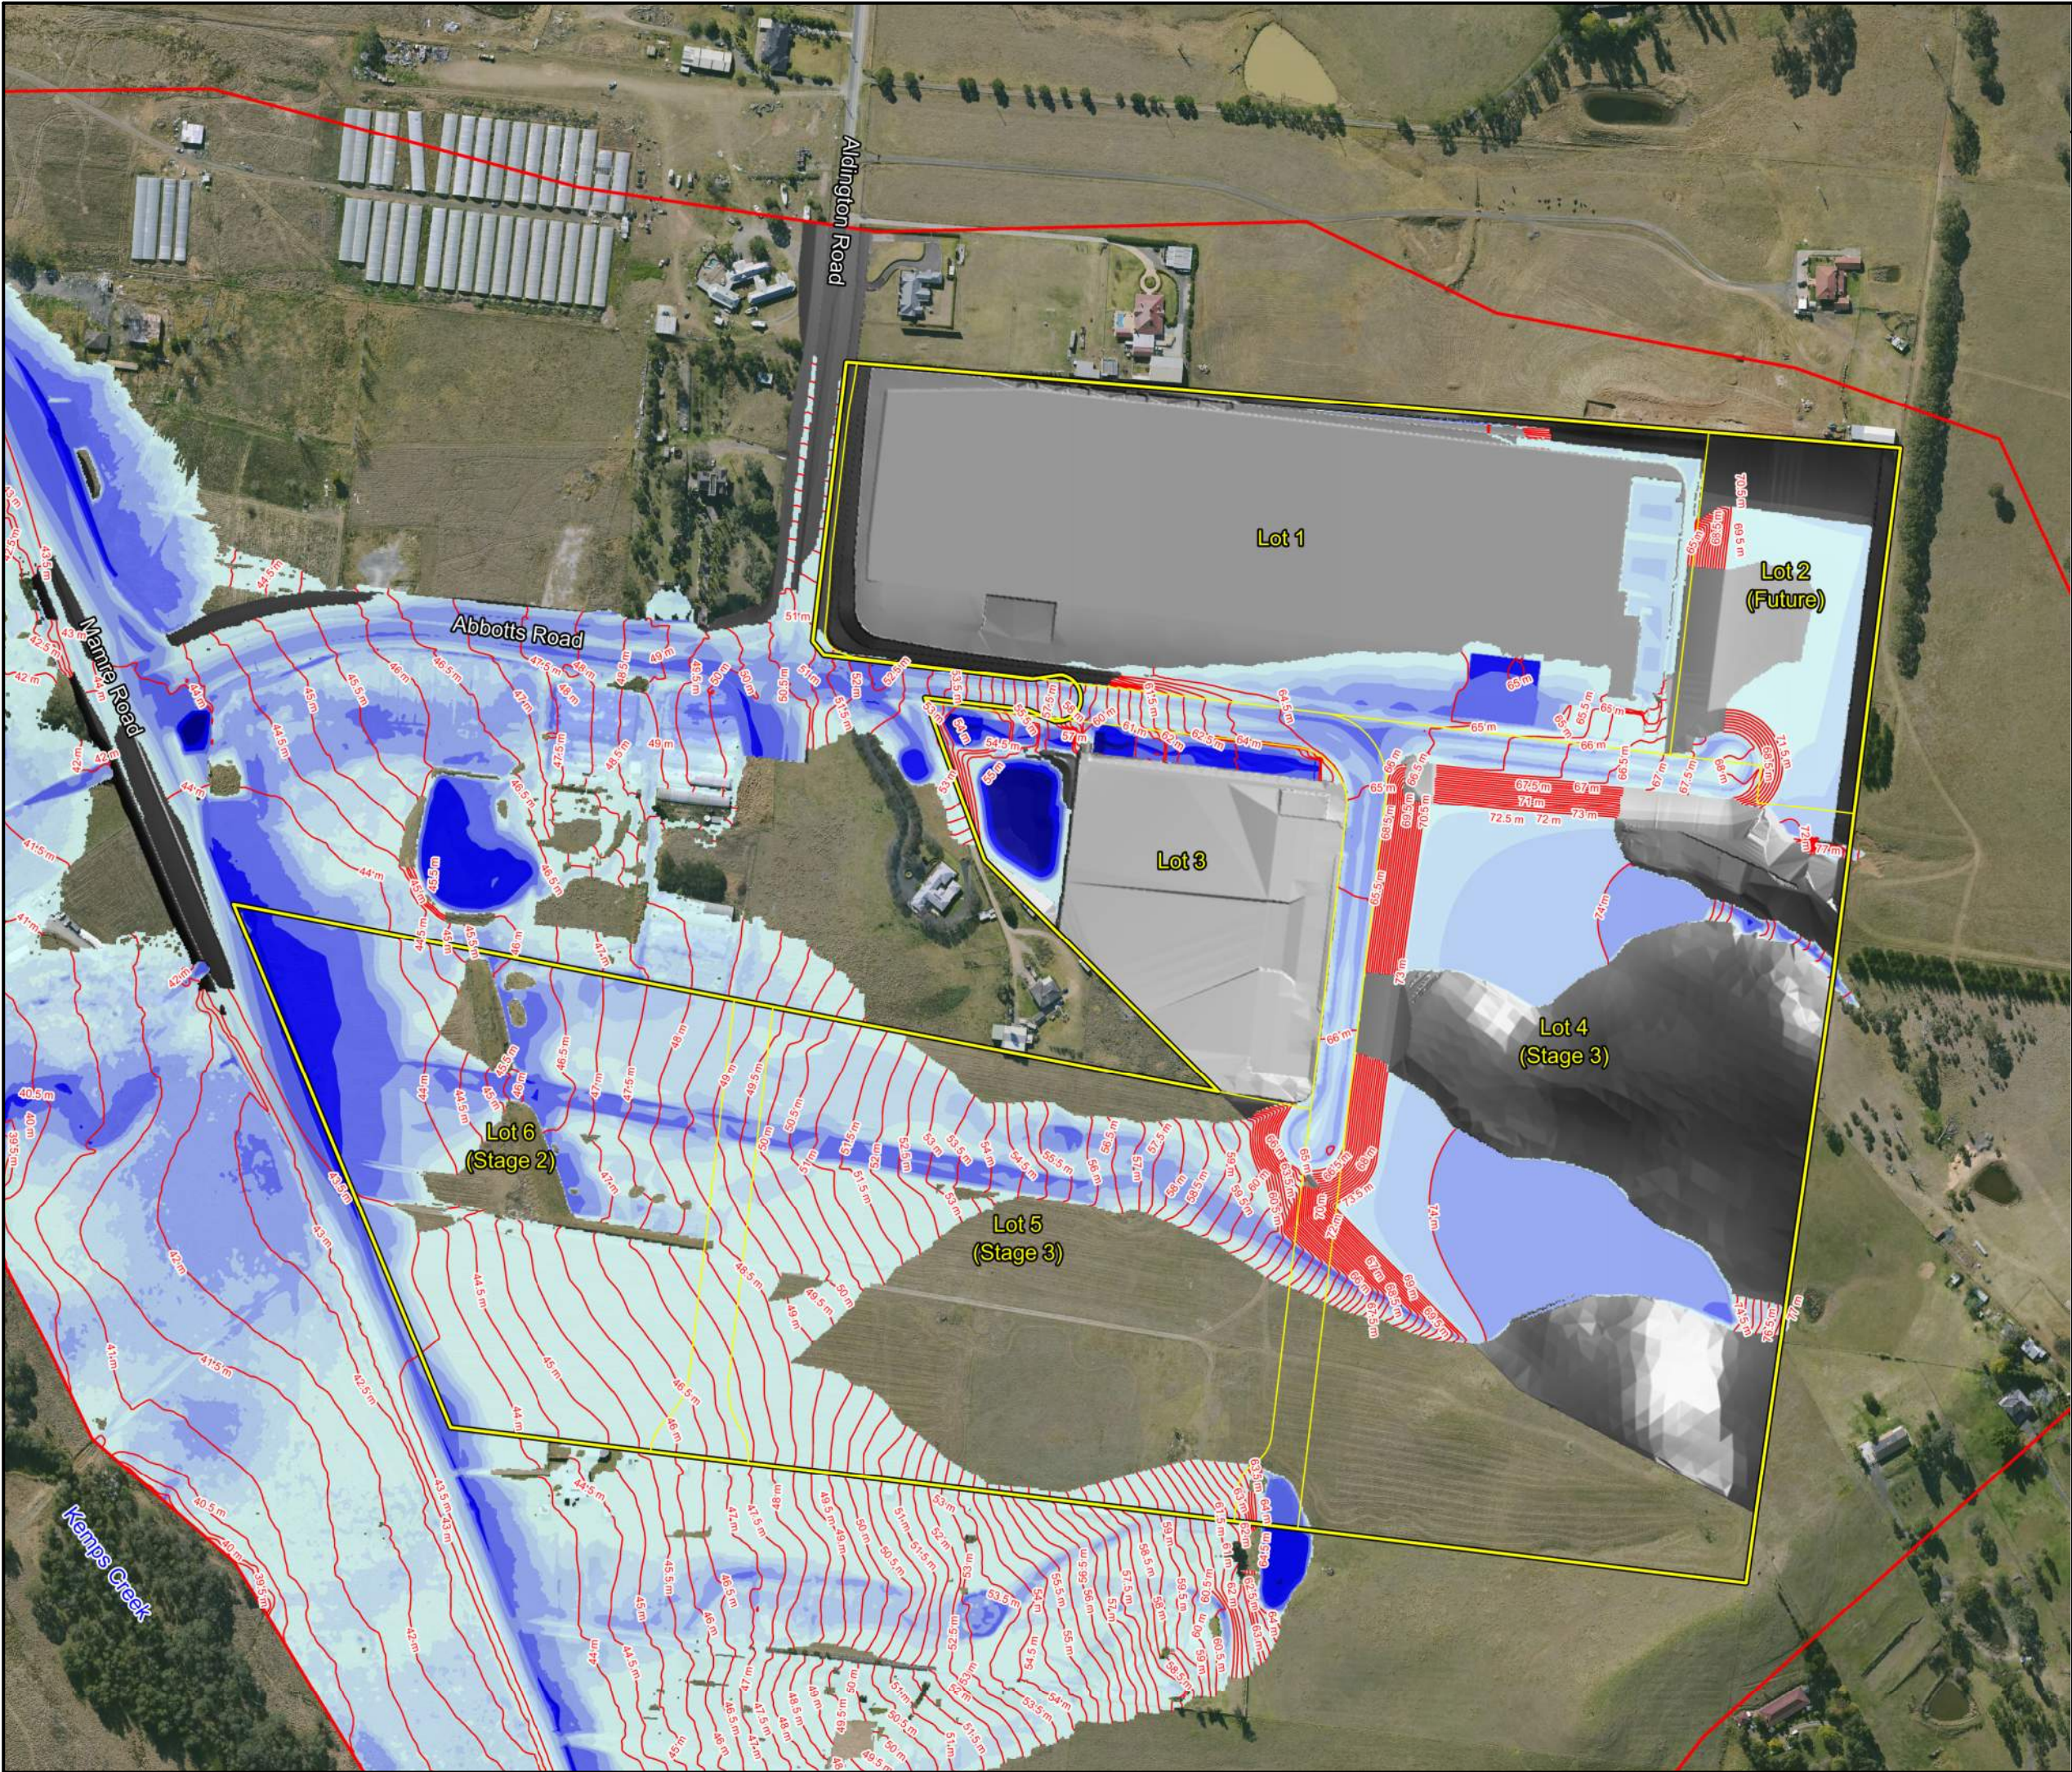



LEGEND

FLOOD DEPTH (m)

	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


35.0 0.5 m Flood Contours

Site Boundary

Westlink Lot Boundaries

Interim Stage 1 (Base Conditions) DEM

TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-5
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
PMF
Base Conditions NoTW
Flood Depths and Levels








Date: 22/01/2025 Issue: A








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 35.0 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Stage 2, Lot 4 & Lot 5 DEM


 TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-6
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
5% AEP
Developed Conditions NoTW
Flood Depths and Levels





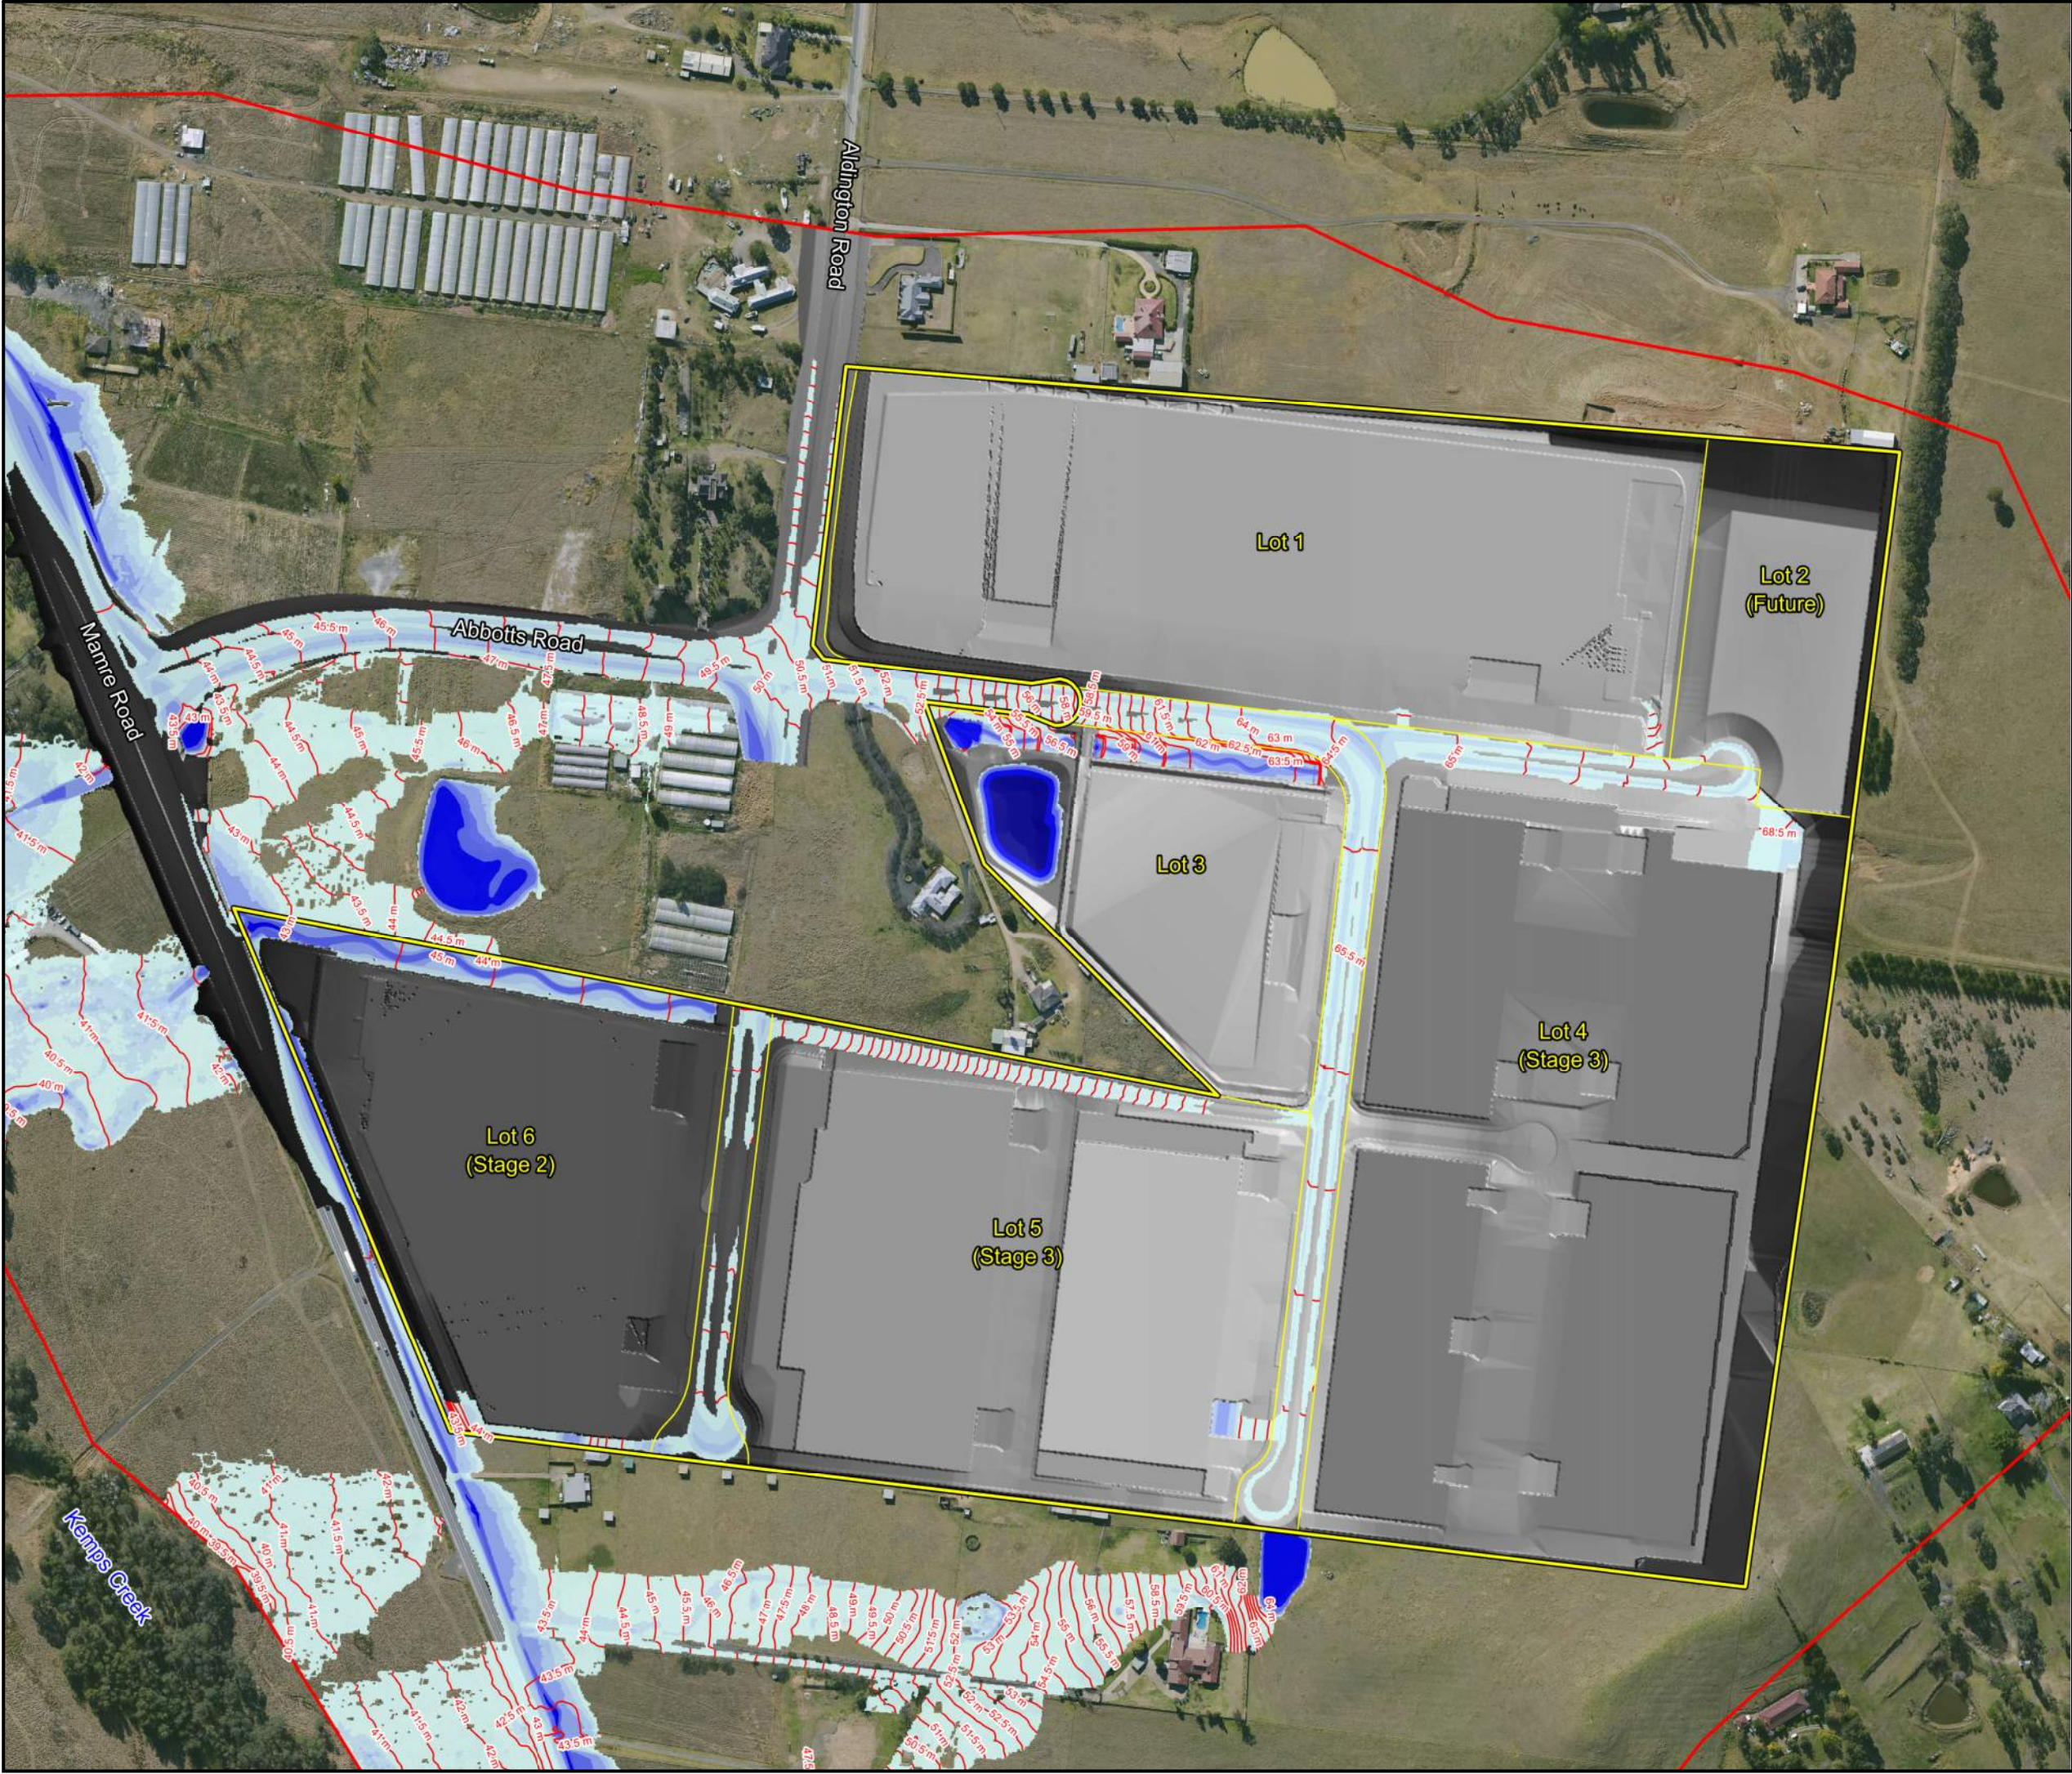


Date: 22/01/2025 Issue: A








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Stage 2, Lot 4 & Lot 5 DEM

 TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3


Projection: GDA 2020 MGA Zone 56

Figure 5-7
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
1% AEP
Developed Conditions NoTW
Flood Depths and Levels

Date: 22/01/2025 Issue: A





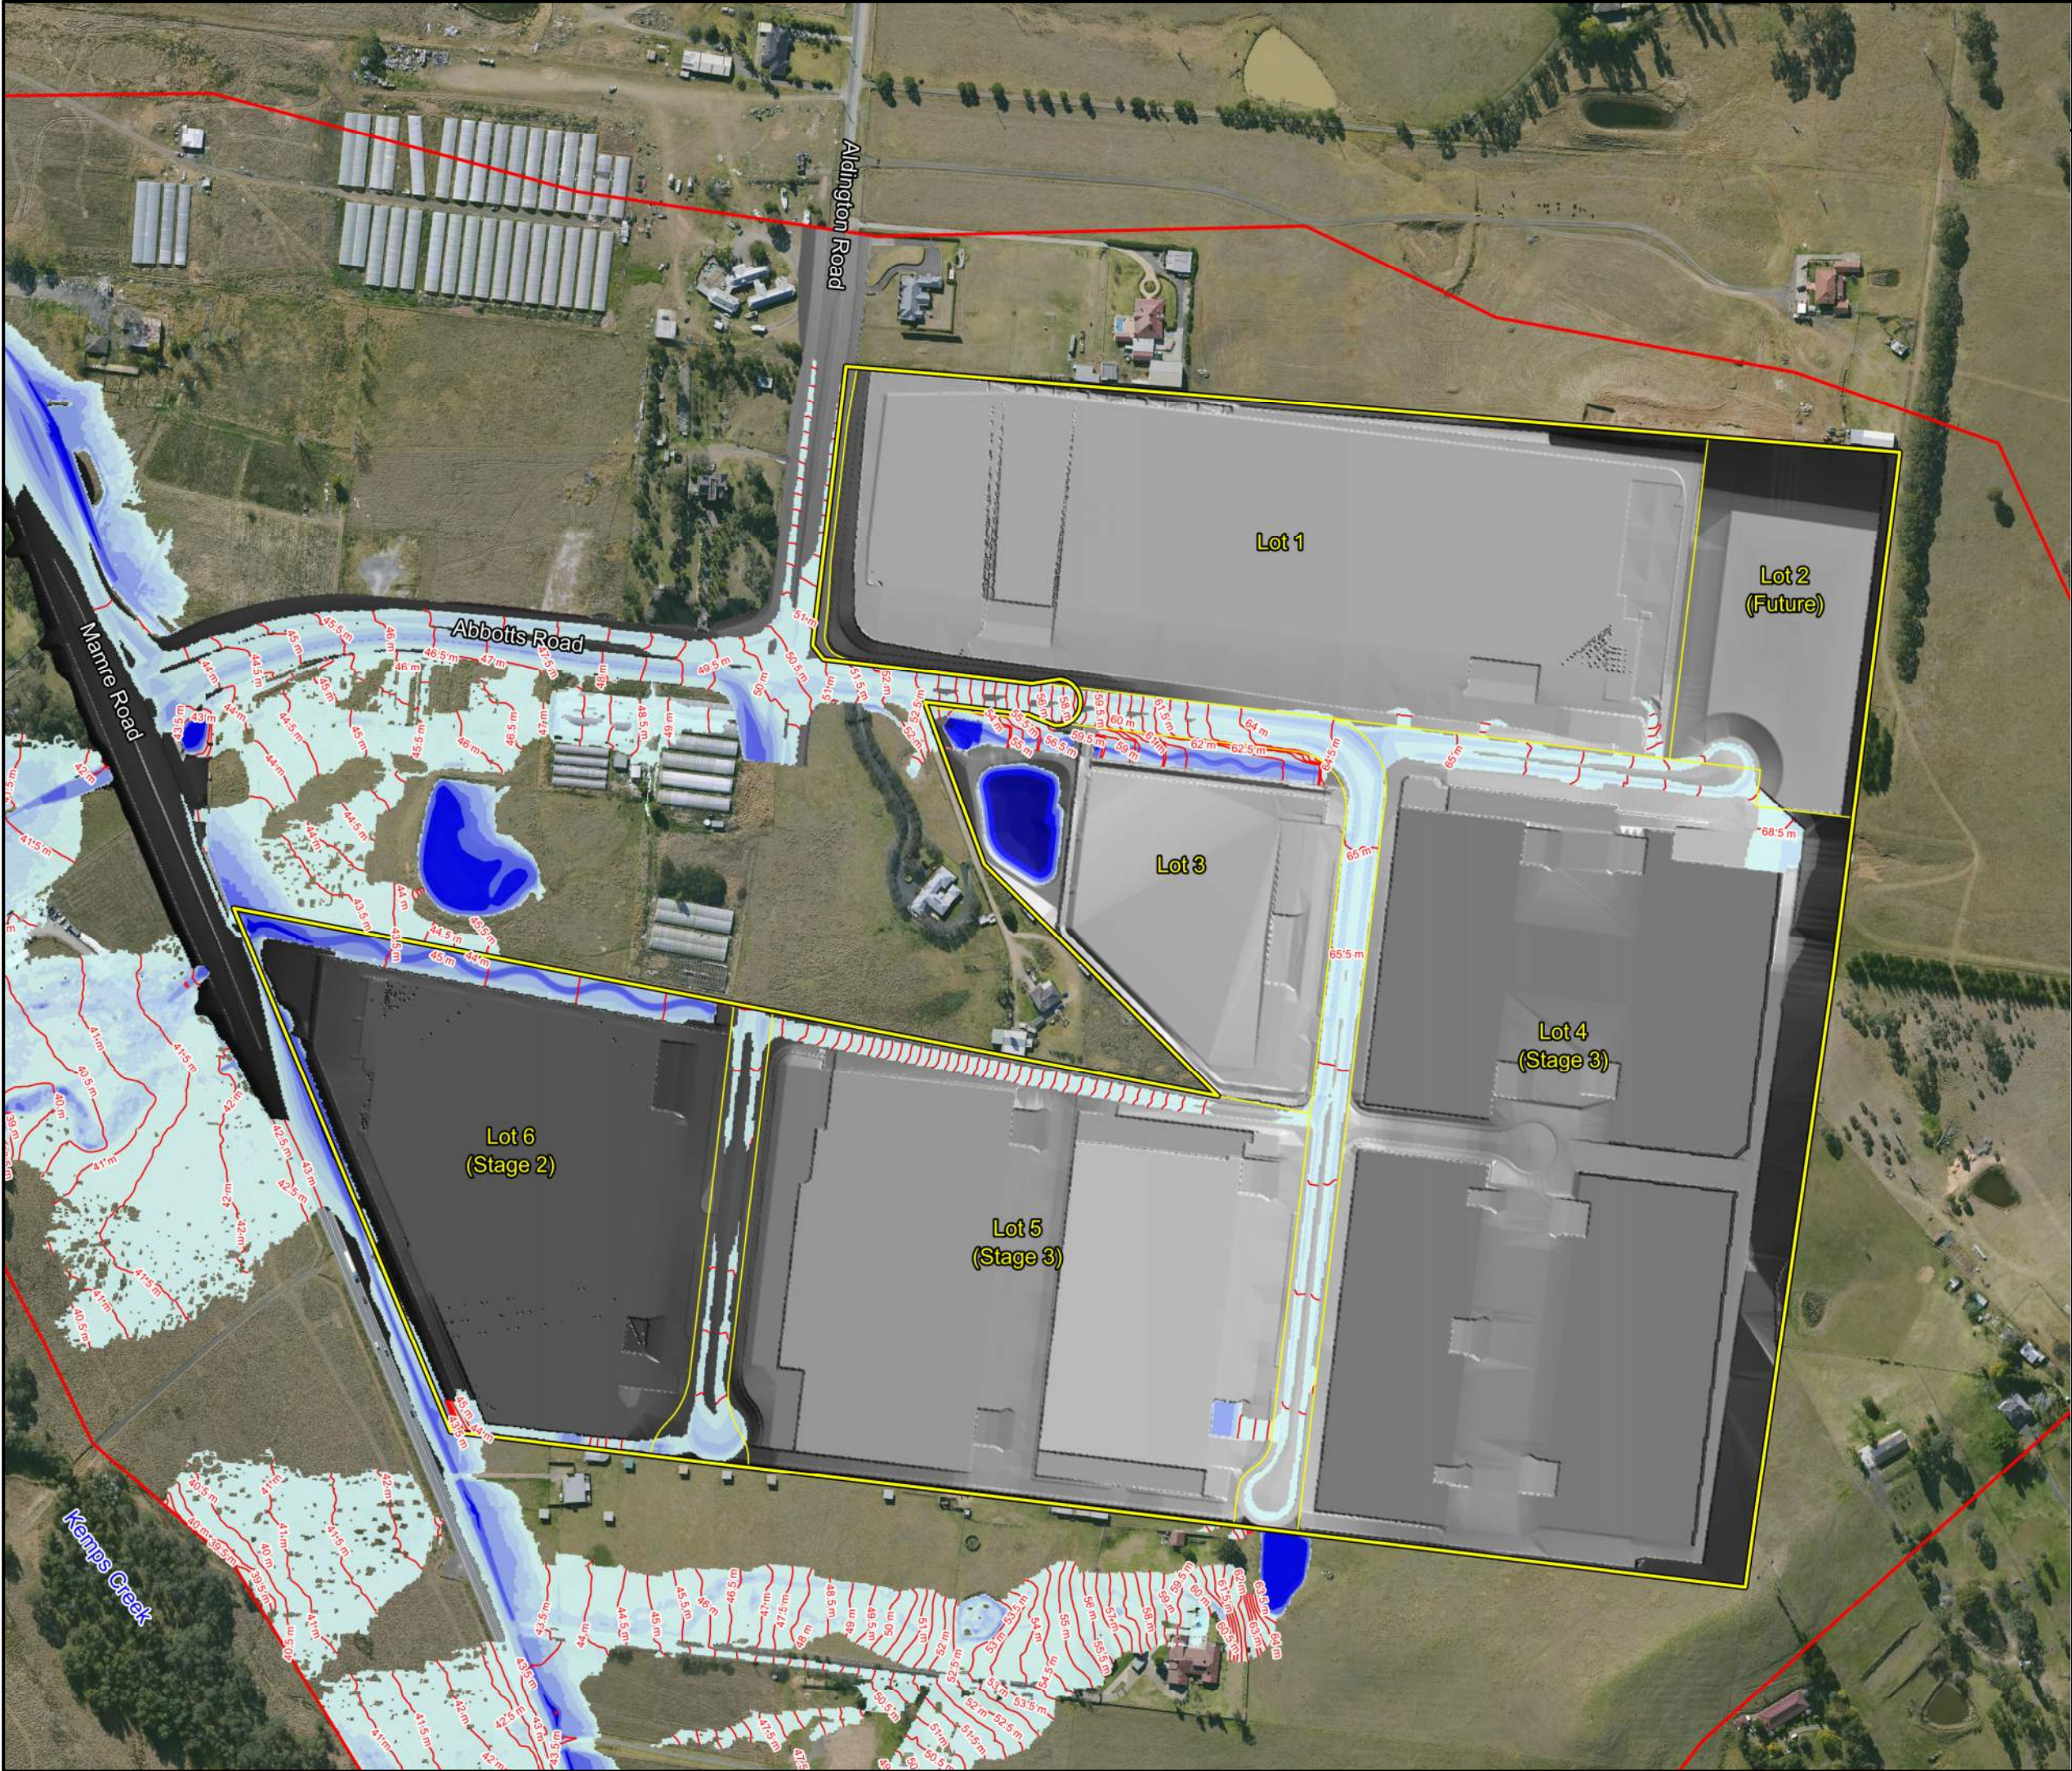


Filename: J:\110965 - Westlink\SWFMapinfolFigures\ST2 FIRA\110965-04_Fig5-8_DES04_0p5pc_DEP_A.wor








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 35.0 0.5 m Flood Contours


 Site Boundary

 Westlink Lot Boundaries

 Stage 2, Lot 4 & Lot 5 DEM

 TUFLOW Model Boundary

 N

0  160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-8

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


0.5% AEP


Developed Conditions NoTW

Flood Depths and Levels

Date: 22/01/2025 Issue: A





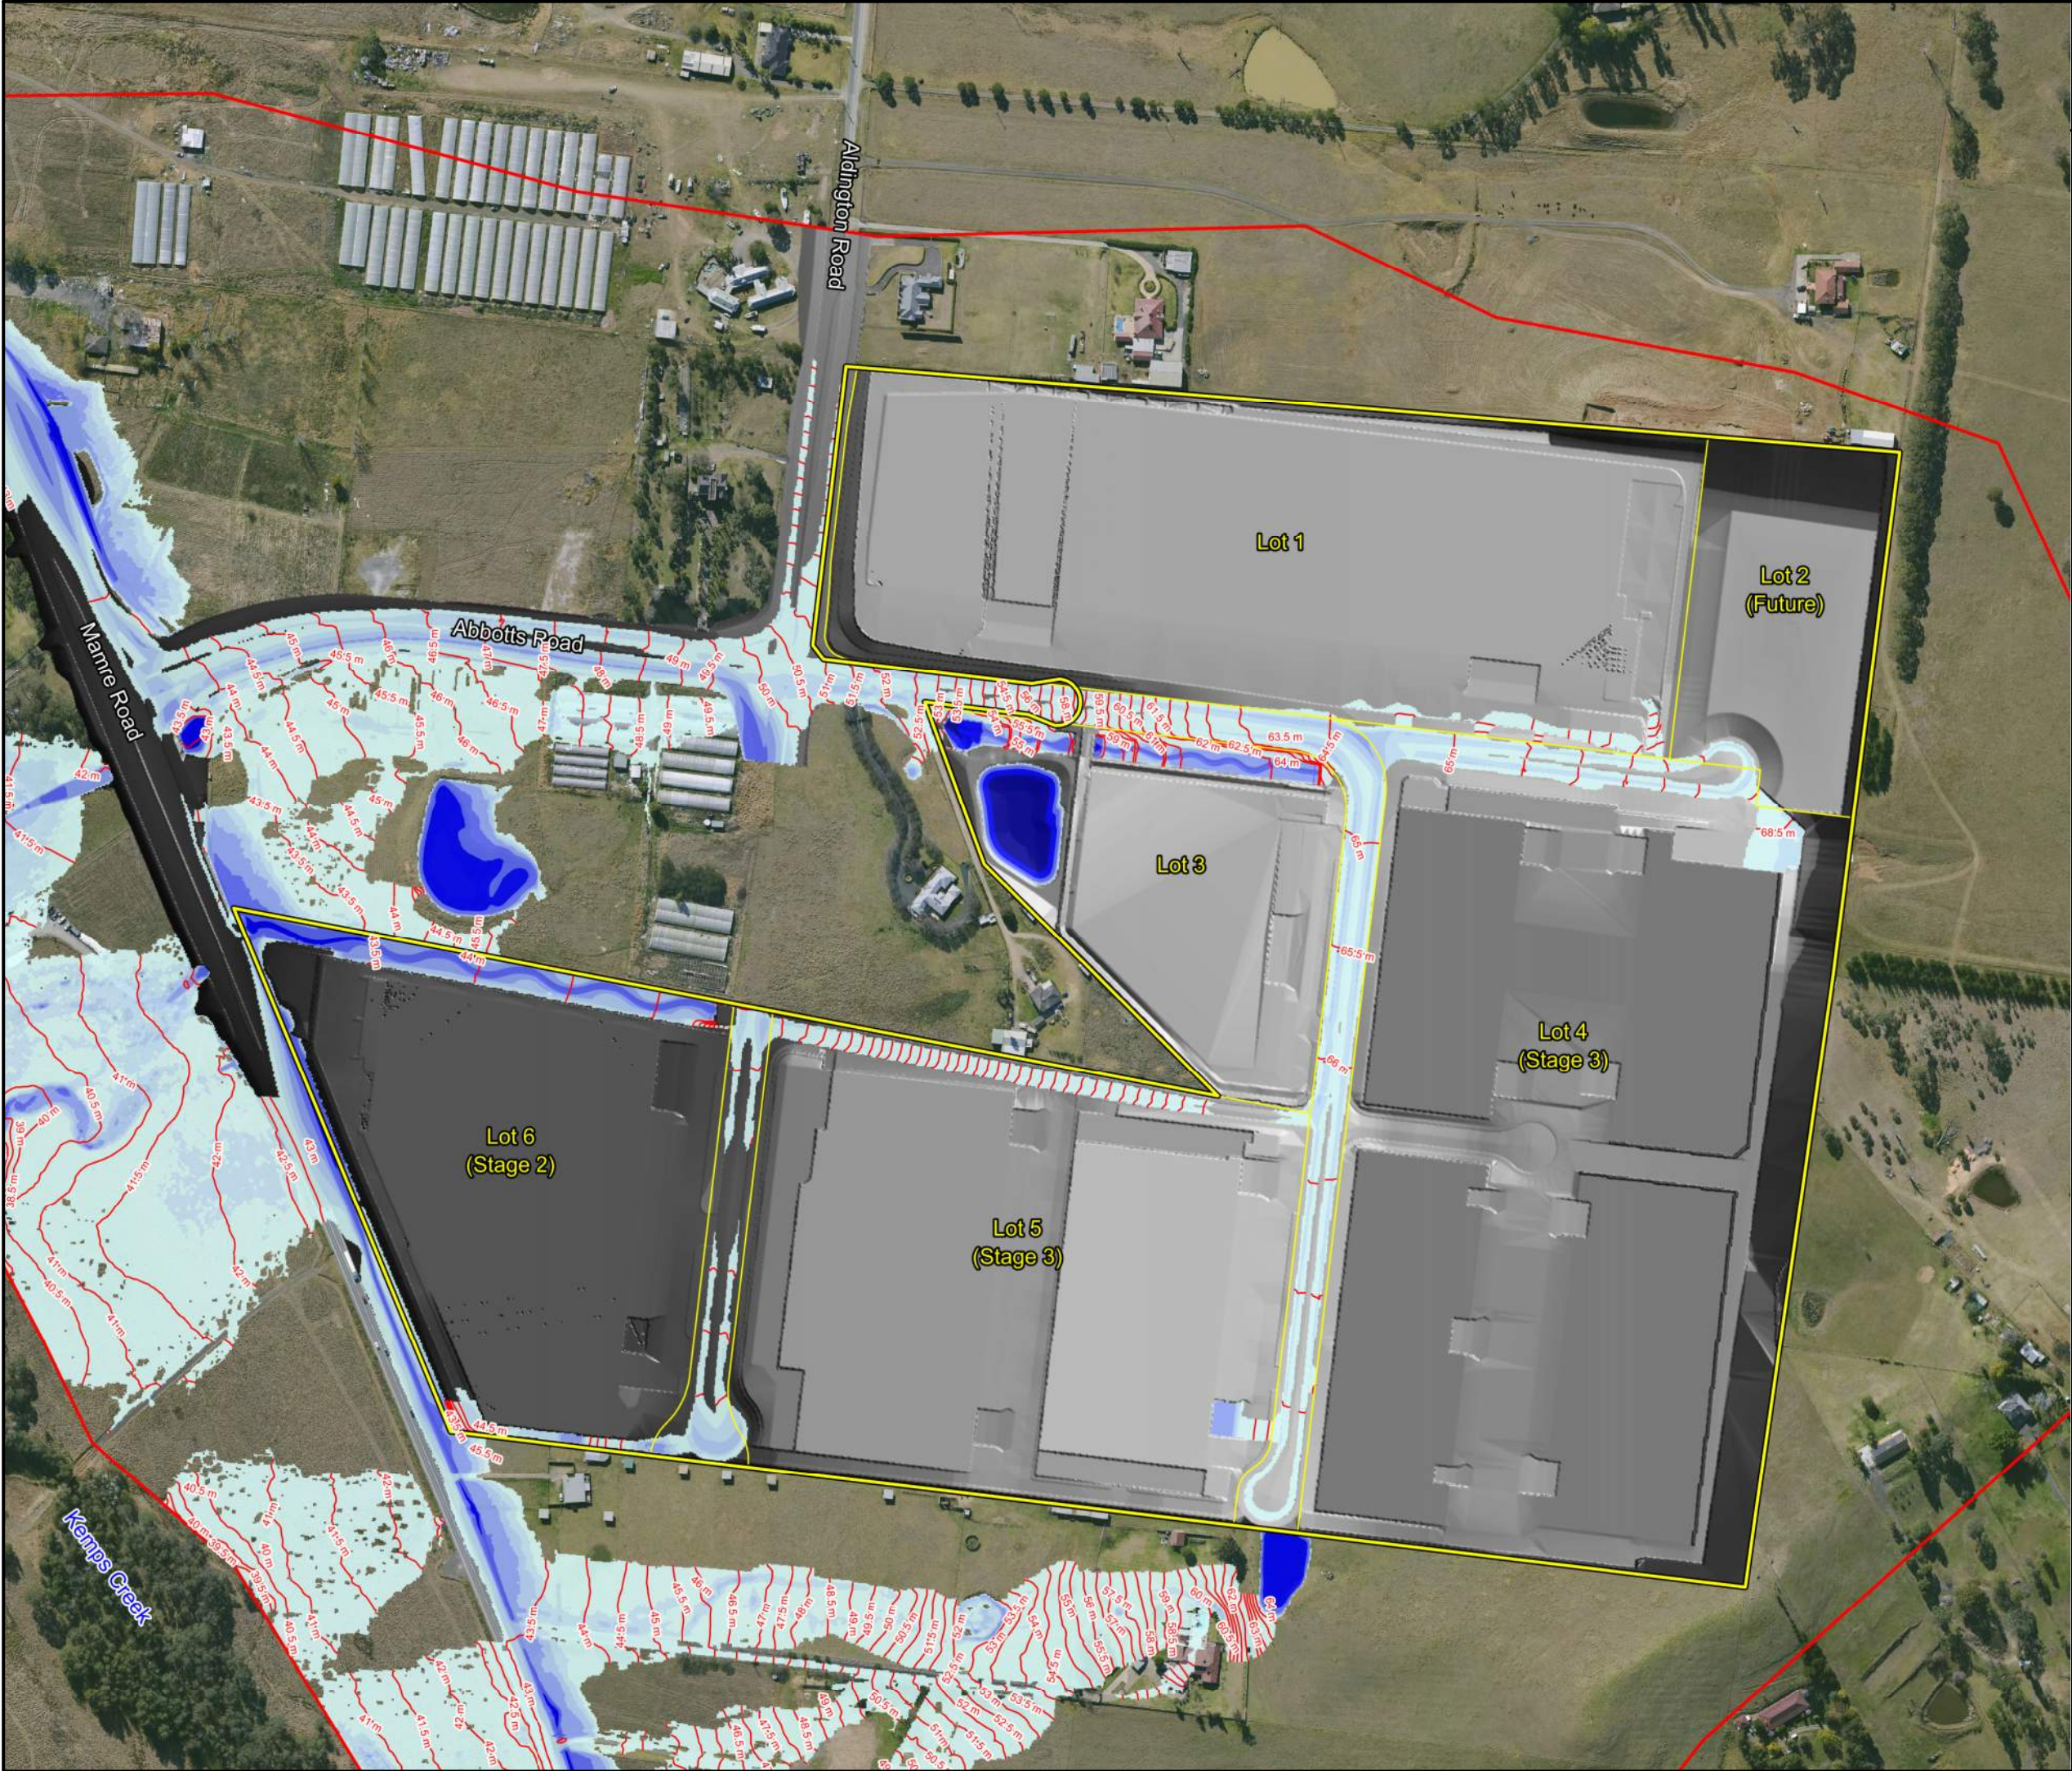


Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-9_DES04_0p2pc_DEP_A.wor








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Stage 2, Lot 4 & Lot 5 DEM


 TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-9
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
0.2% AEP
Developed Conditions NoTW
Flood Depths and Levels





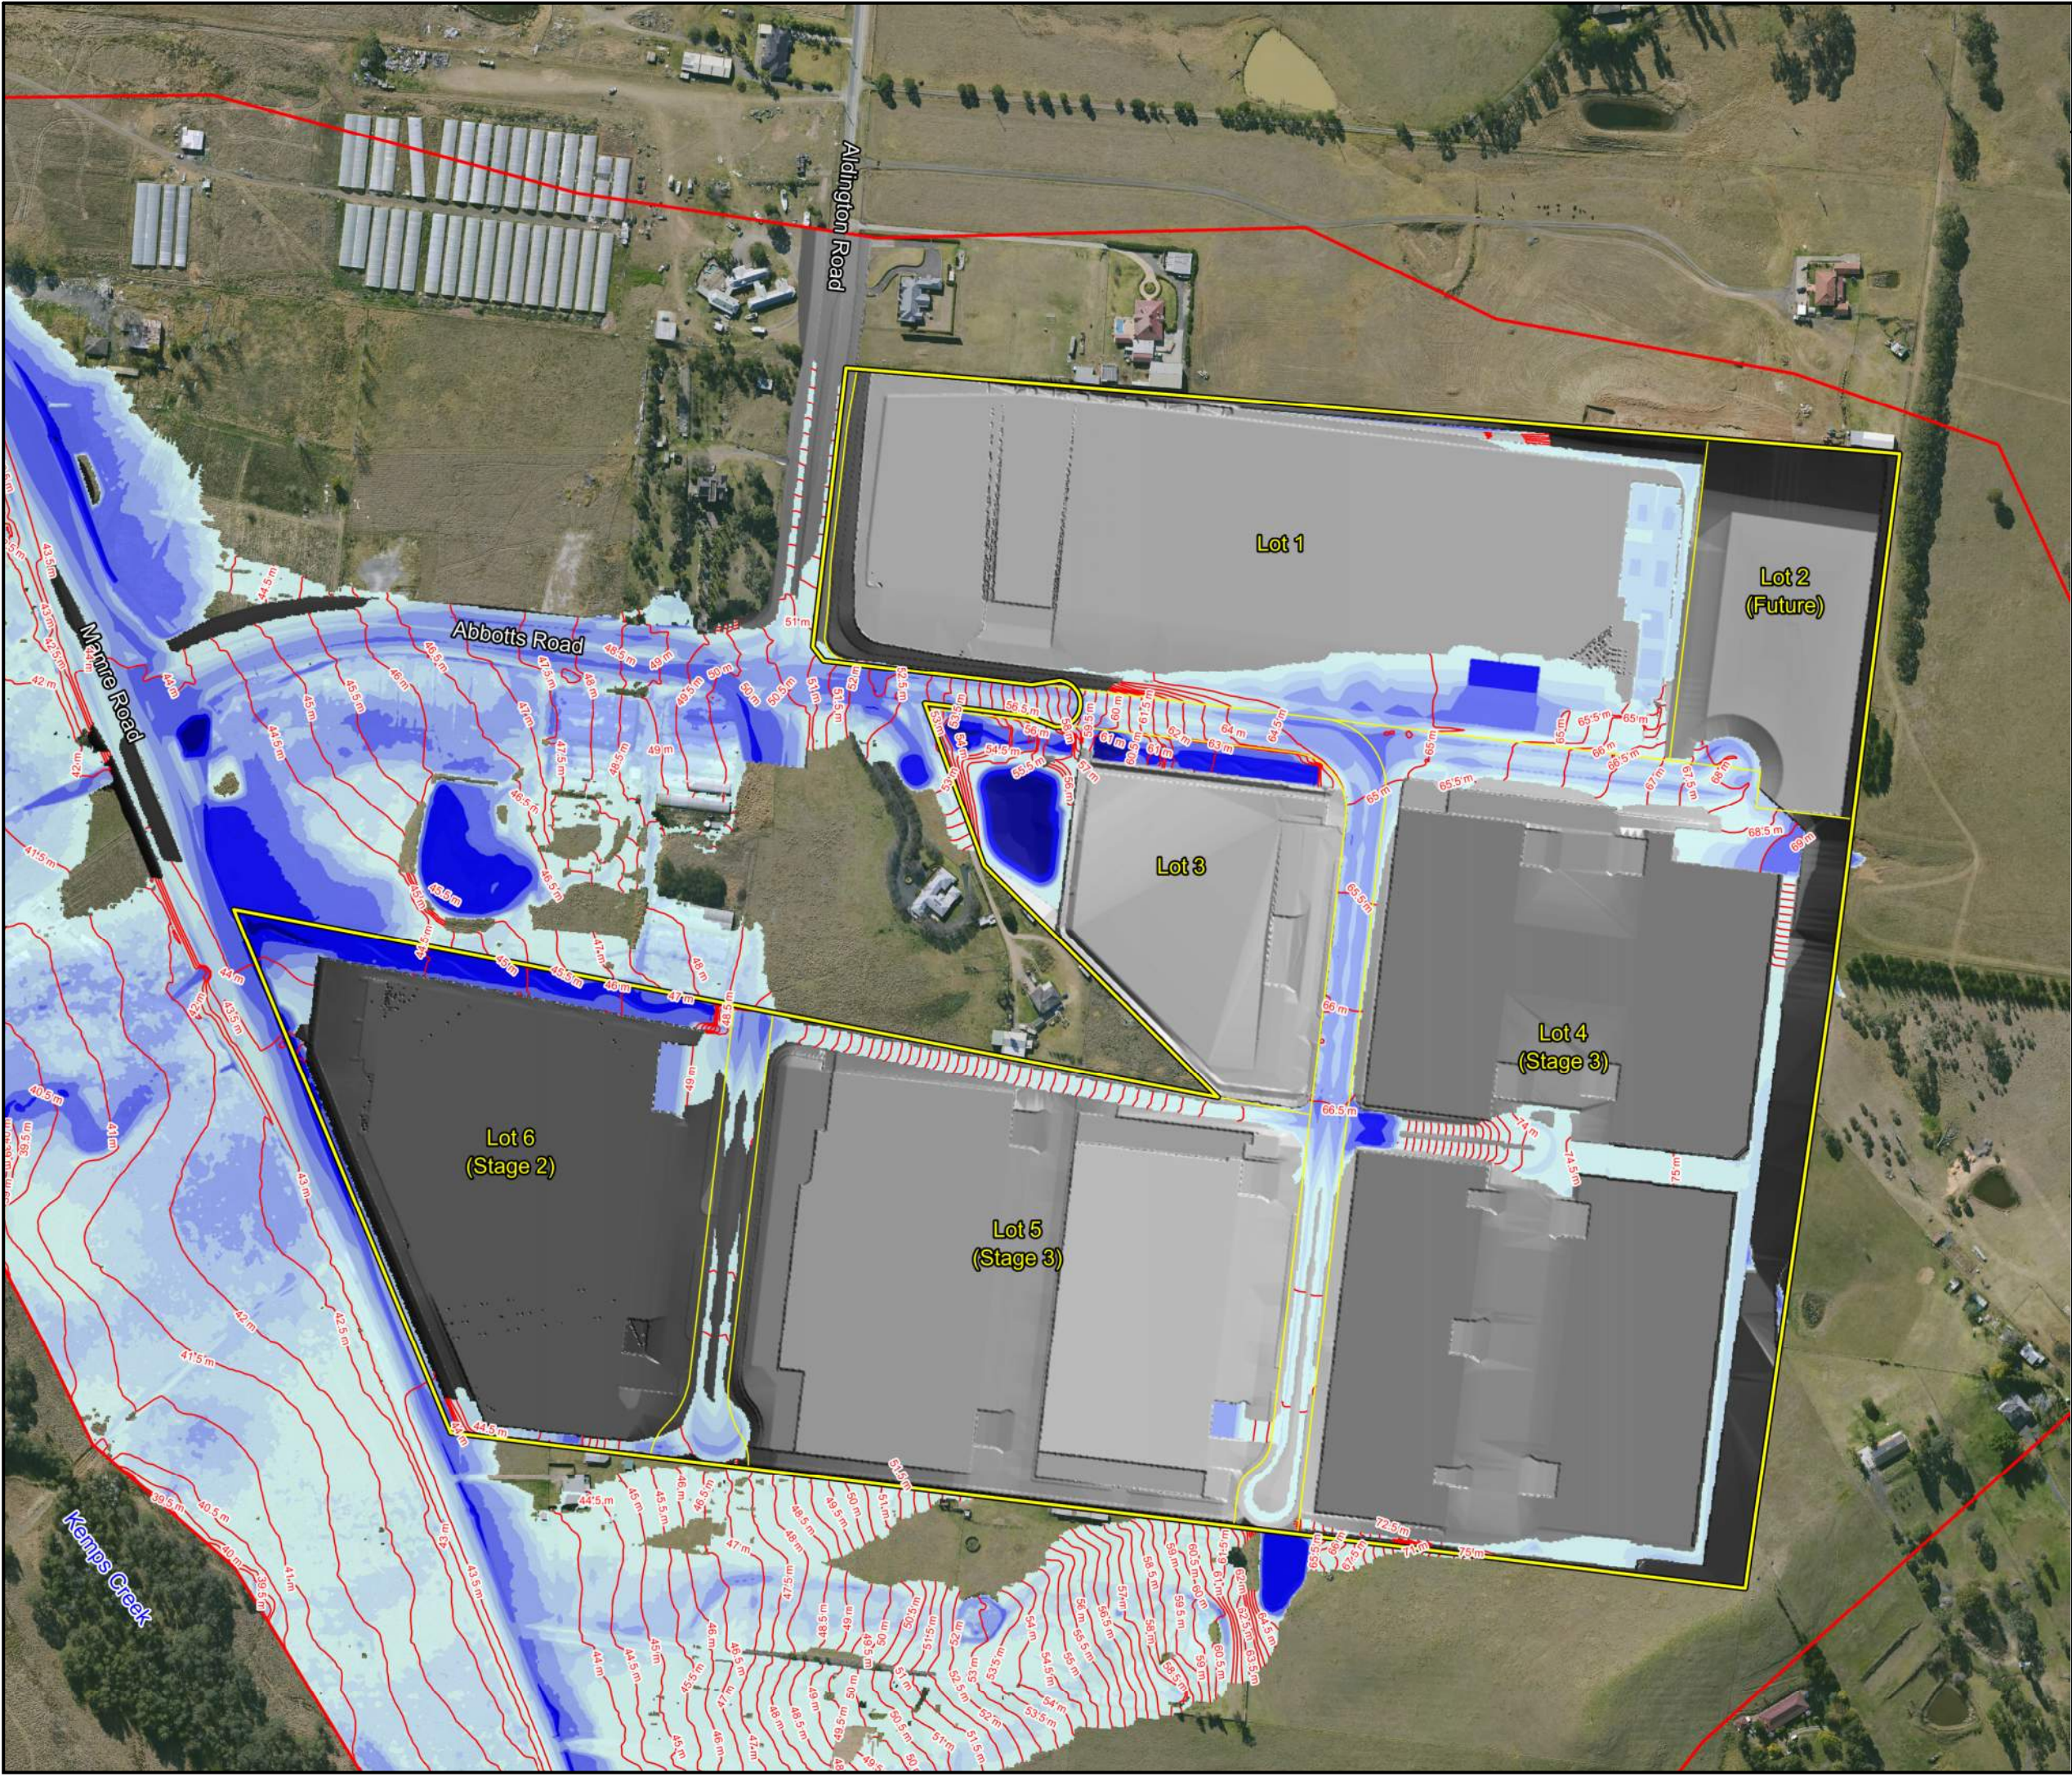


Date: 22/01/2025 Issue: A








LEGEND


FLOOD DEPTH (m)


	0.0 to 0.1
	0.1 to 0.2
	0.2 to 0.3
	0.3 to 0.5
	0.5 to 1.0
	1.0 to 2.0
	2.0 +


 0.5 m Flood Contours

 Site Boundary

 Westlink Lot Boundaries

 Stage 2, Lot 4 & Lot 5 DEM

 TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-10
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
PMF
Developed Conditions NoTW
Flood Depths and Levels


Date: 22/01/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-11_DES04-BASE02_1pc_DIFF_A.wor

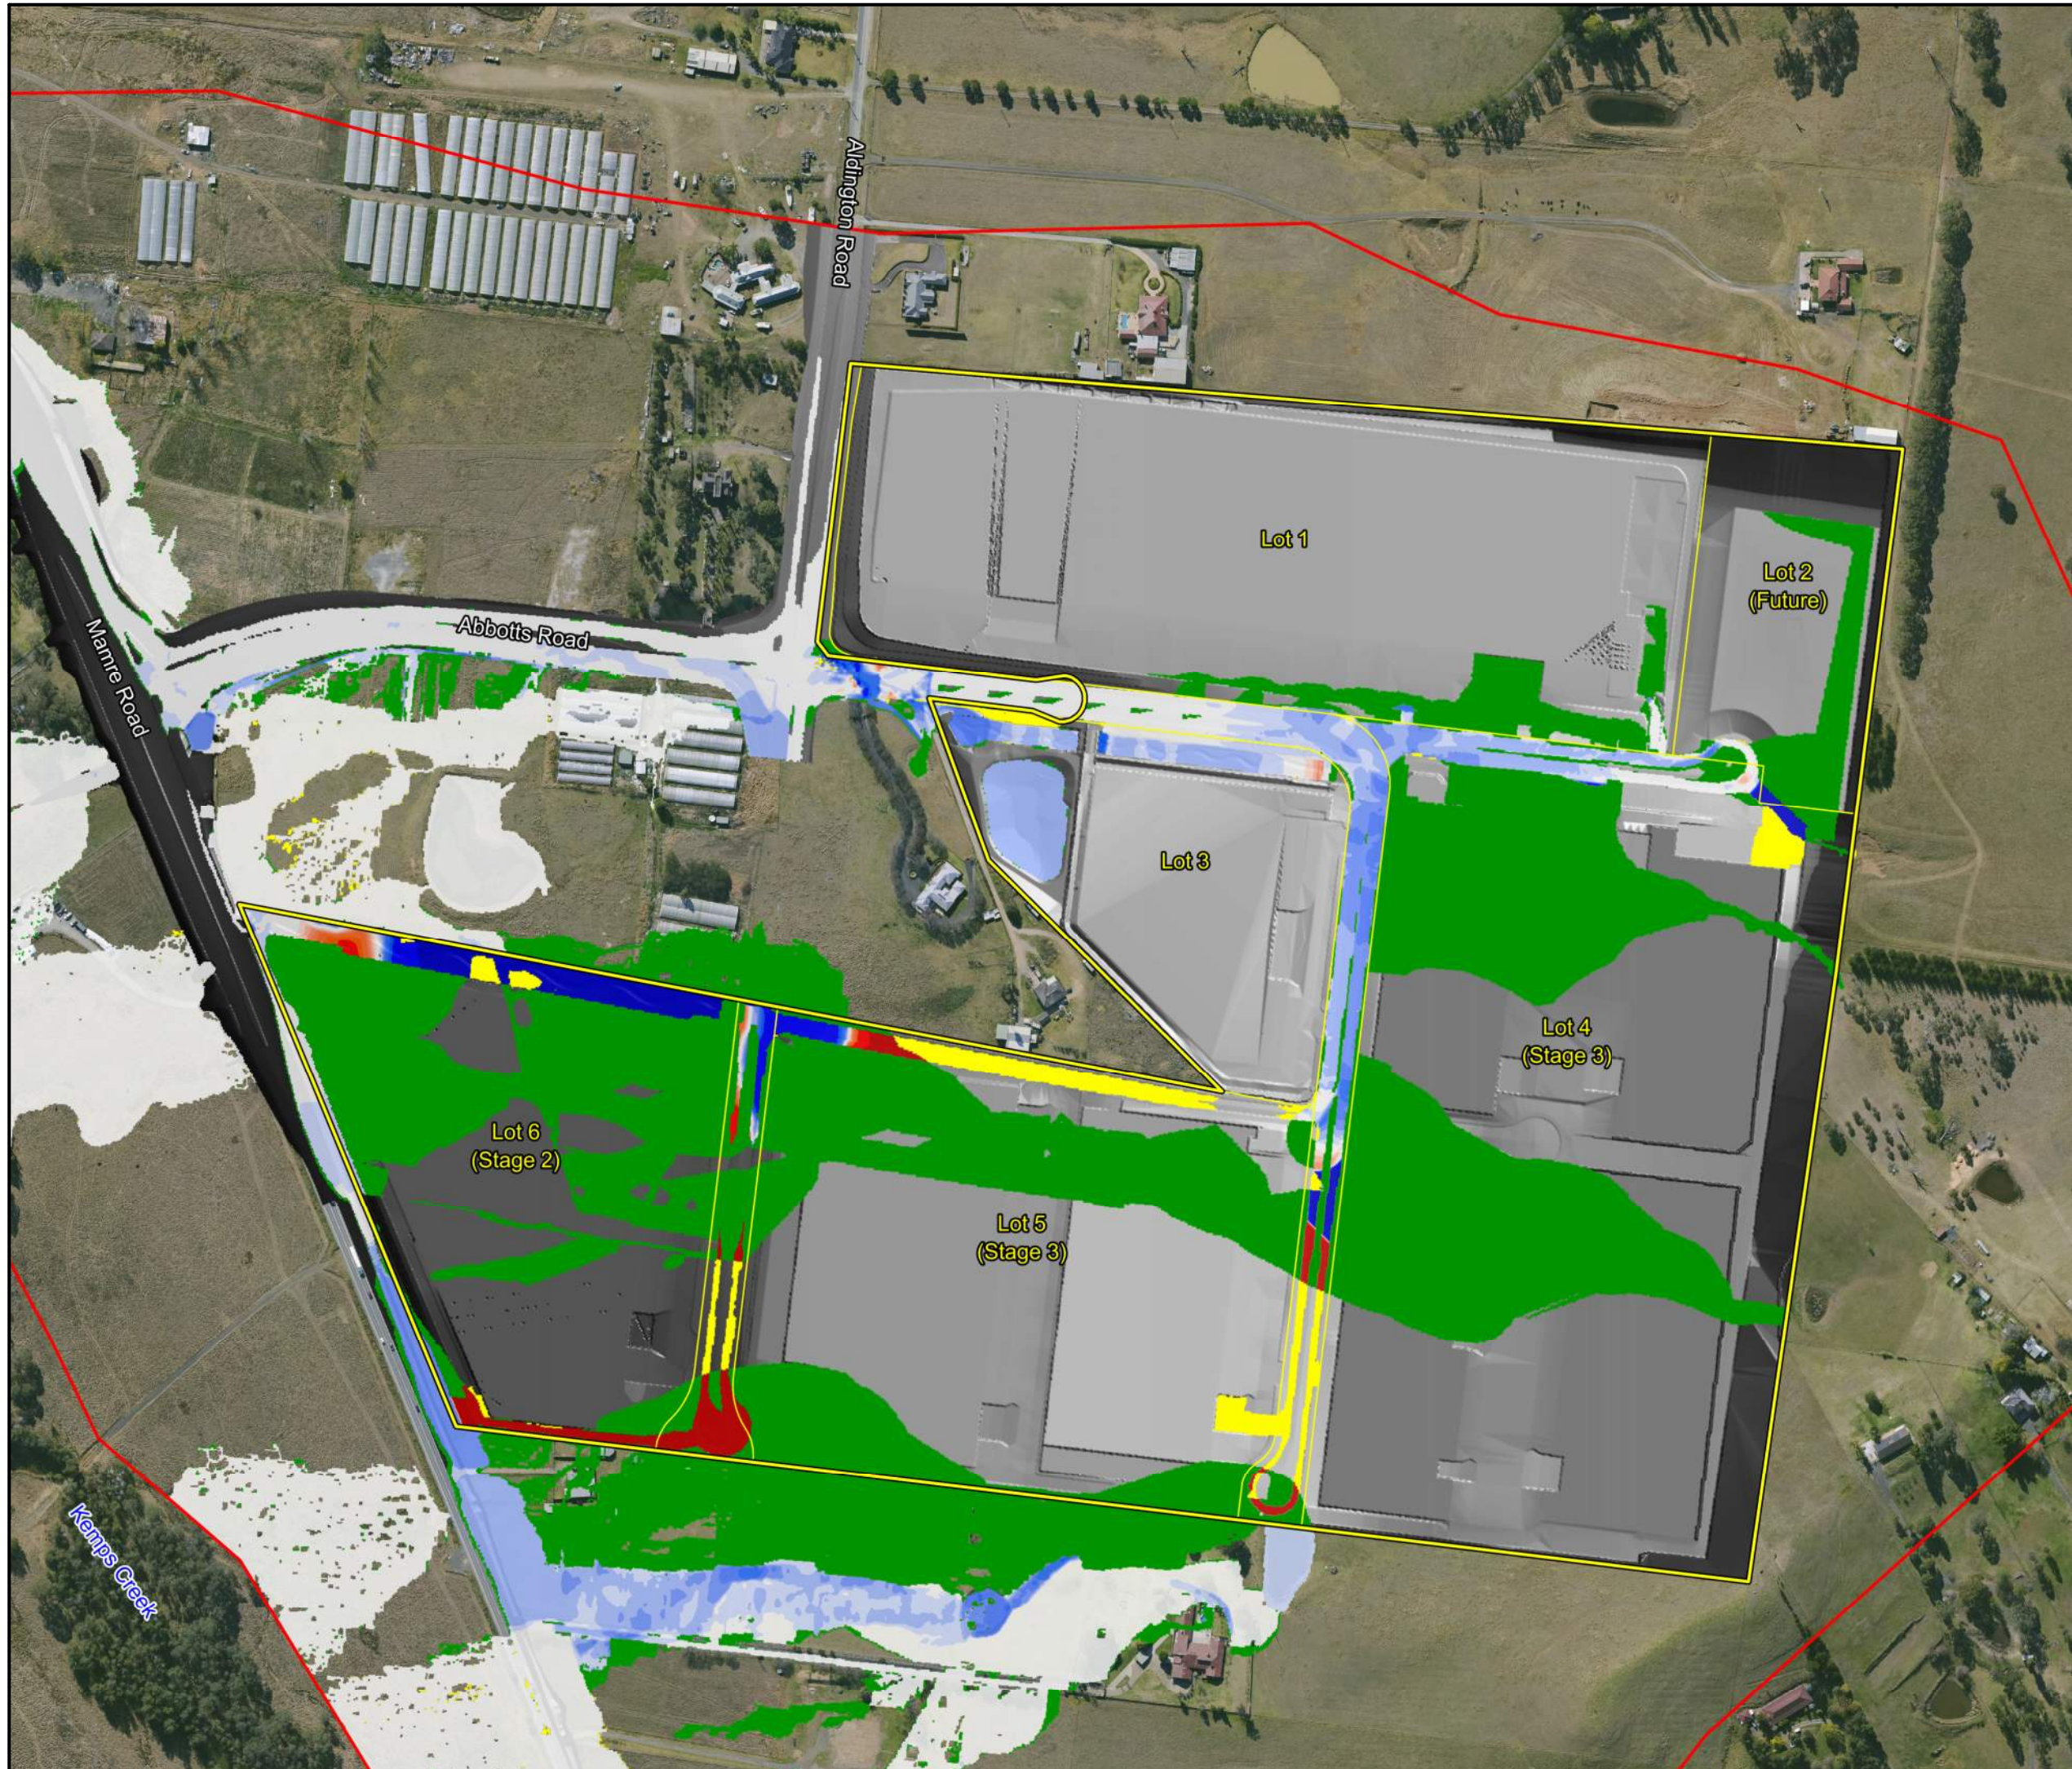


LEGEND

FLOOD DIFFERENCE (m)

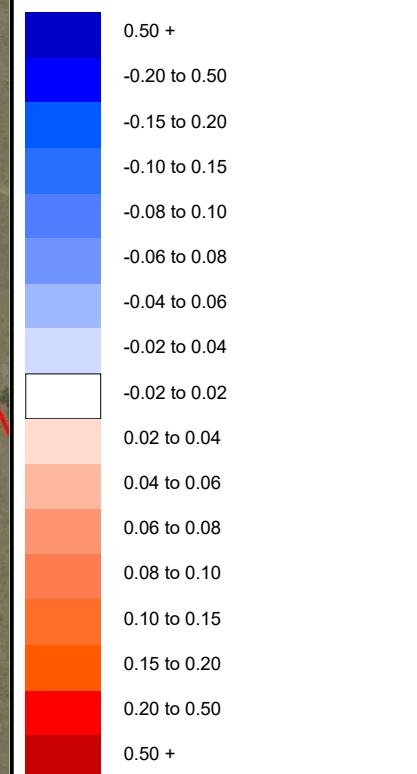

- Areas that were flood affected and are now flood free in modelled event
- Areas that were flood free and are now flood affected in modelled event
- Site Boundary
- Westlink Lot Boundaries
- Stage 2, Lot 4 & Lot 5 DEM
- TUFLOW Model Boundary



Projection: GDA 2020 MGA Zone 56

Figure 5-11


Westlink Stage 2, Lot 4 & Lot 5 Flood Impact and Risk

1% AEP
Developed minus Base Conditions
Flood Level Difference

Date: 22/01/2025





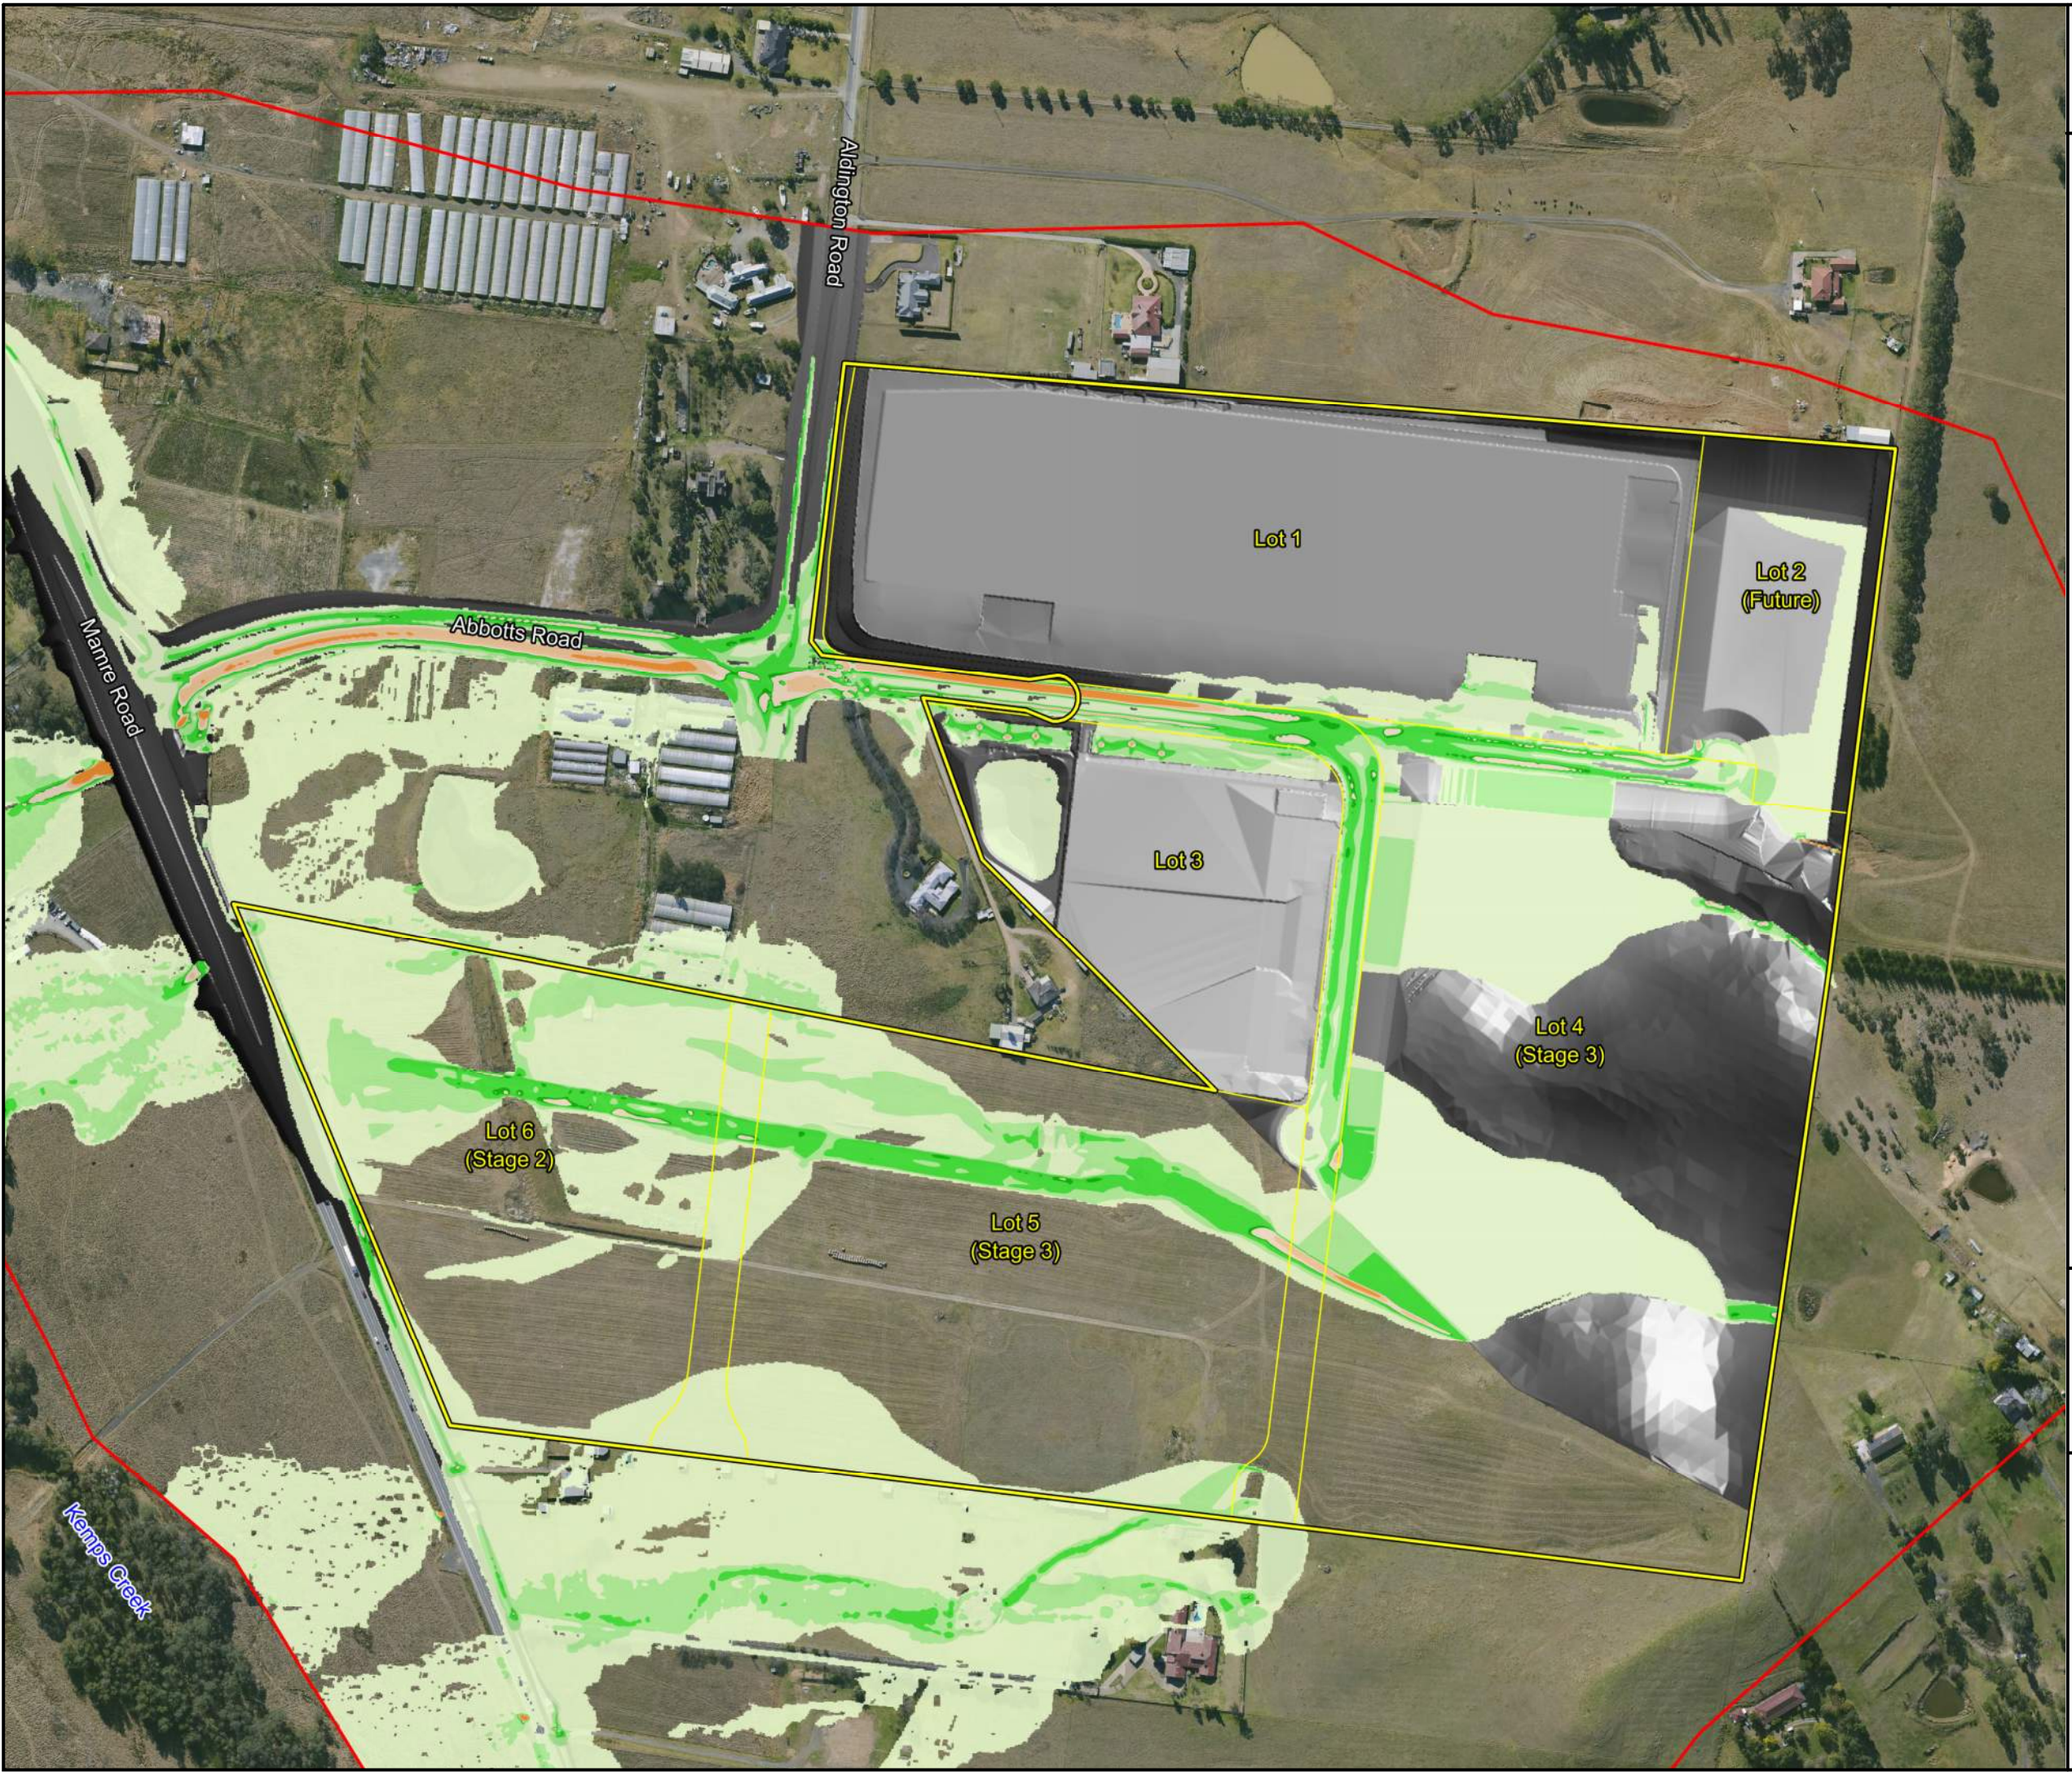


Issue: A


Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-12_BASE02_1pc_VEL_A.wor





LEGEND


VELOCITY (m/s)


	< 0.5
	0.5 to 1.0
	1.0 to 1.5
	1.5 to 1.6
	1.6 to 2.0
	2.0 to 2.5
	2.5 +

 Site Boundary

 Westlink Lot Boundaries

 Interim Stage 1 (Base Conditions) DEM


 TUFLOW Model Boundary


 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-12
Westlink Stage 2, Lot 4 & Lot 5
Flood Impact and Risk
1% AEP
Base Conditions NoTW
Flood Velocity



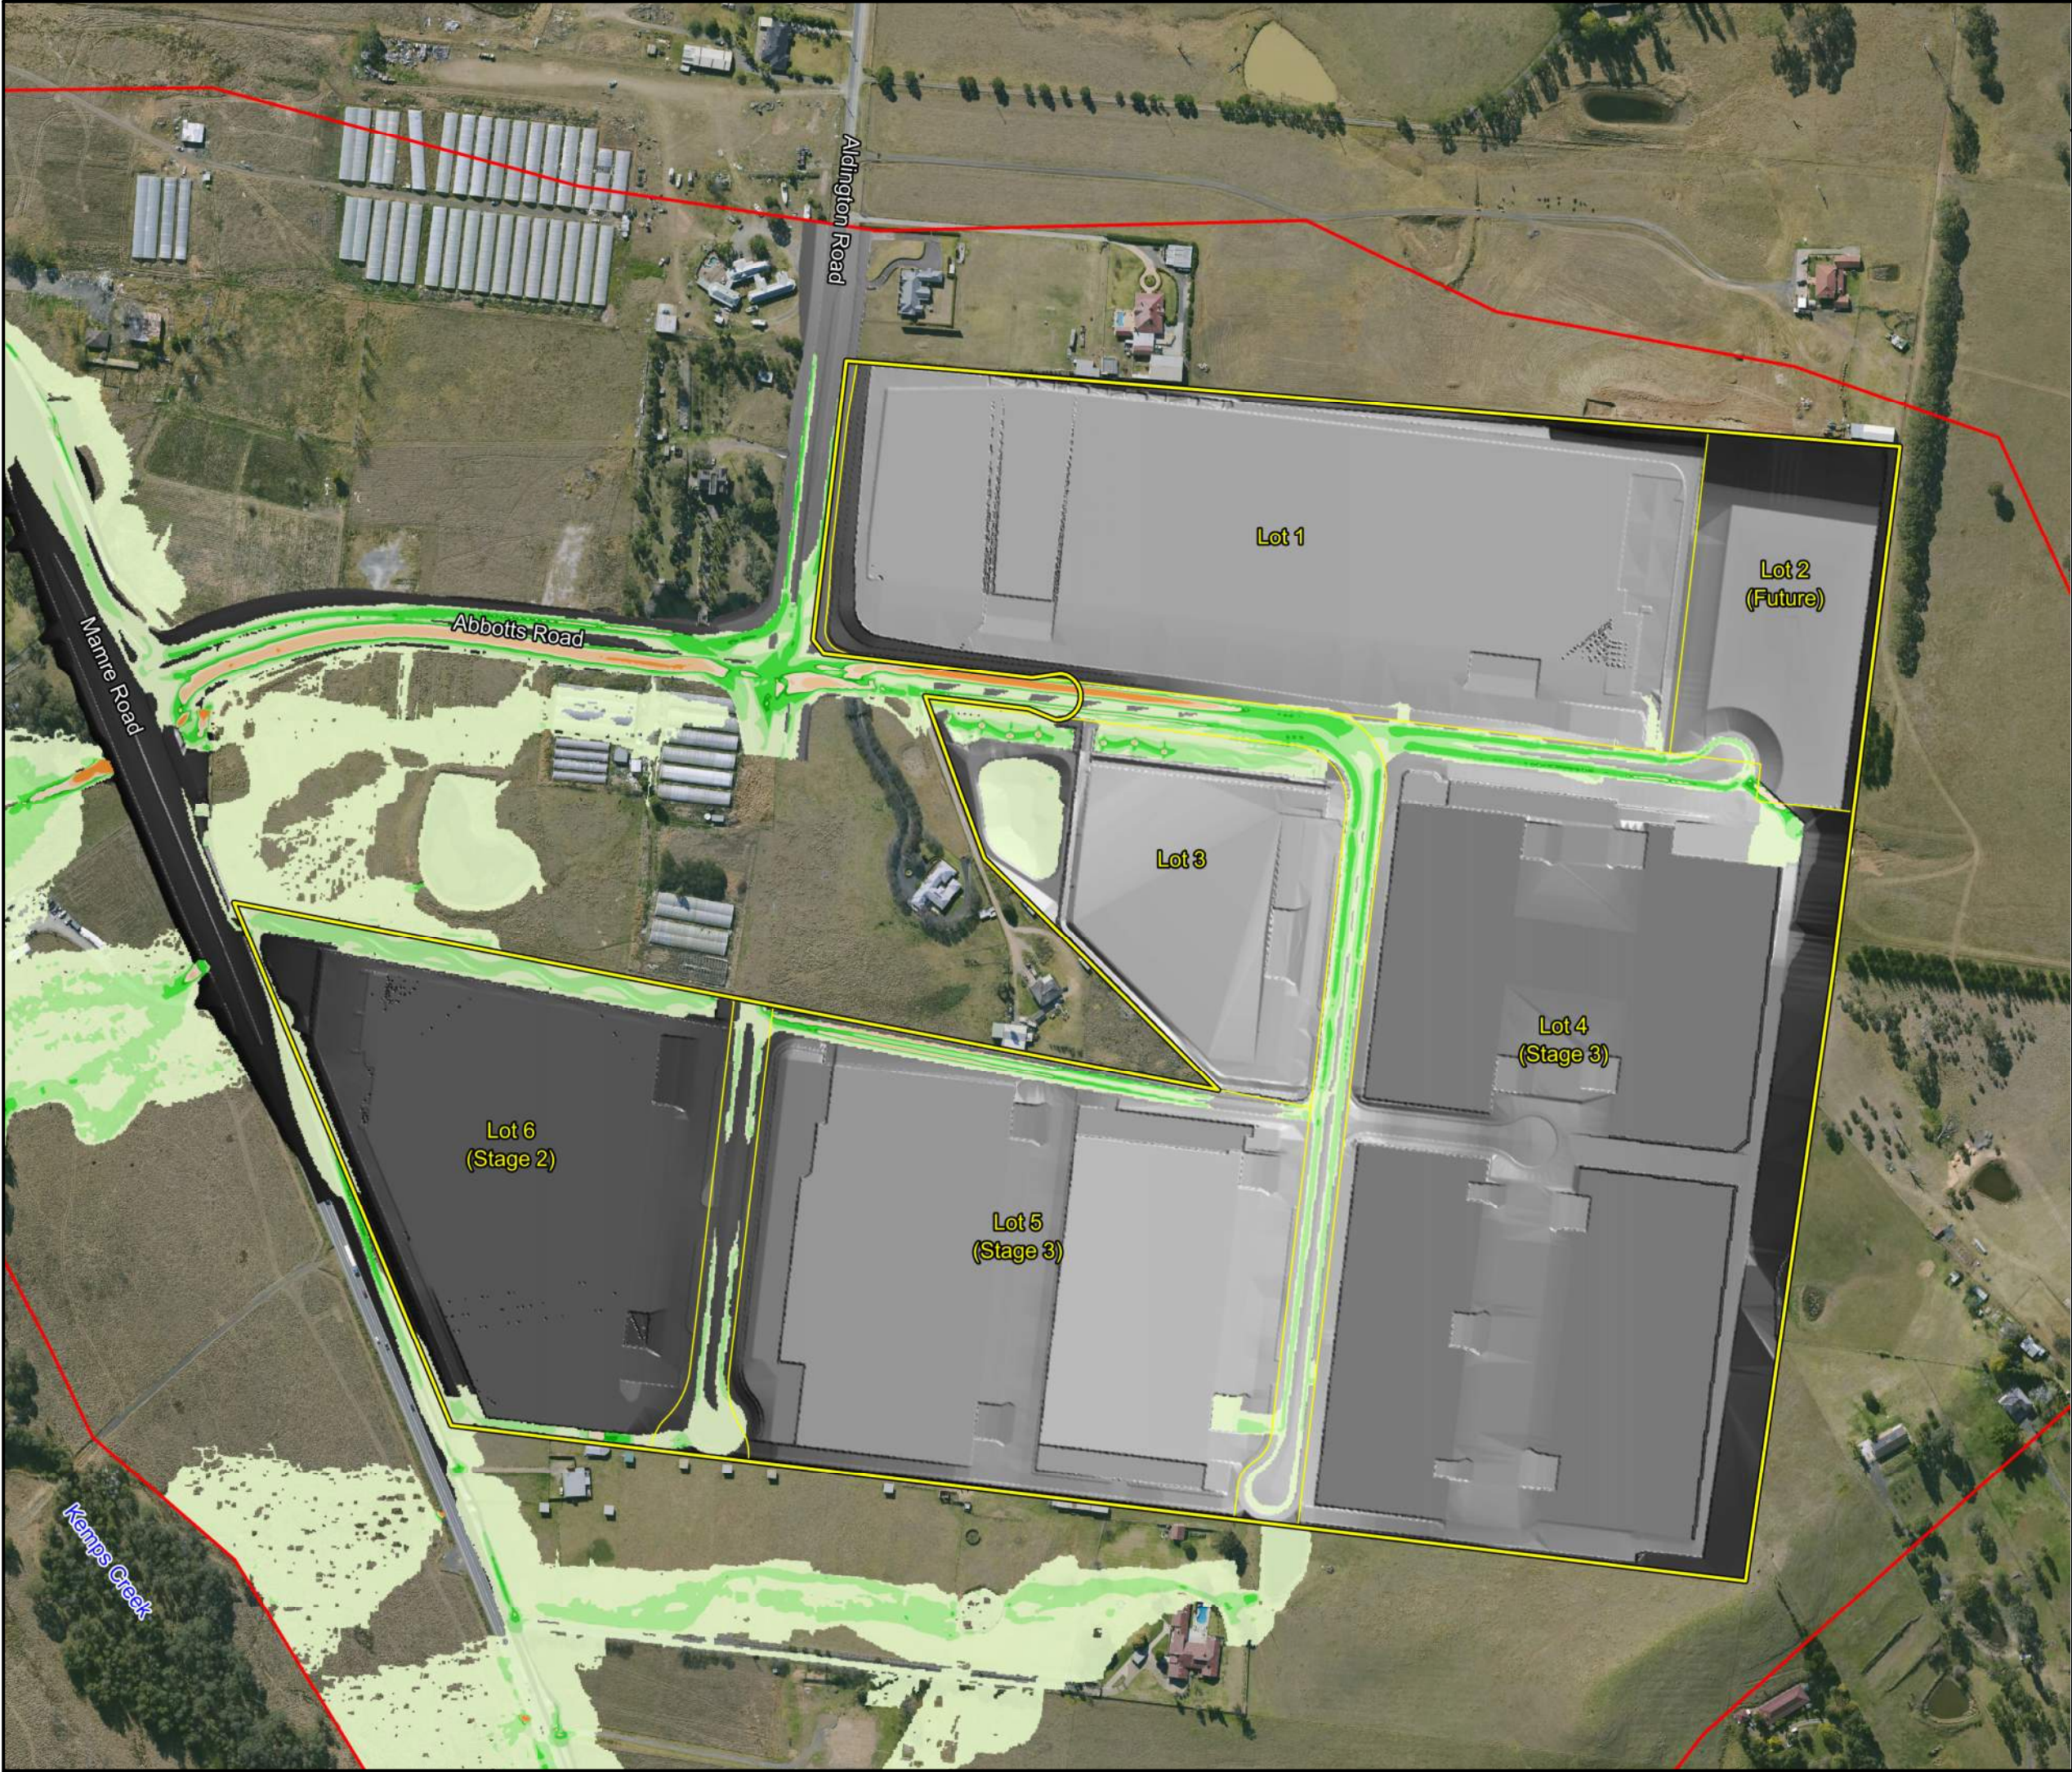




Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-13_DES04_1pc_VEL_A.wor










LEGEND

VELOCITY (m/s)

	< 0.5
	0.5 to 1.0
	1.0 to 1.5
	1.5 to 1.6
	1.6 to 2.0
	2.0 to 2.5
	2.5 +

	Site Boundary
	Westlink Lot Boundaries
	Stage 2, Lot 4 & Lot 5 DEM
	TUFLOW Model Boundary



N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-13

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk

1% AEP


Developed Conditions NoTW


Flood Velocity

Date: 22/01/2025

Issue: A

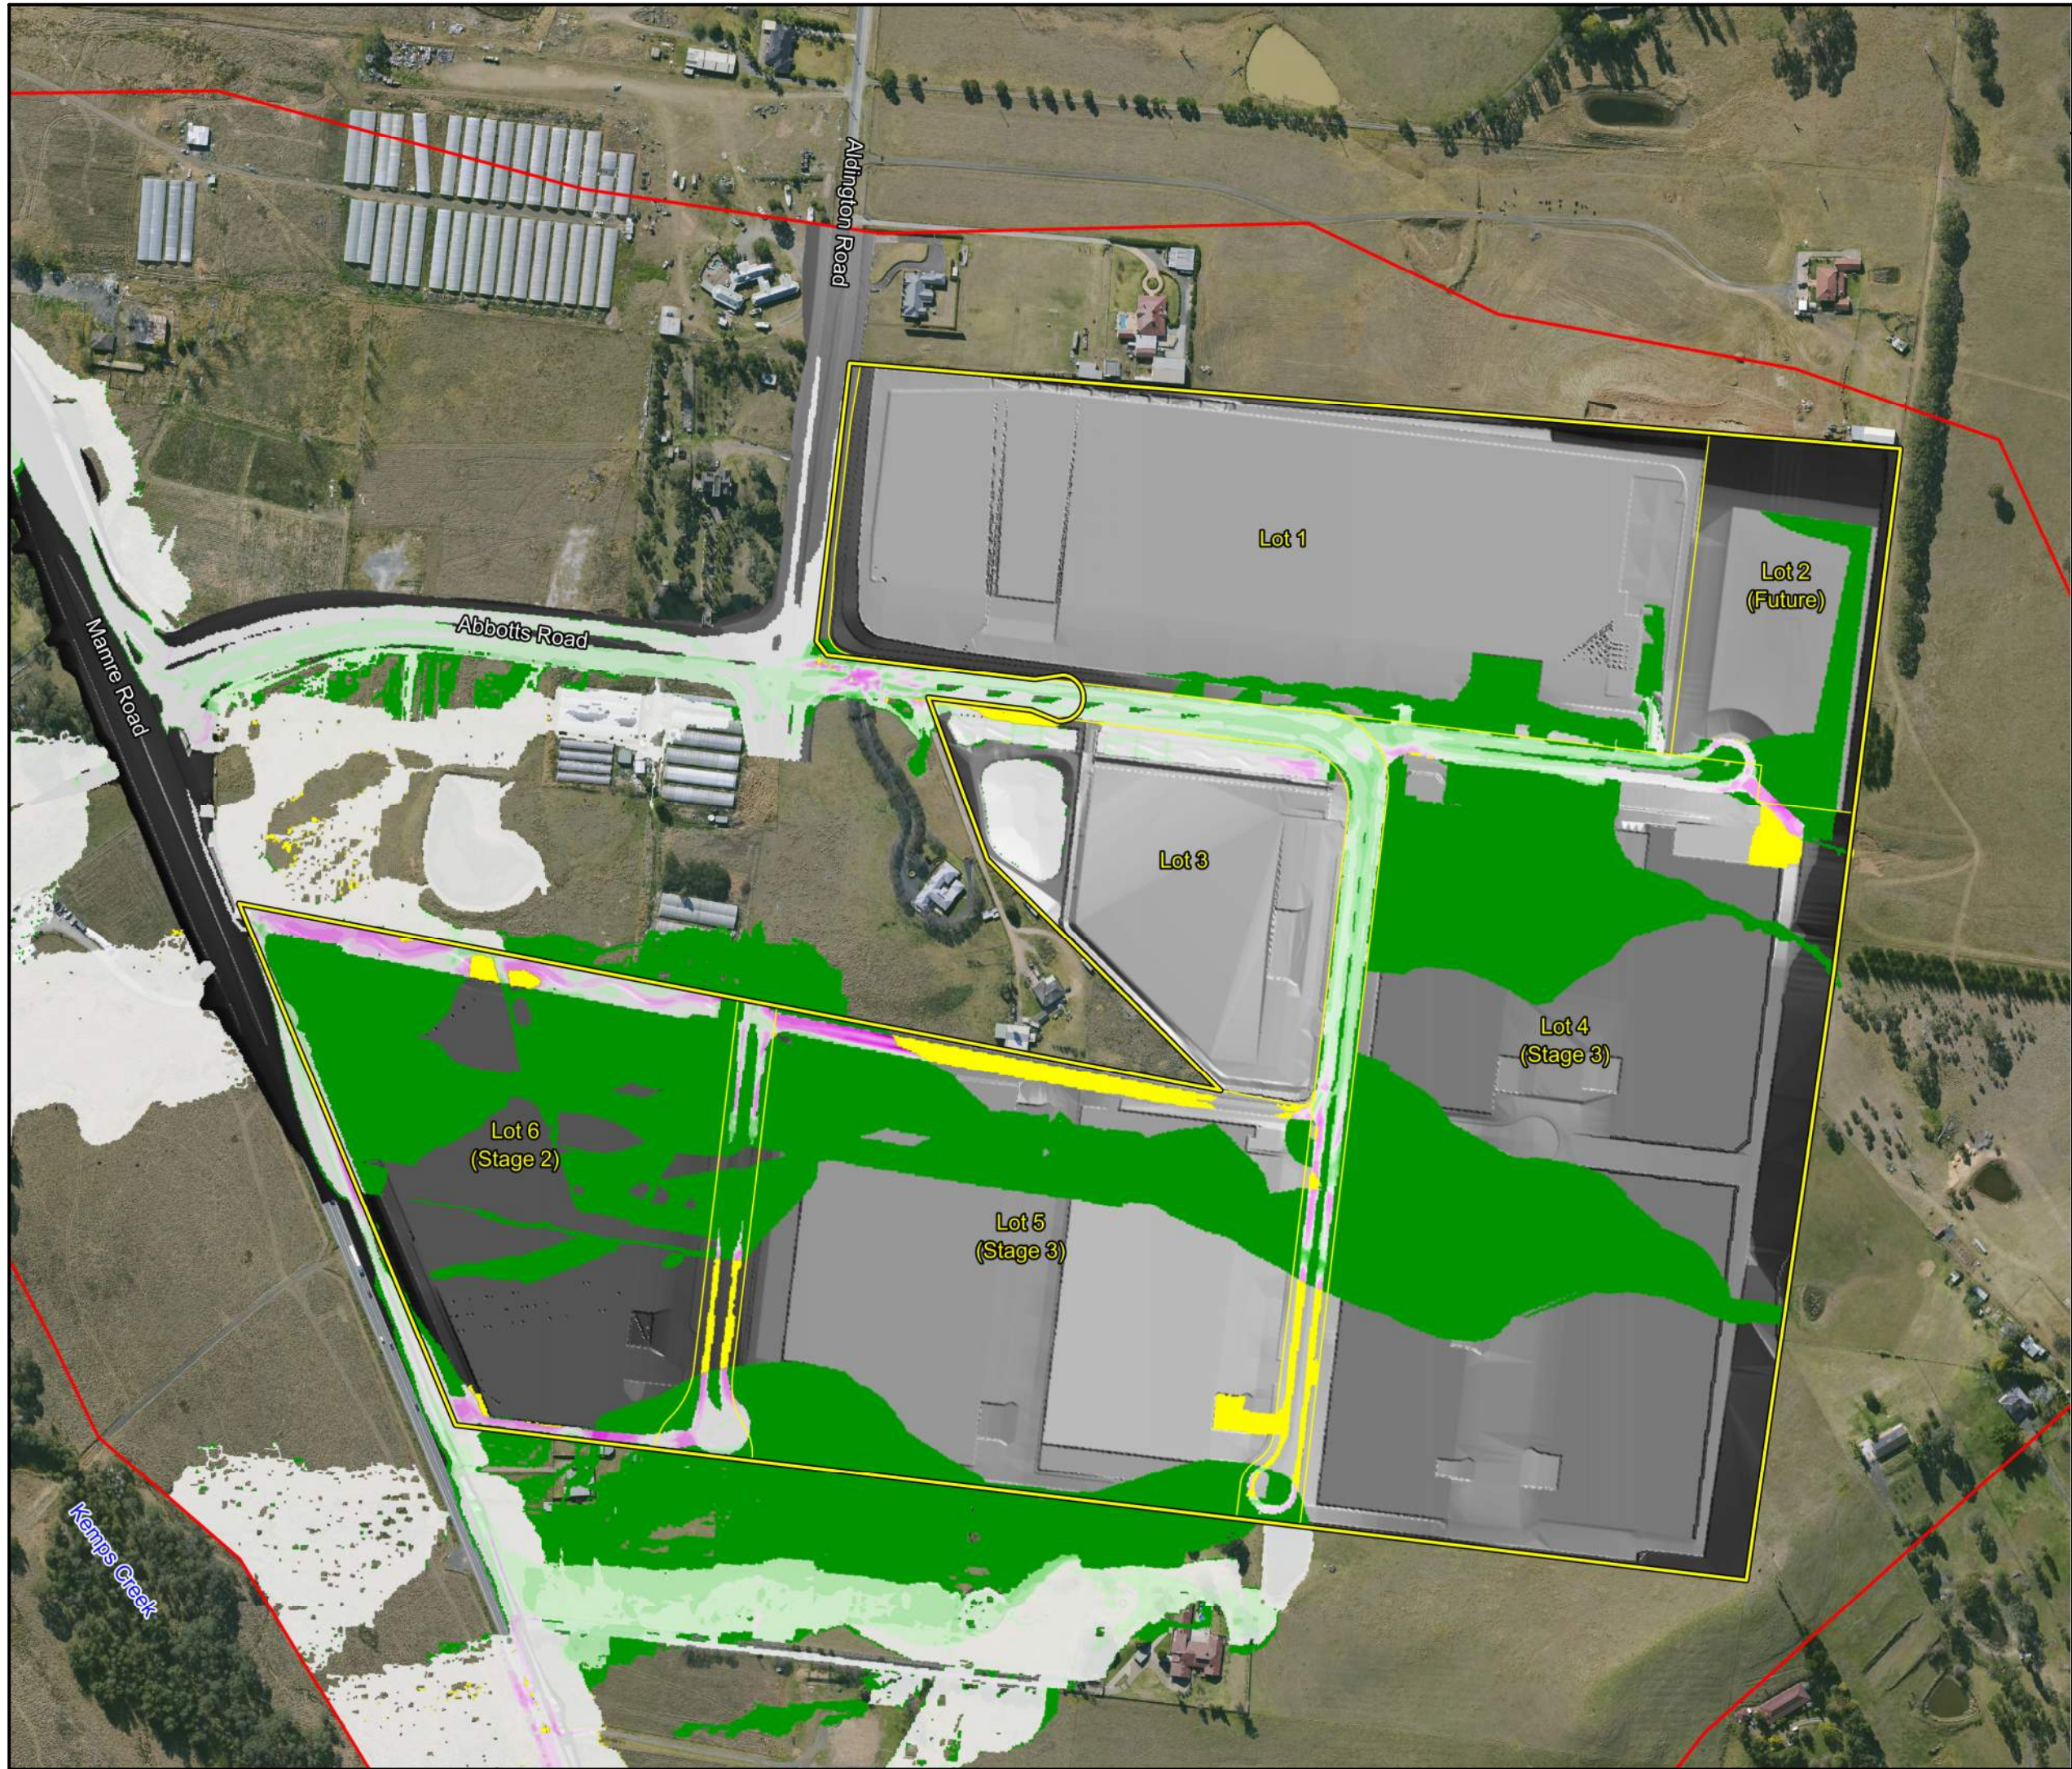












Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-14_DES04-BASE02_1pc_VELDIFF_A.wor








LEGEND


VELOCITY DIFFERENCE (m)


	-2.0 +
	-1.5 to 2.0 +
	-1.0 to 1.5
	-0.5 to 1.0
	-0.25 to 0.5
	-0.10 to 0.25
	-0.1 to 0.1
	0.10 to 0.25
	0.25 to 0.5
	0.5 to 1.0
	1.0 to 1.5
	1.5 to 2.0
	2.0 +


 Areas that were flood affected and are now flood free in modelled event


 Areas that were flood free and are now flood affected in modelled event

 Site Boundary

 Westlink Lot Boundaries

 Stage 2, Lot 4 & Lot 5 DEM

 TUFLOW Model Boundary

 0 160
metres
Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-14


Westlink Stage 2, Lot 4 & Lot 5


Flood Impact and Risk

1% AEP
Developed minus Base Conditions
Flood Velocity Difference

Date: 22/01/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMap\infol\Figures\ST2 FIRA\110965-04_Fig5-15_BASE02_5pc_HAZ_A.wor

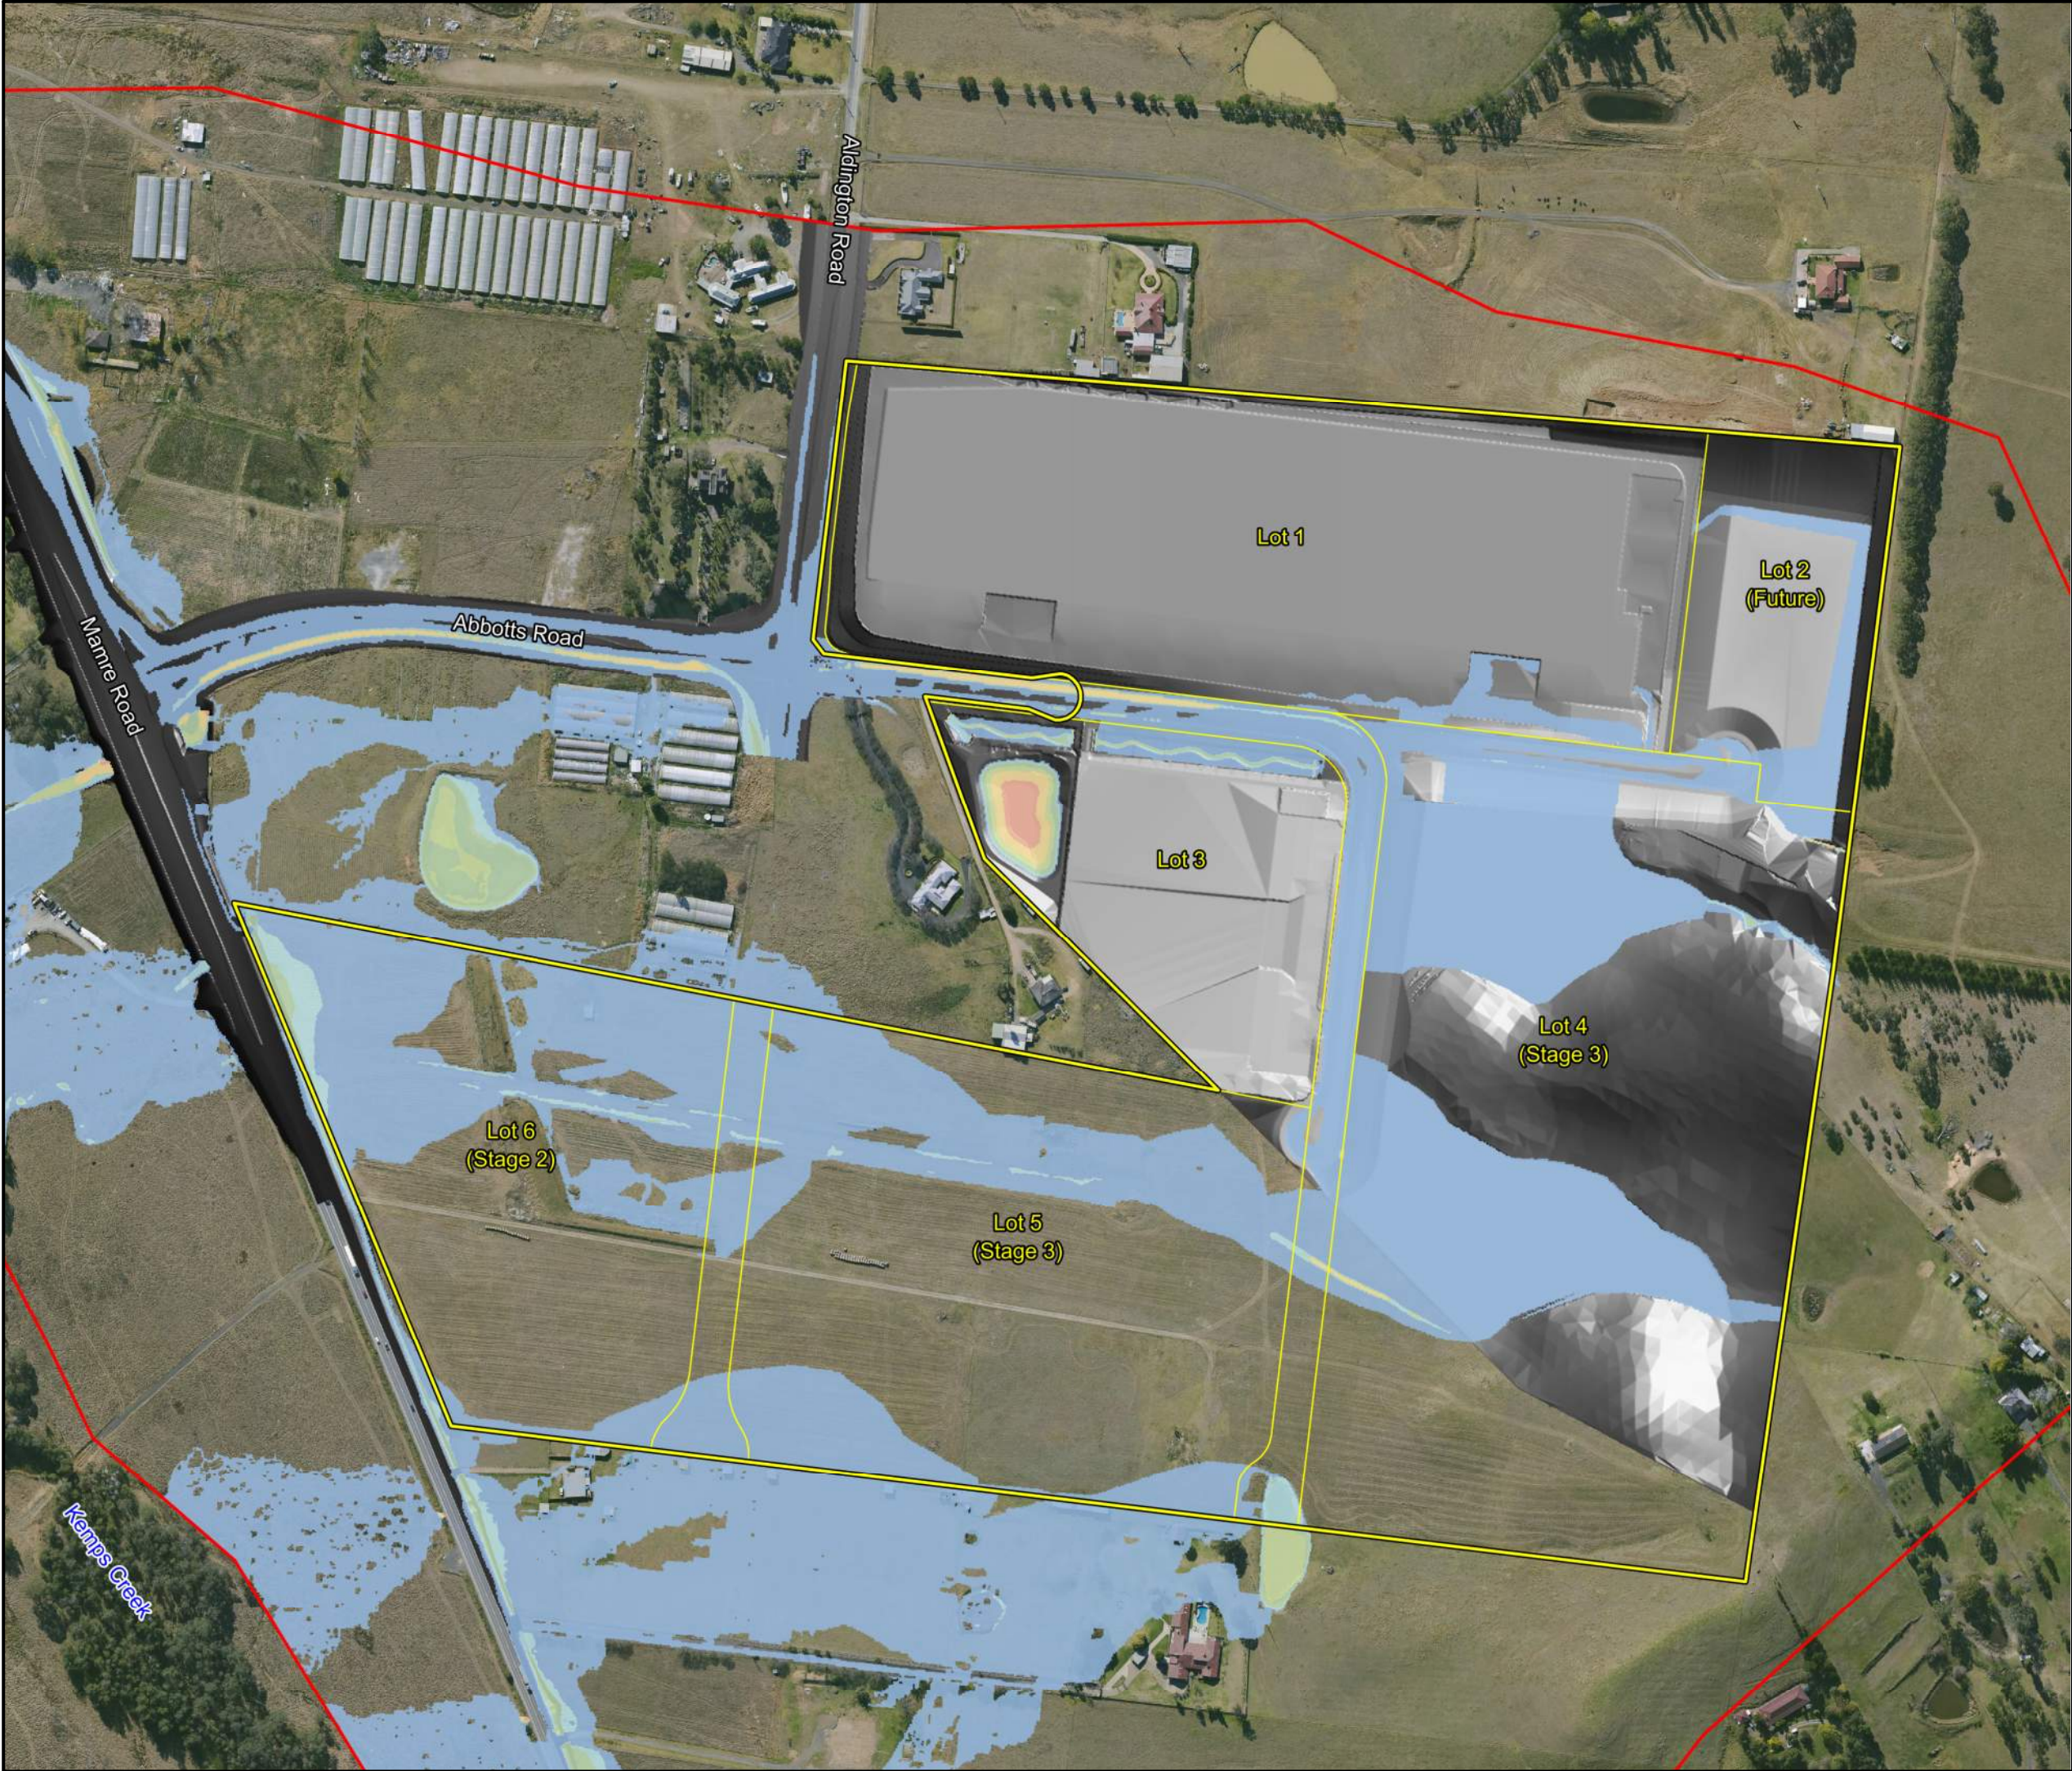



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Interim Stage 1 (Base Conditions) DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-15

Westlink Stage 2, Lot 4 & Lot 5


Flood Impact and Risk


5% AEP
Base Conditions NoTW
Flood Hazard

Date: 22/01/2025

Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-16_BASE02_1pc_HAZ_A.wor

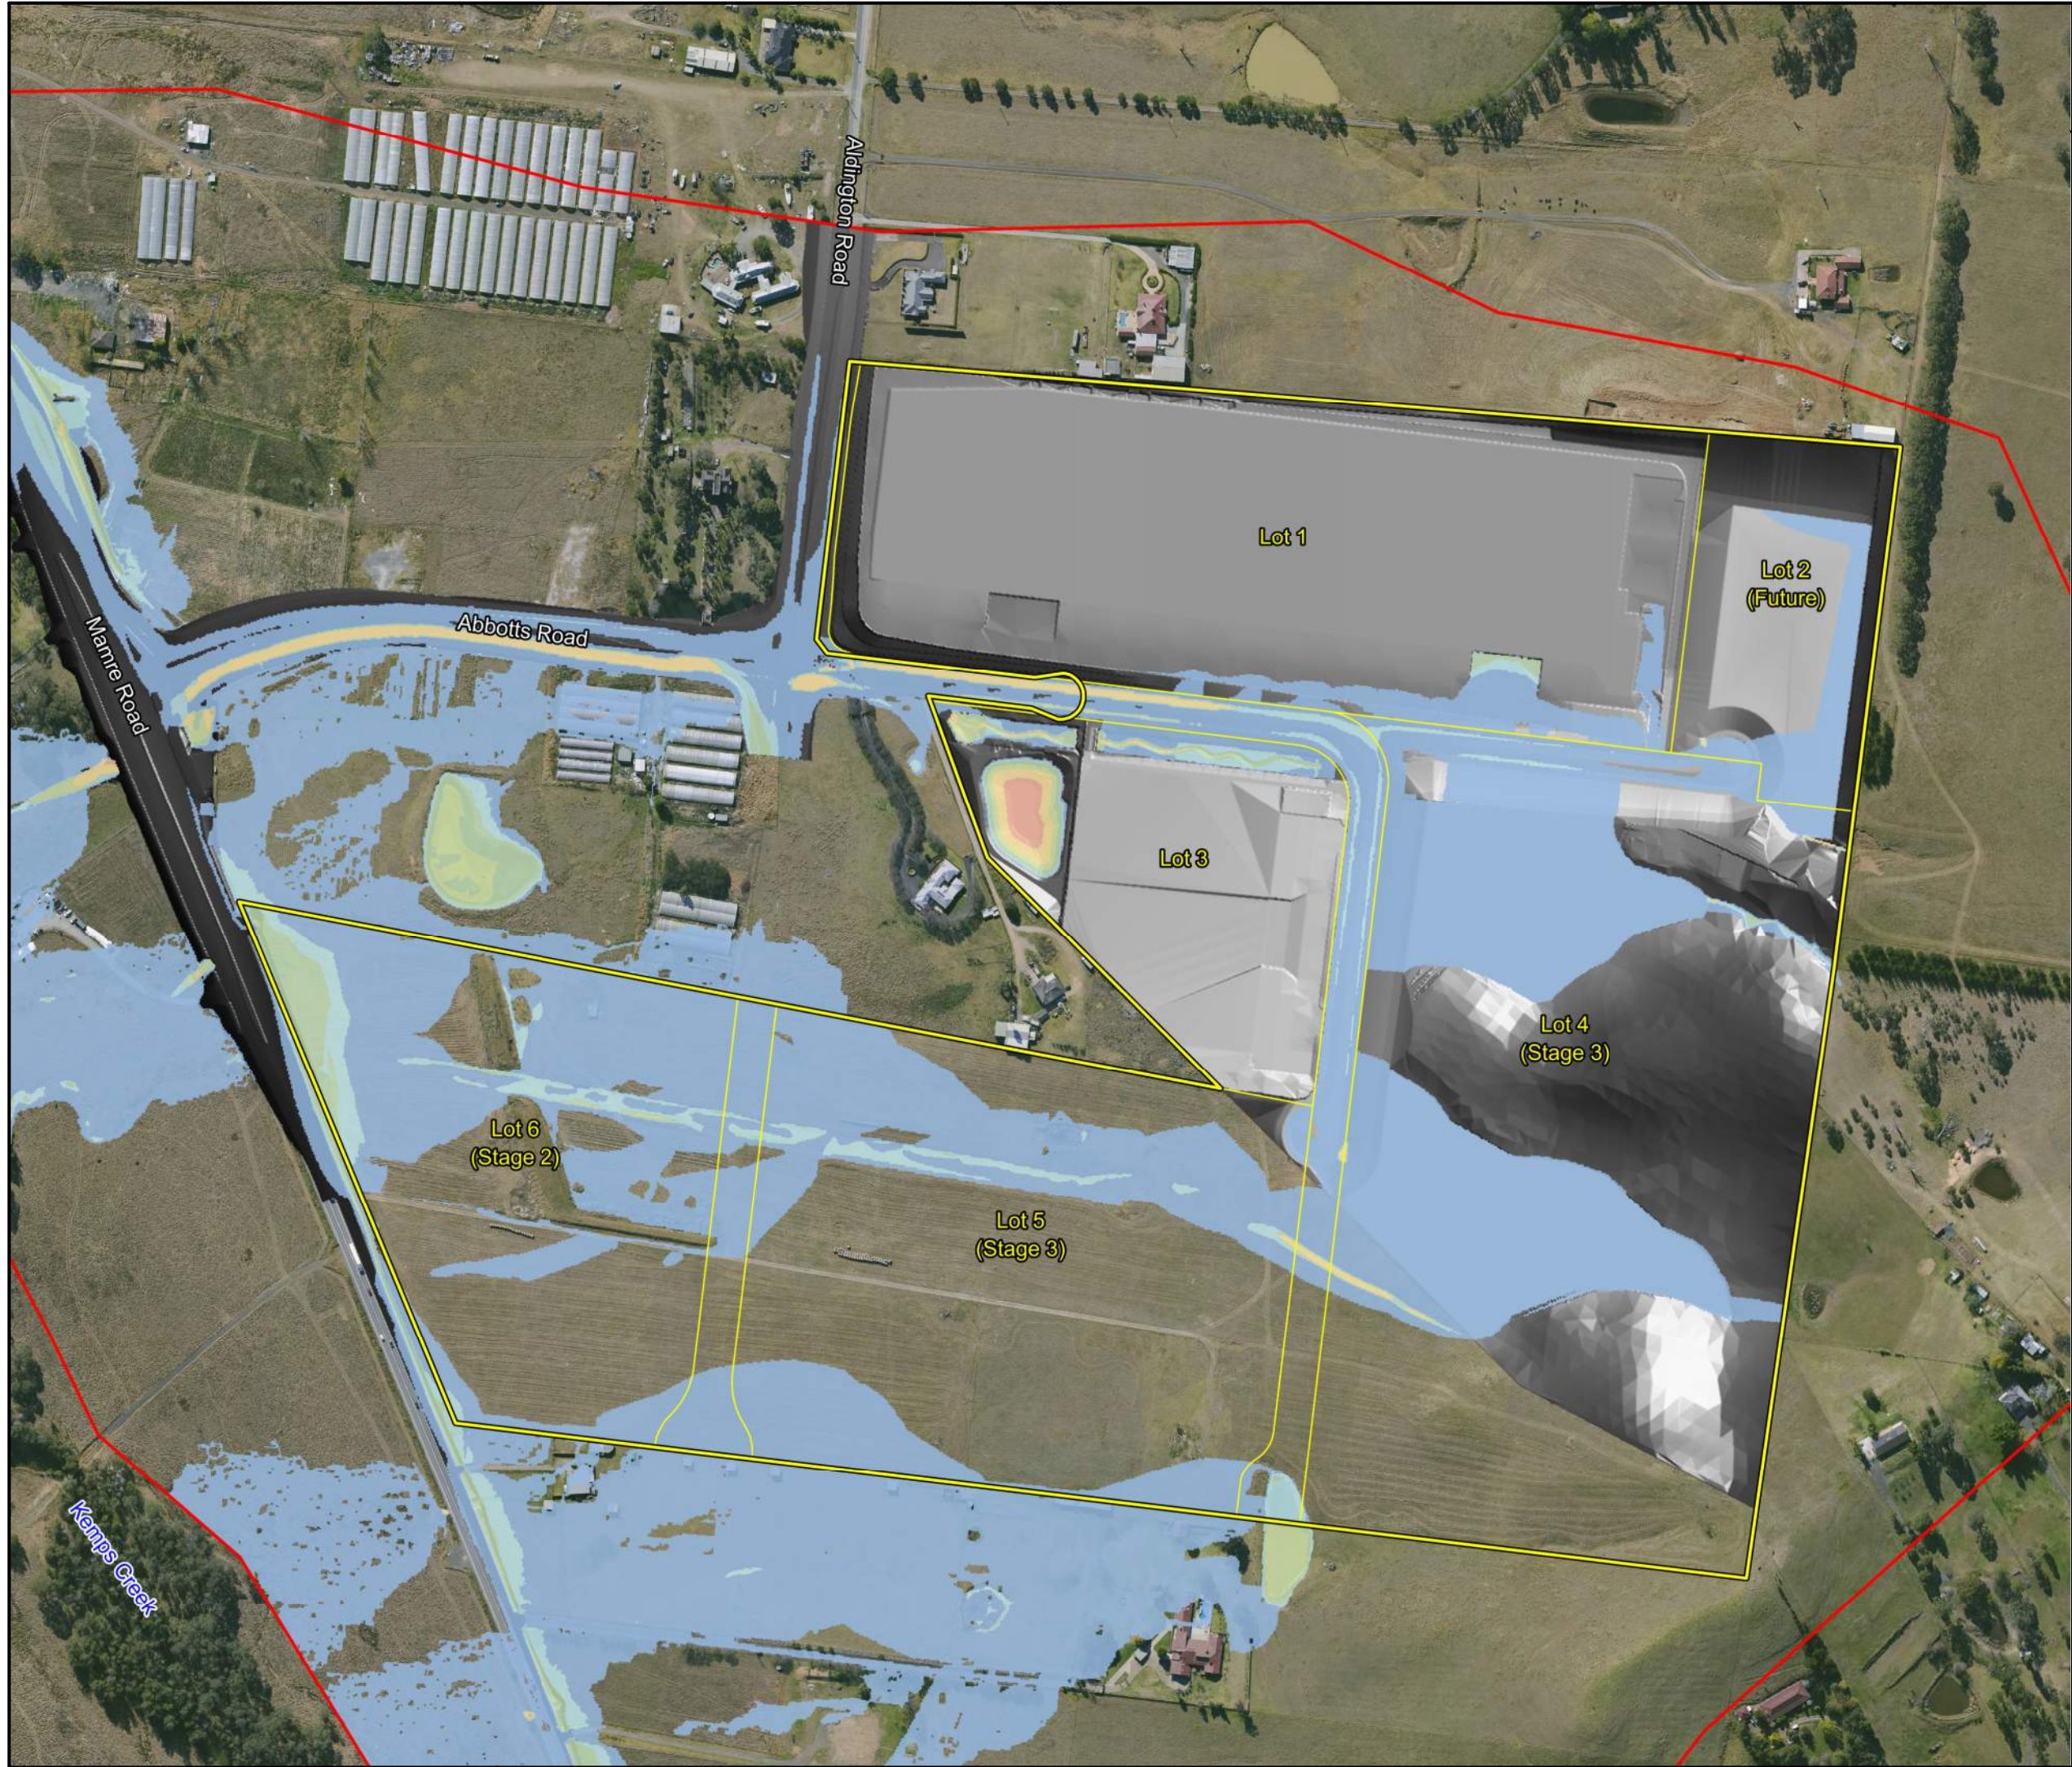



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Interim Stage 1 (Base Conditions) DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-16

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk

1% AEP


Base Conditions NoTW


Flood Hazard

Date: 22/01/2025

Issue: A

Filename: J:\110965 - Westlink\SWFMap\info\Figures\ST2 FIRA\110965-04_Fig5-17_BASE02_0p5pc_HAZ_A.wor

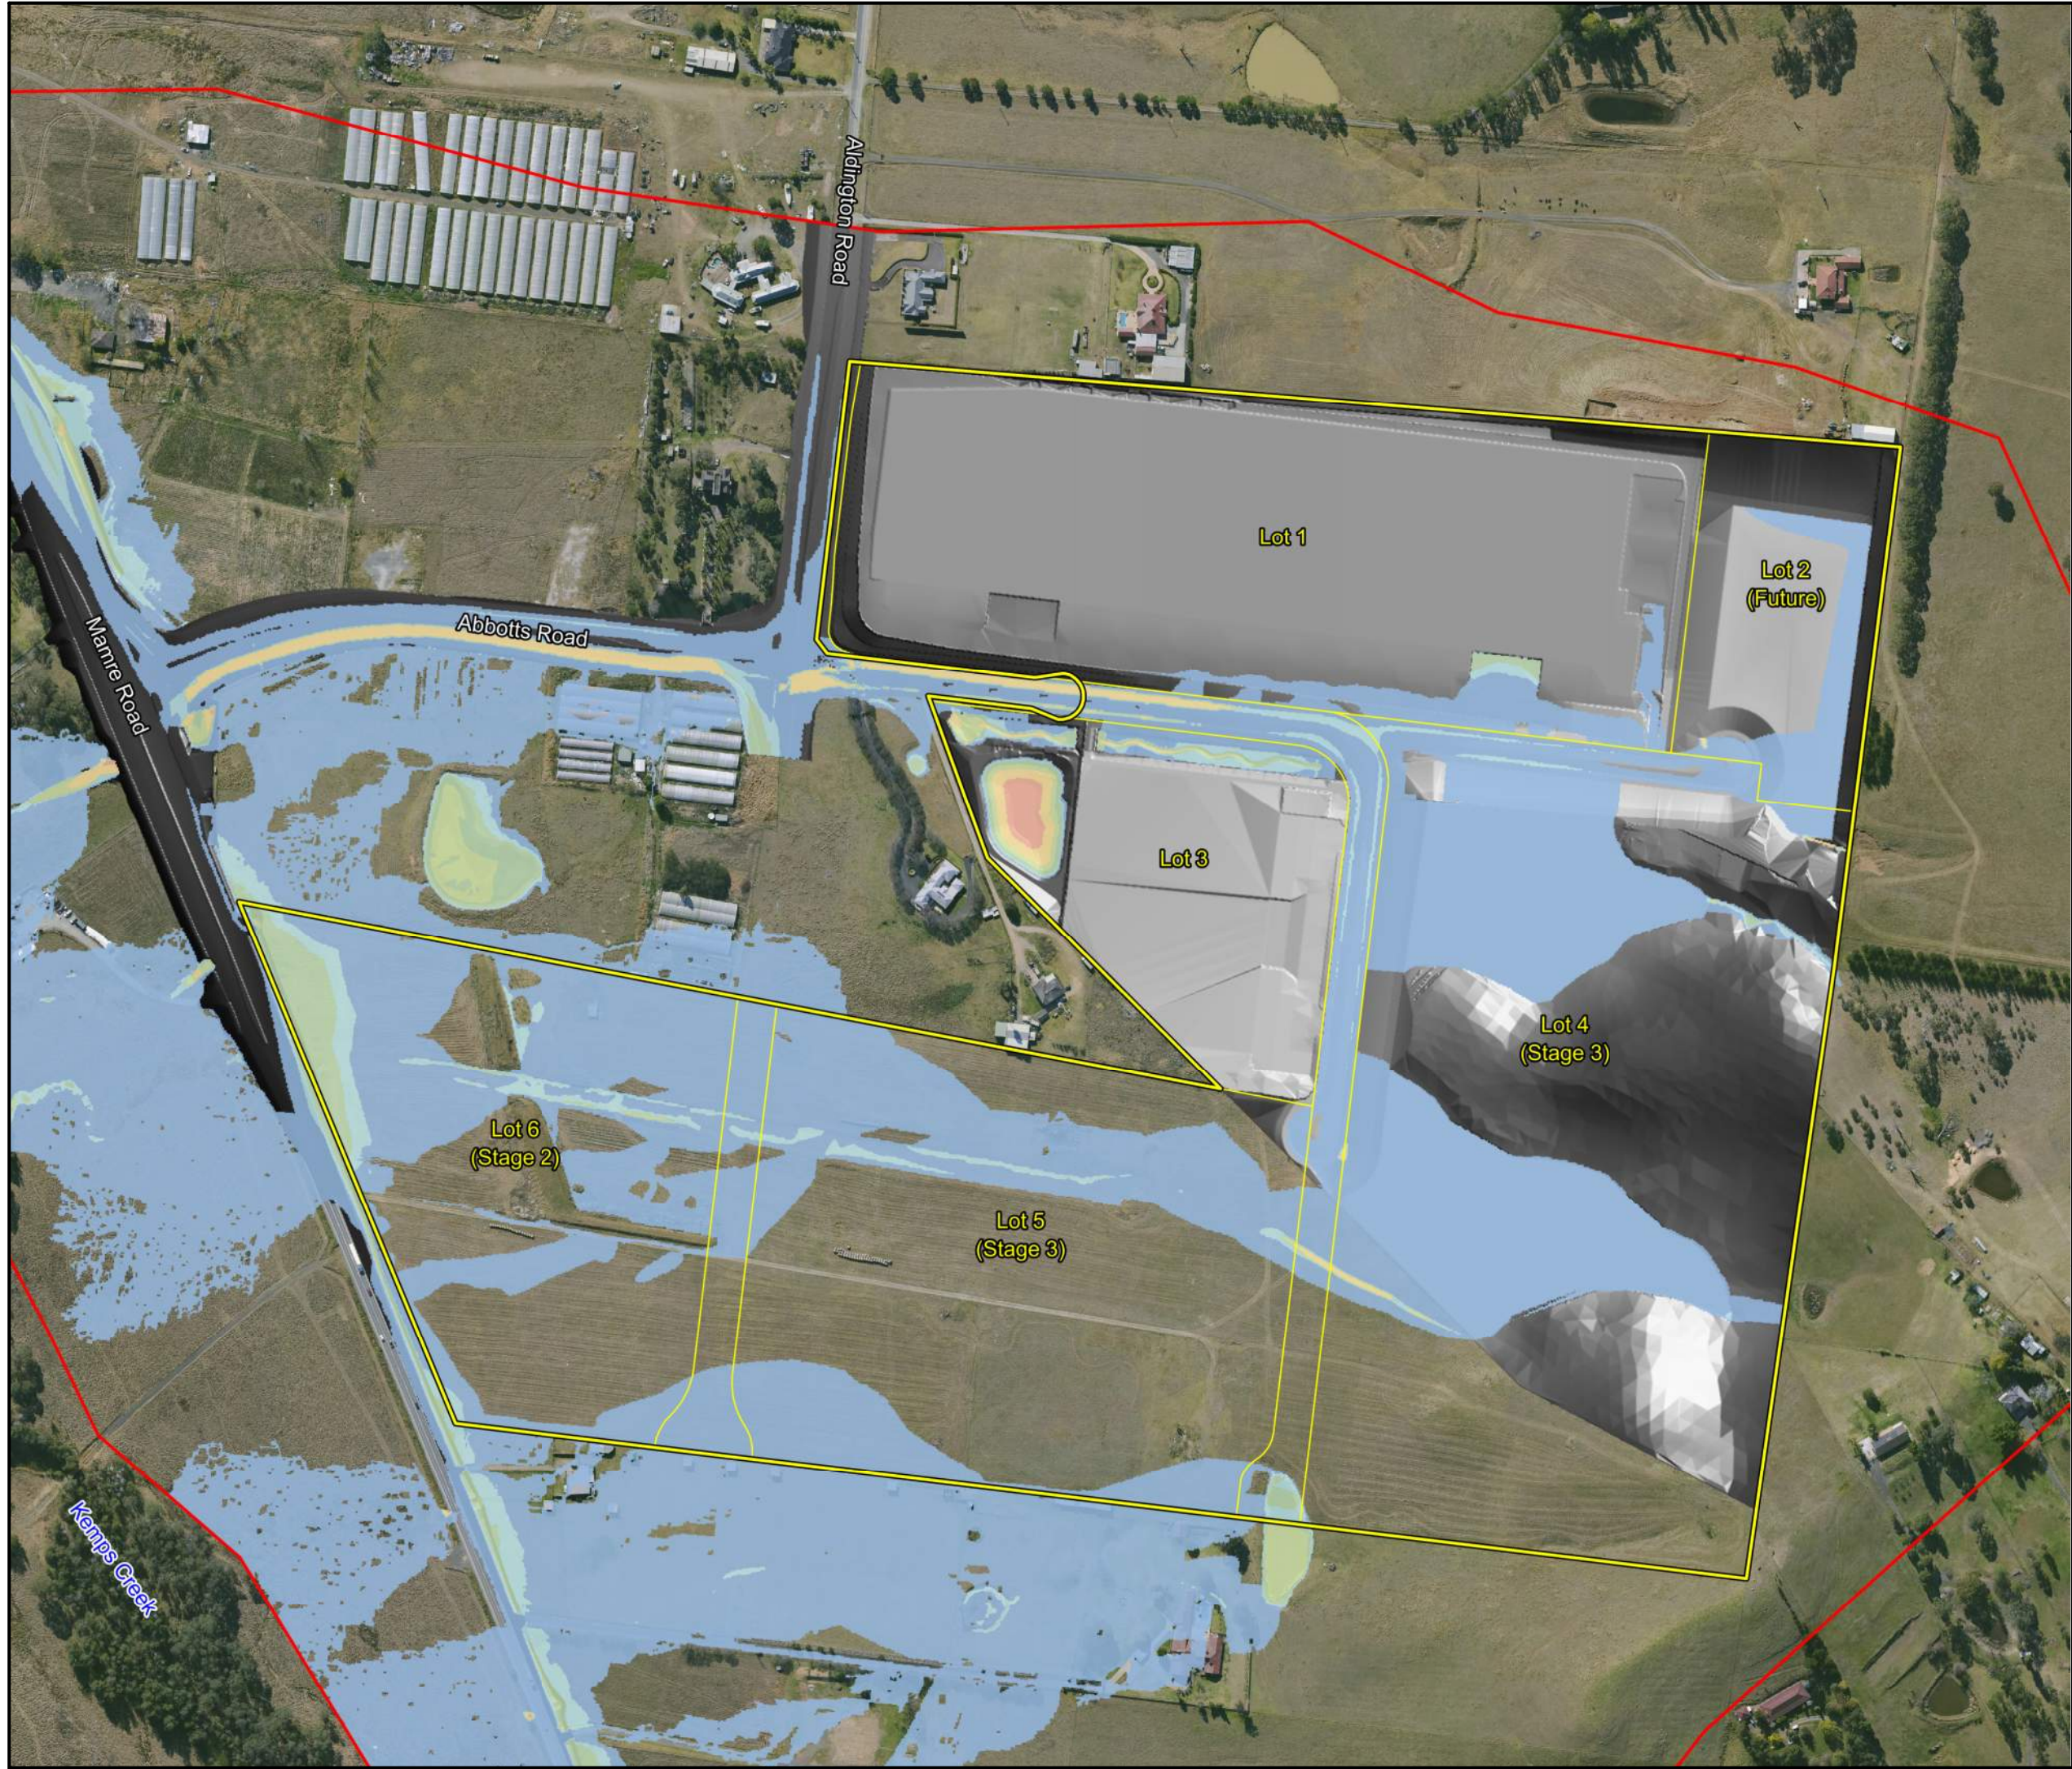



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Interim Stage 1 (Base Conditions) DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-17

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


0.5% AEP

Base Conditions NoTW

Flood Hazard

Date: 22/01/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-18_BASE02_0p2pc_HAZ_A.wor

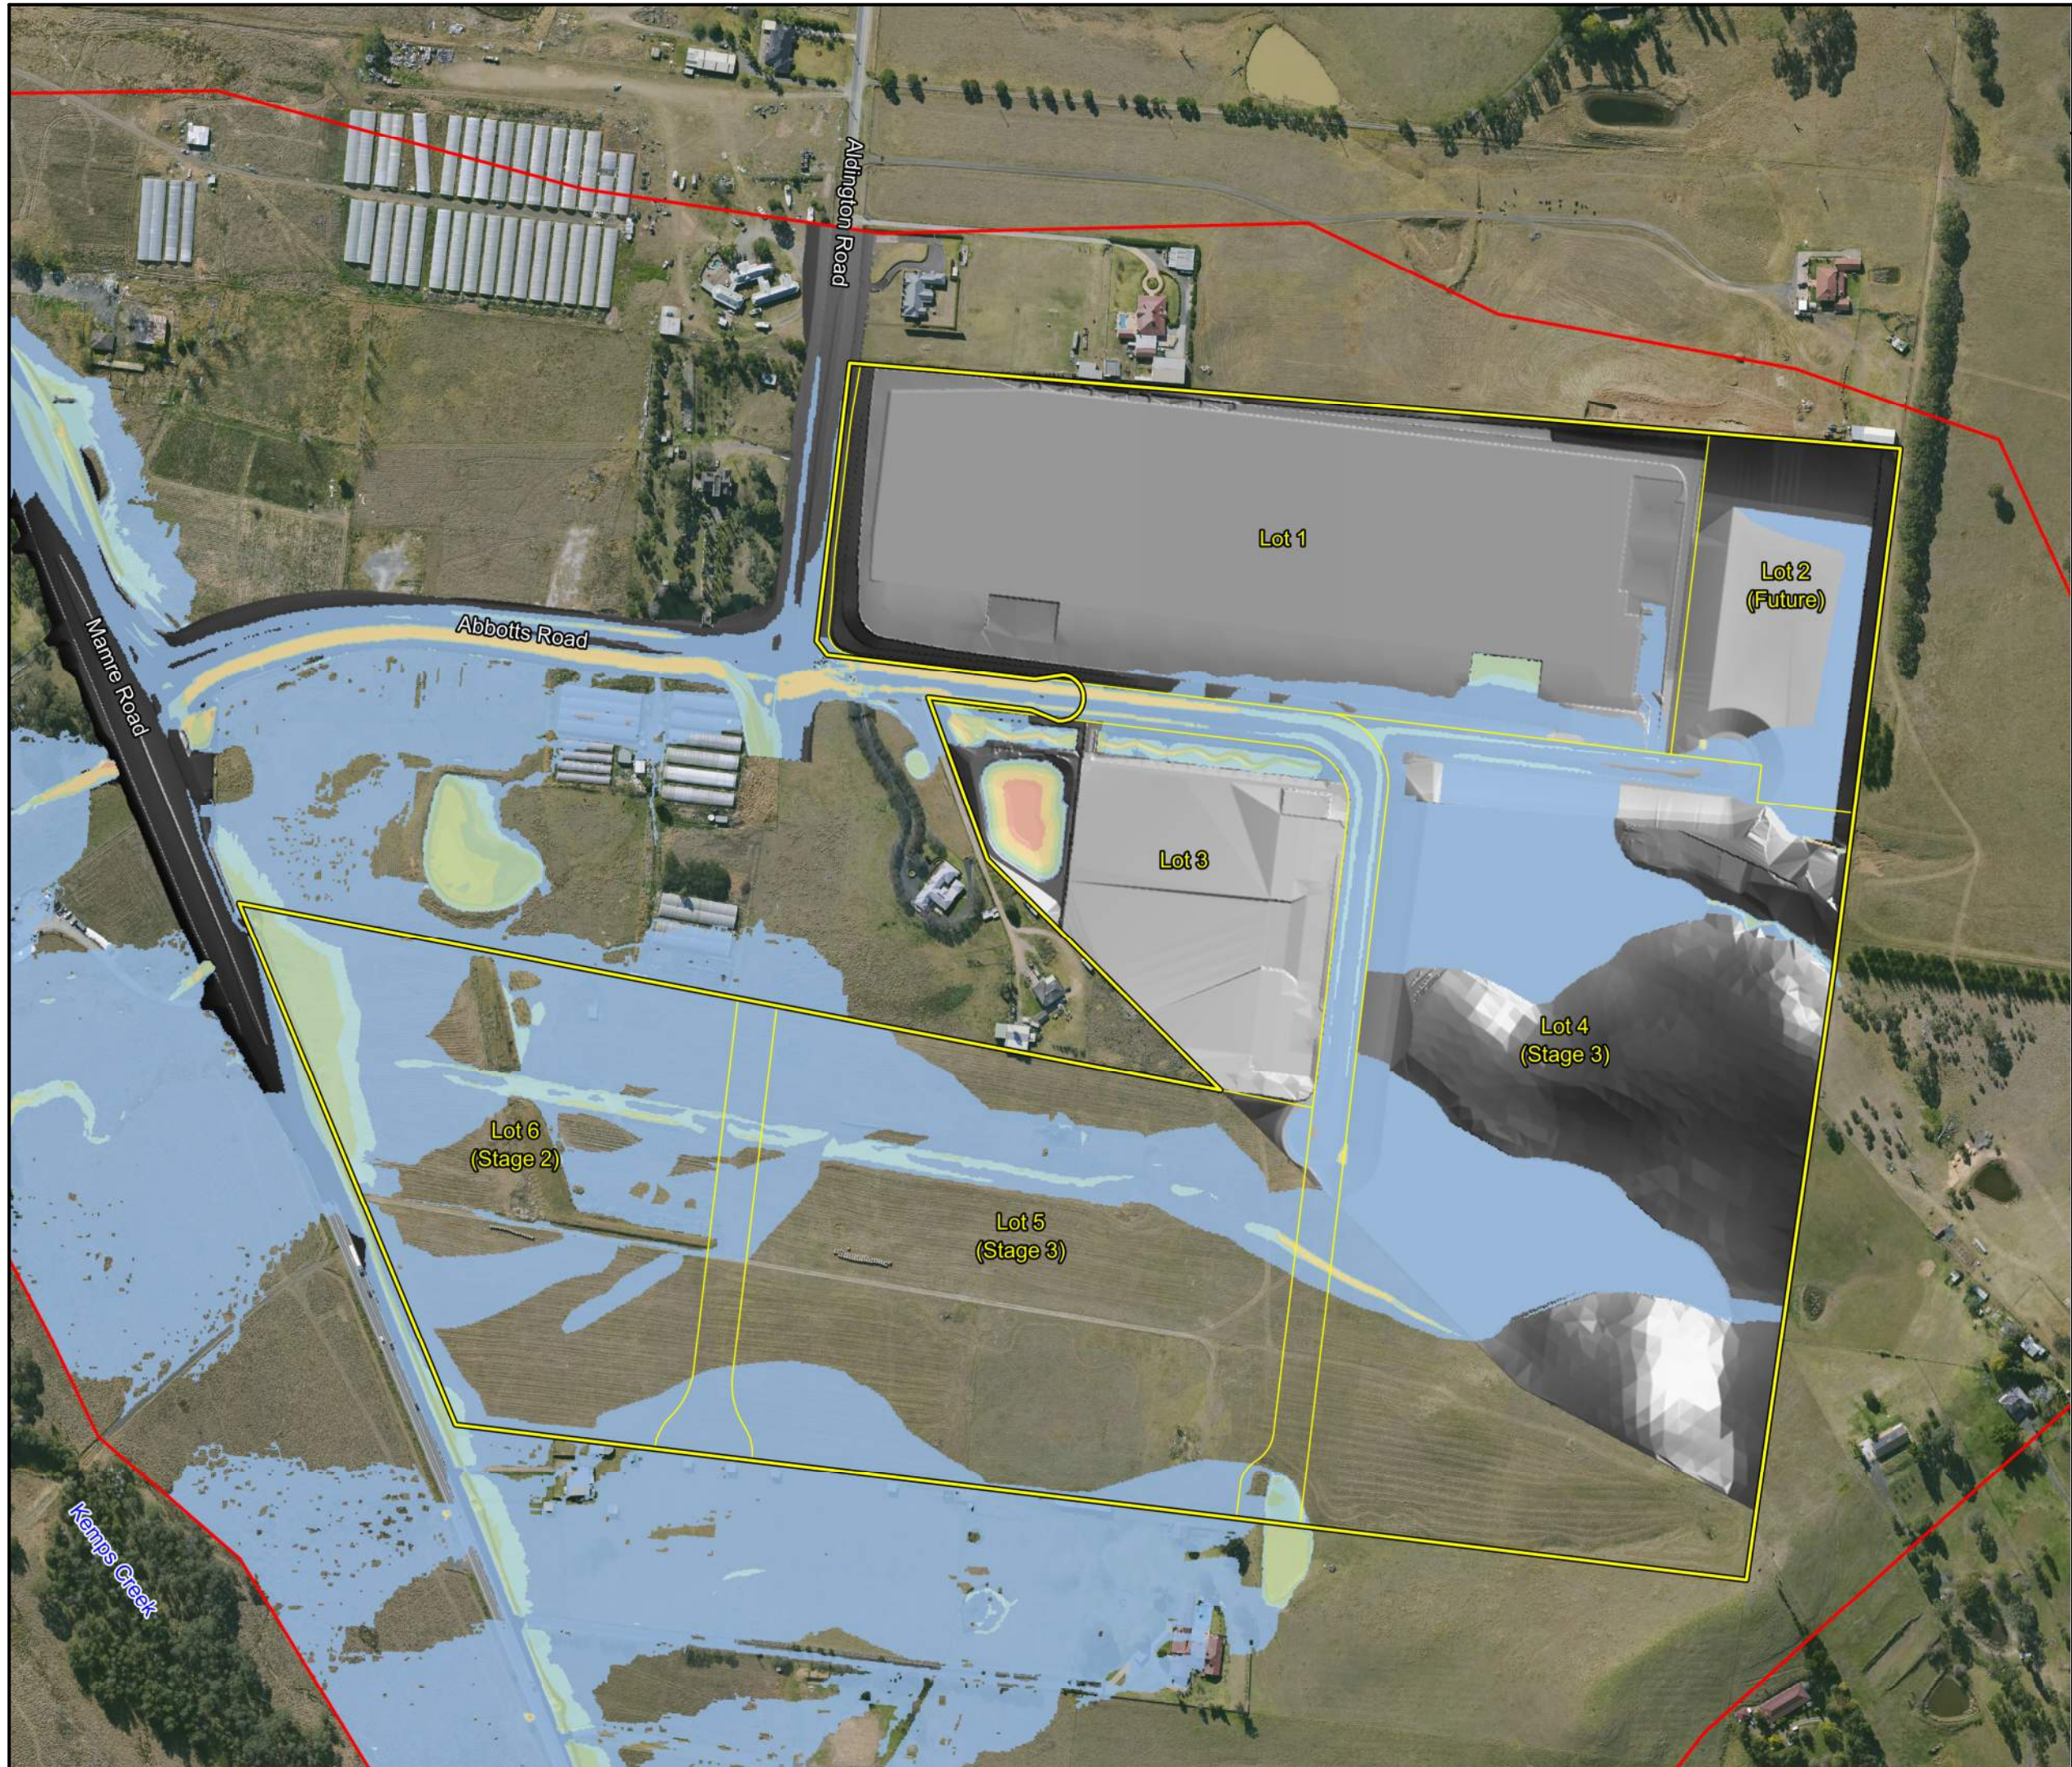



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Interim Stage 1 (Base Conditions) DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-18

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


0.2% AEP


Base Conditions NoTW

Flood Hazard

Date: 22/01/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-19_BASE02_PMF_HAZ_A.wor

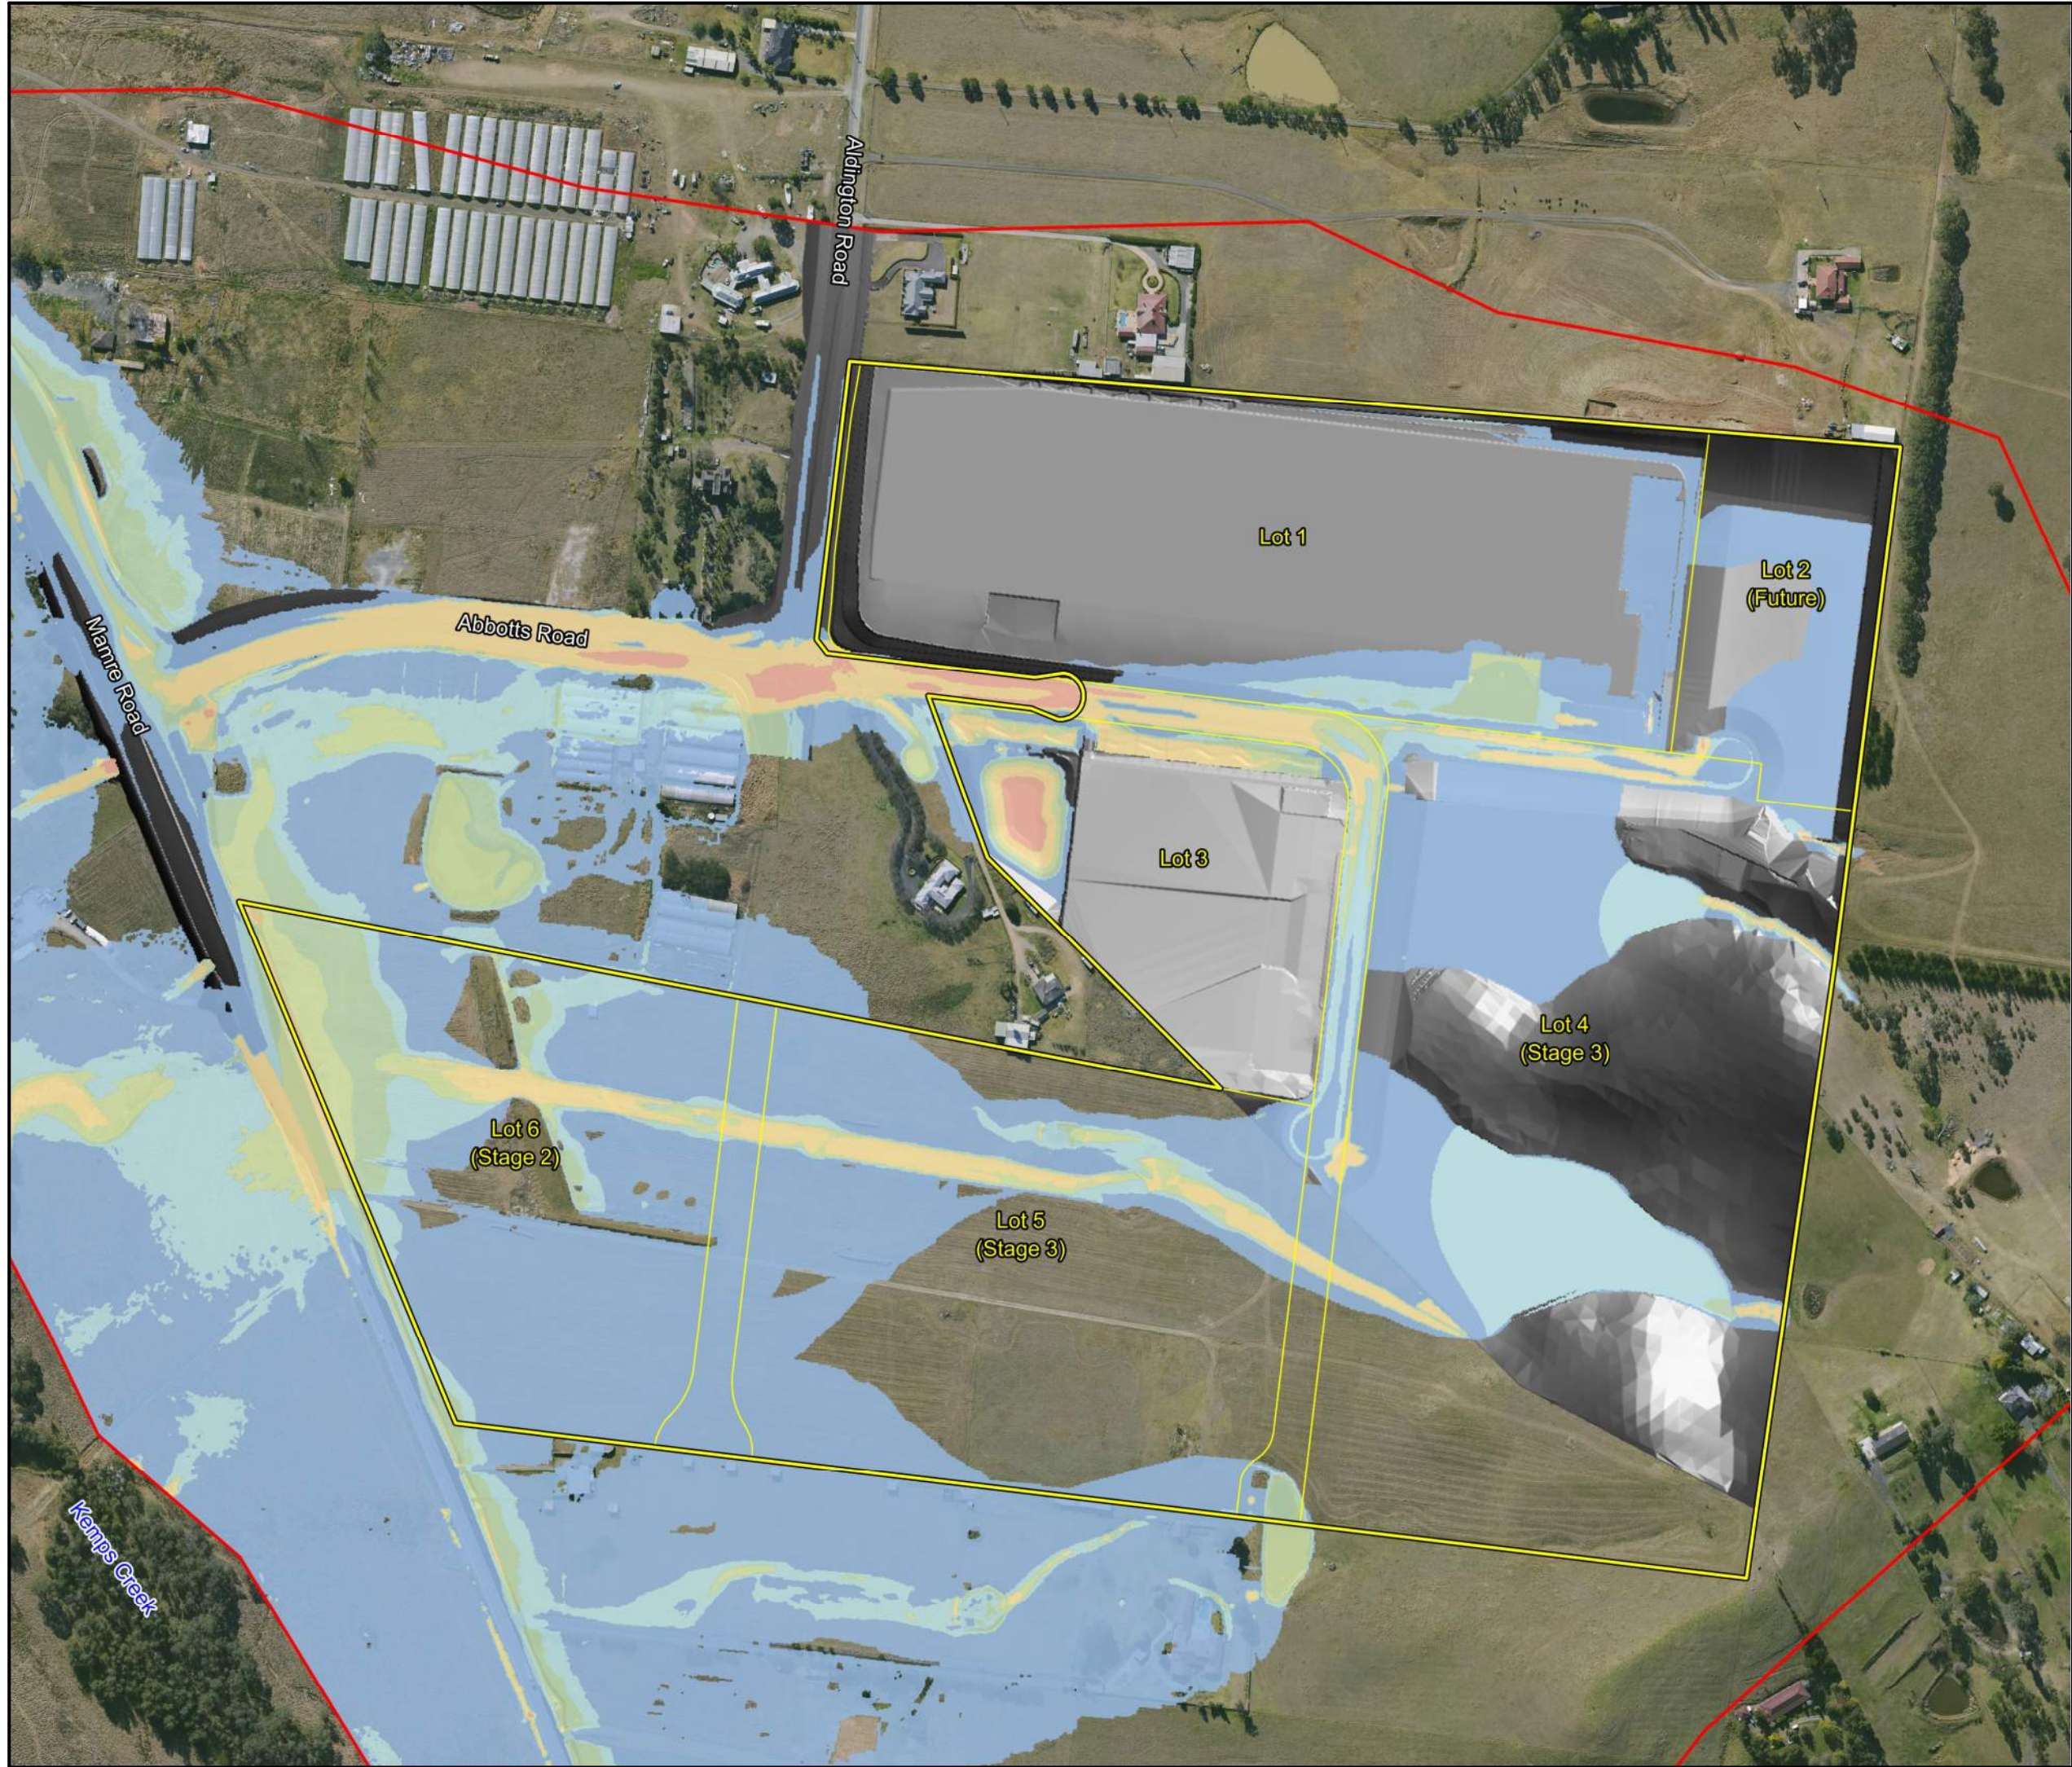



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Interim Stage 1 (Base Conditions) DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-19

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


PMF


Base Conditions NoTW

Flood Hazard

Date: 22/01/2025 Issue: A







Filename: J:\110965 - Westlink\SWFMap\infol\Figures\ST2 FIRA\110965-04_Fig5-20_DES04_5pc_HAZ_A.wor

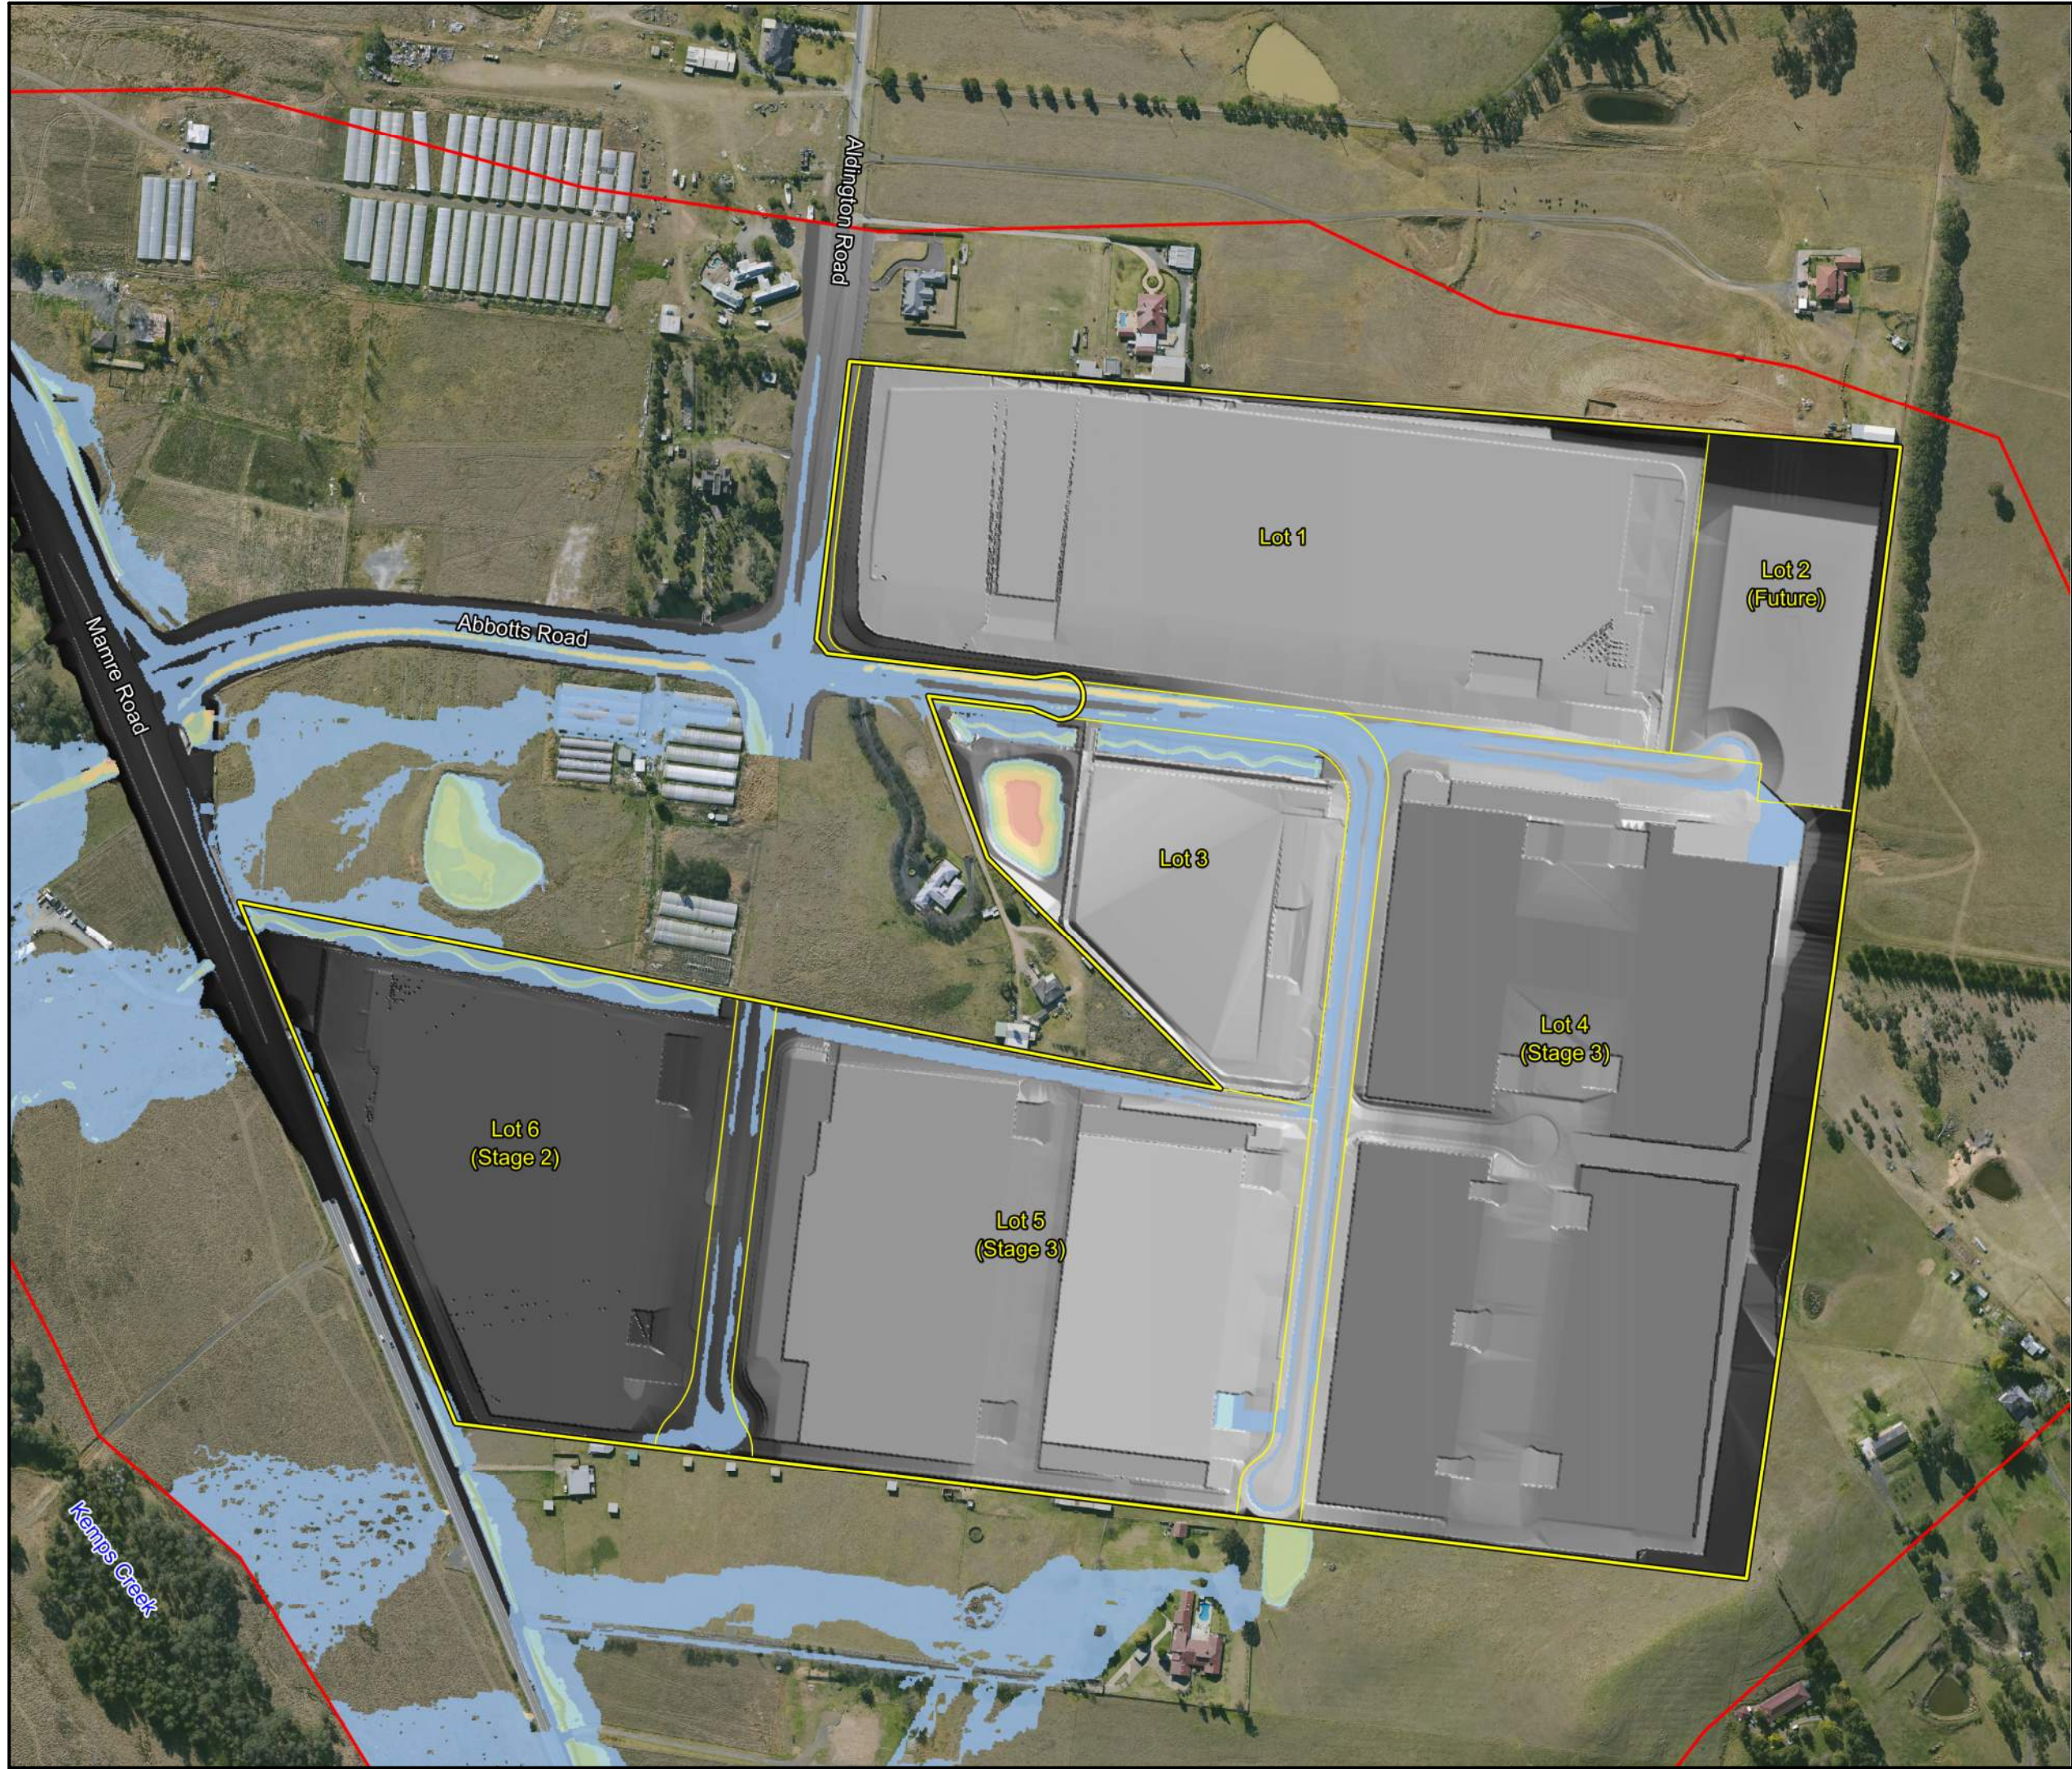








LEGEND

FLOOD HAZARD

	H1 - Generally safe.
	H2 - Unsafe for small vehicles.
	H3 - Unsafe for vehicles, children and the elderly.
	H4- Unsafe for people and vehicles.
	H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
	H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

	Site Boundary
	Westlink Lot Boundaries
	Stage 2, Lot 4 & Lot 5 DEM
	TUFLOW Model Boundary



N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-20

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk

5% AEP


Developed Conditions NoTW


Flood Hazard

Date: 22/01/2025

Issue: A

Filename: J:\110965 - Westlink\SWFMap\infol\Figures\ST2 FIRA\110965-04_Fig5-21_DES04_1pc_HAZ_A.wor

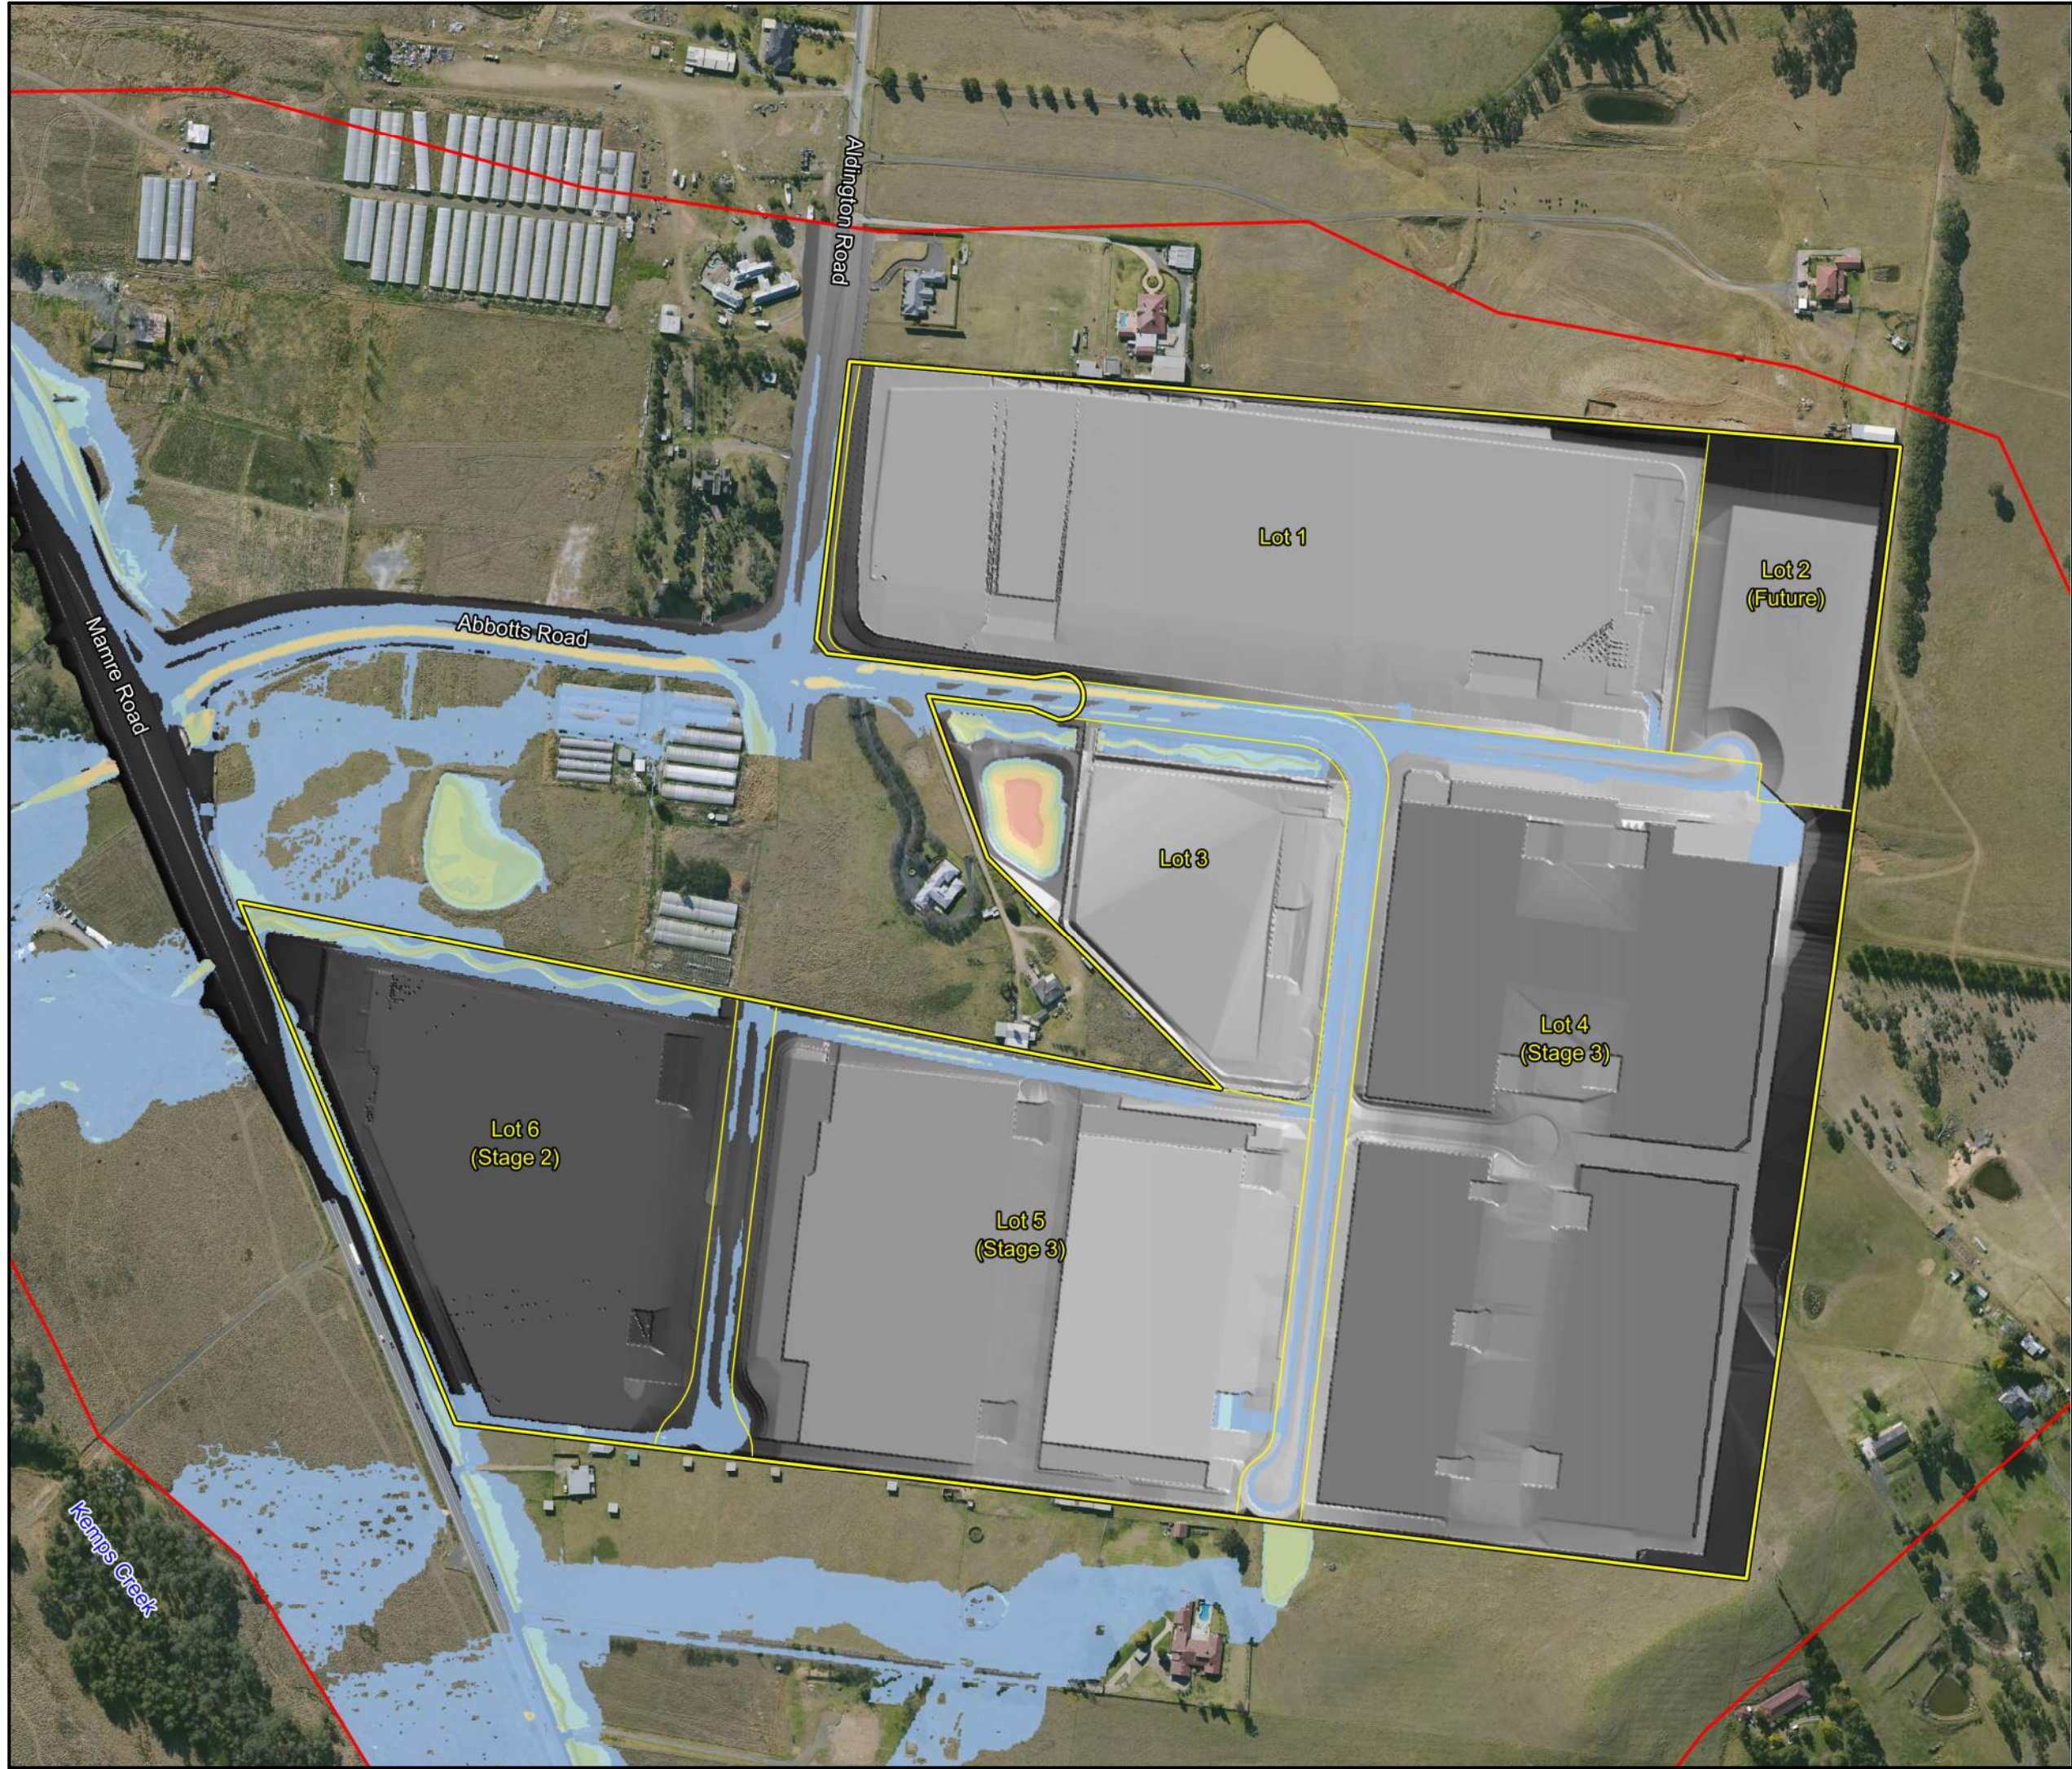




LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Stage 2, Lot 4 & Lot 5 DEM
- TUFLOW Model Boundary



N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-21

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk

1% AEP


Developed Conditions NoTW


Flood Hazard

Date: 22/01/2025

Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-22_DES04_op5pc_HAZ_A.wor

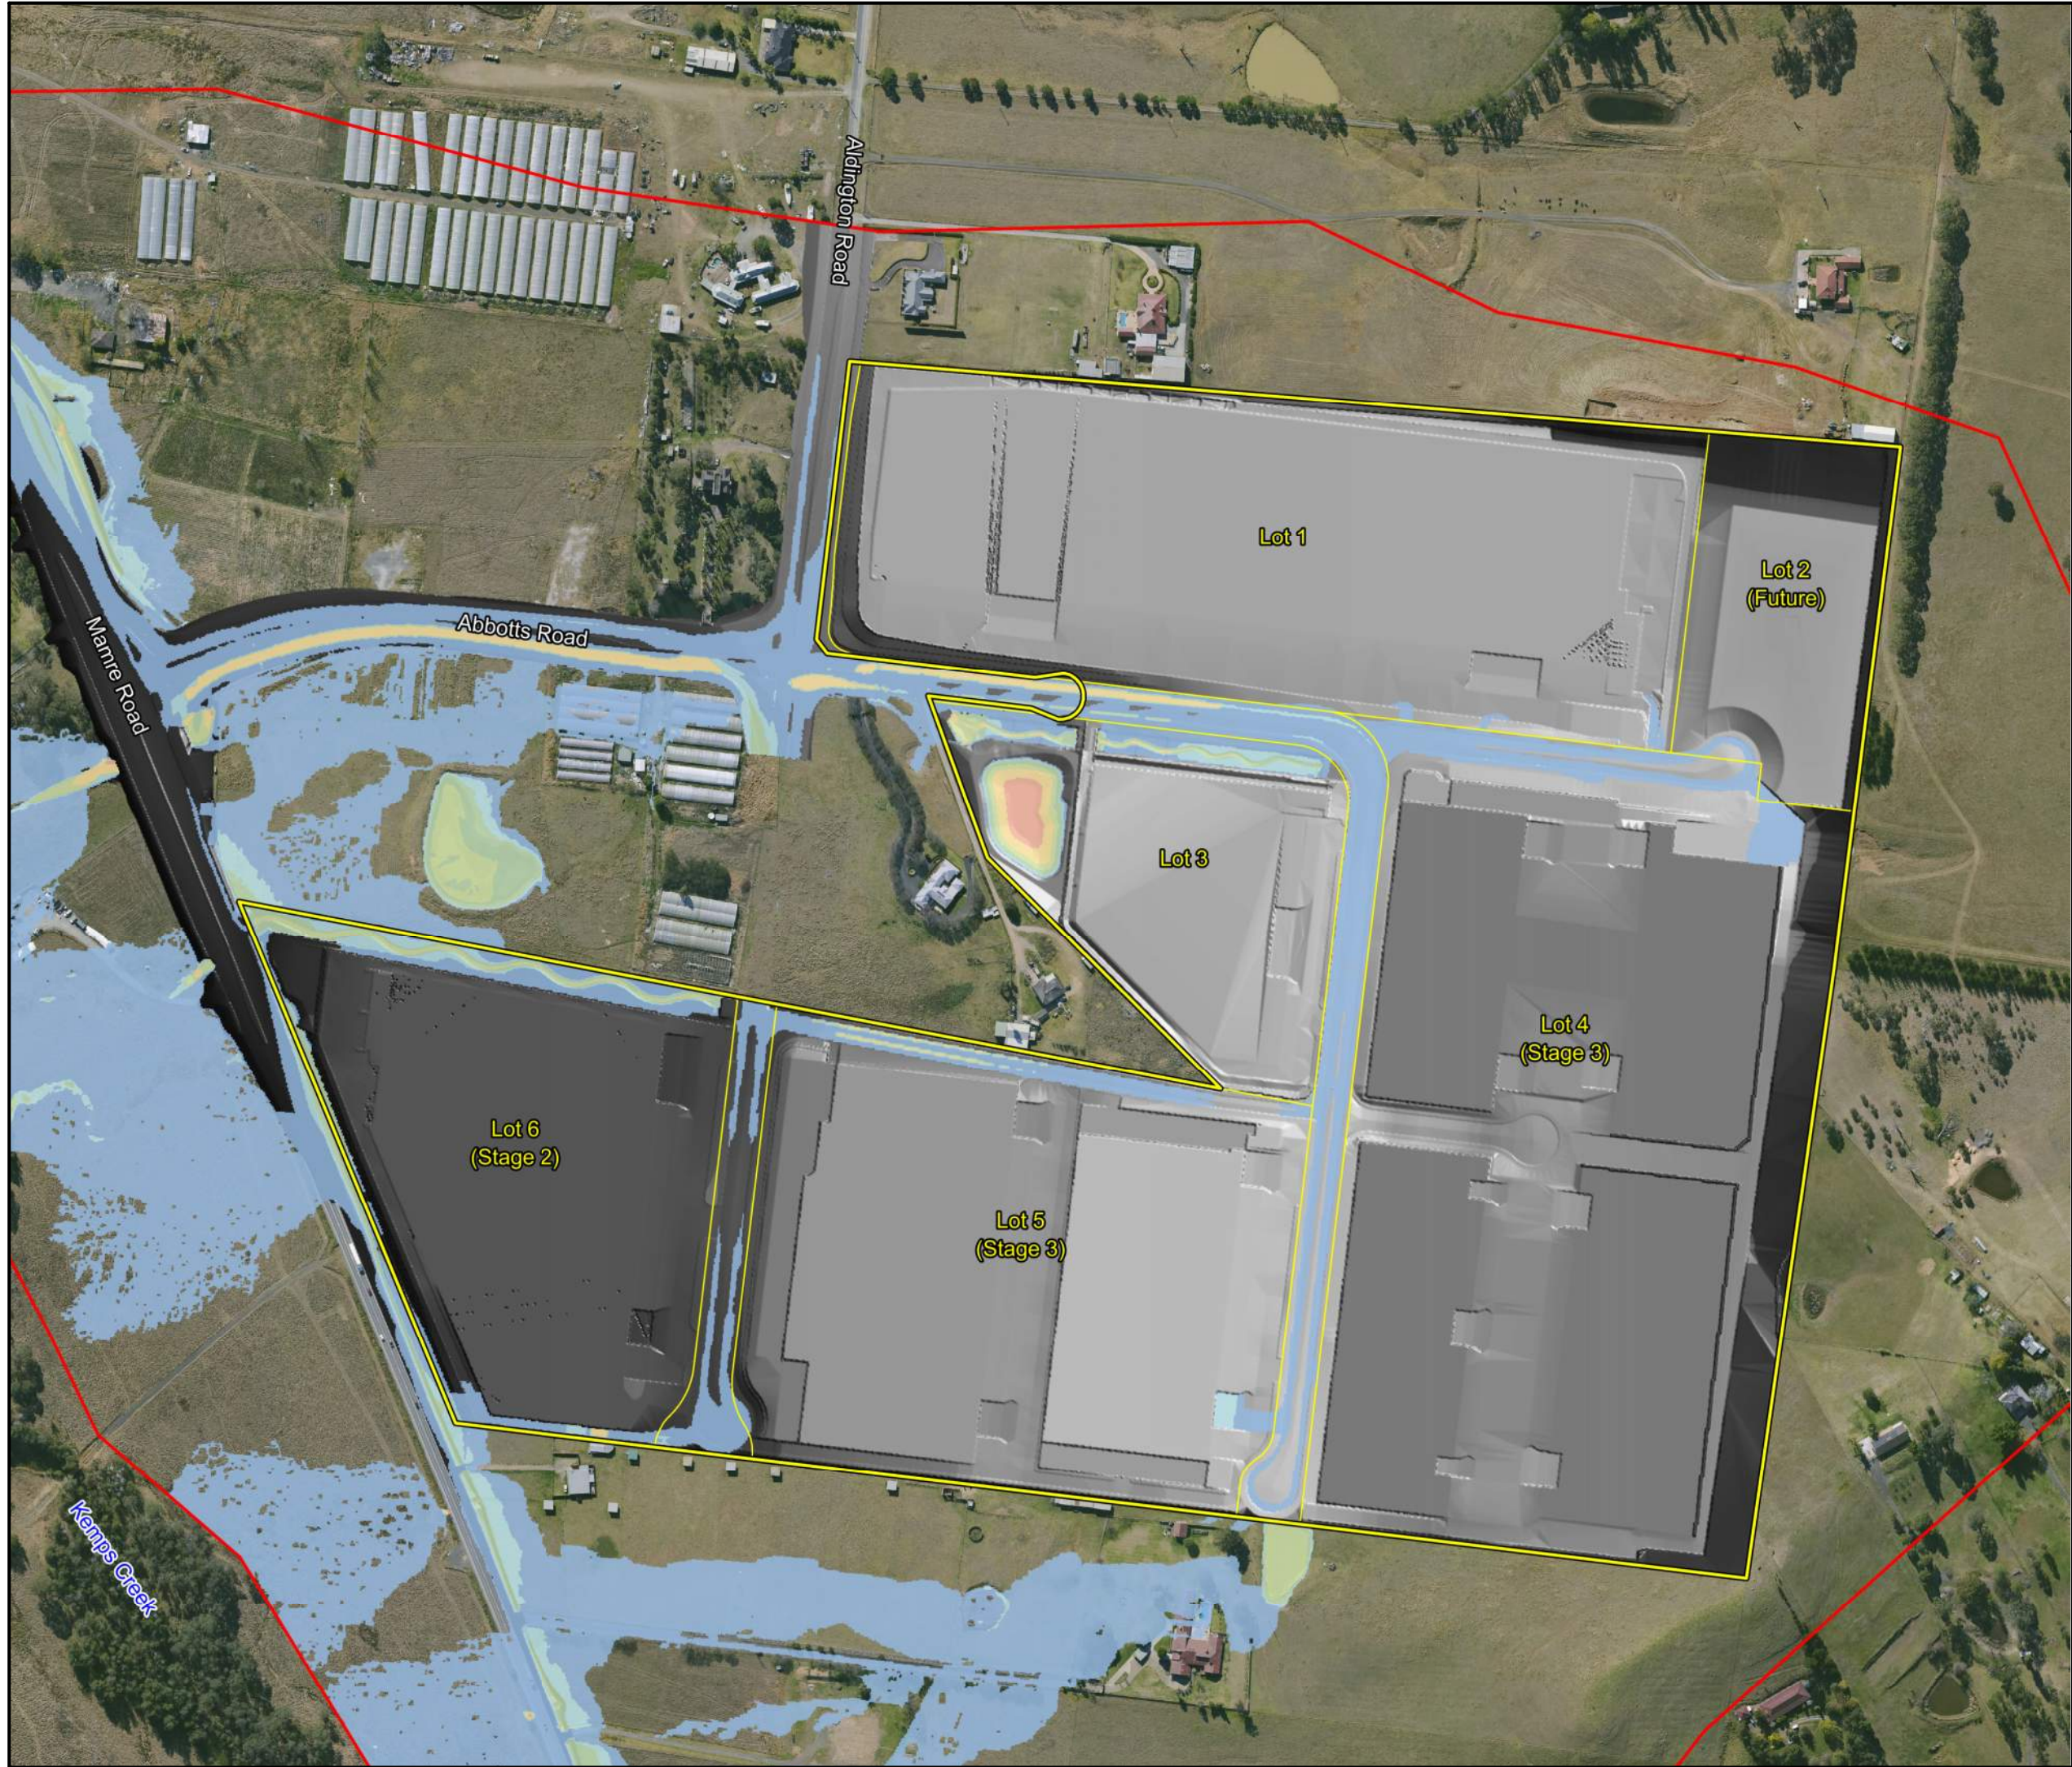



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Stage 2, Lot 4 & Lot 5 DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-22

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


0.5% AEP


Developed Conditions NoTW

Flood Hazard

Date: 22/01/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-23_DES04_op2pc_HAZ_A.wor

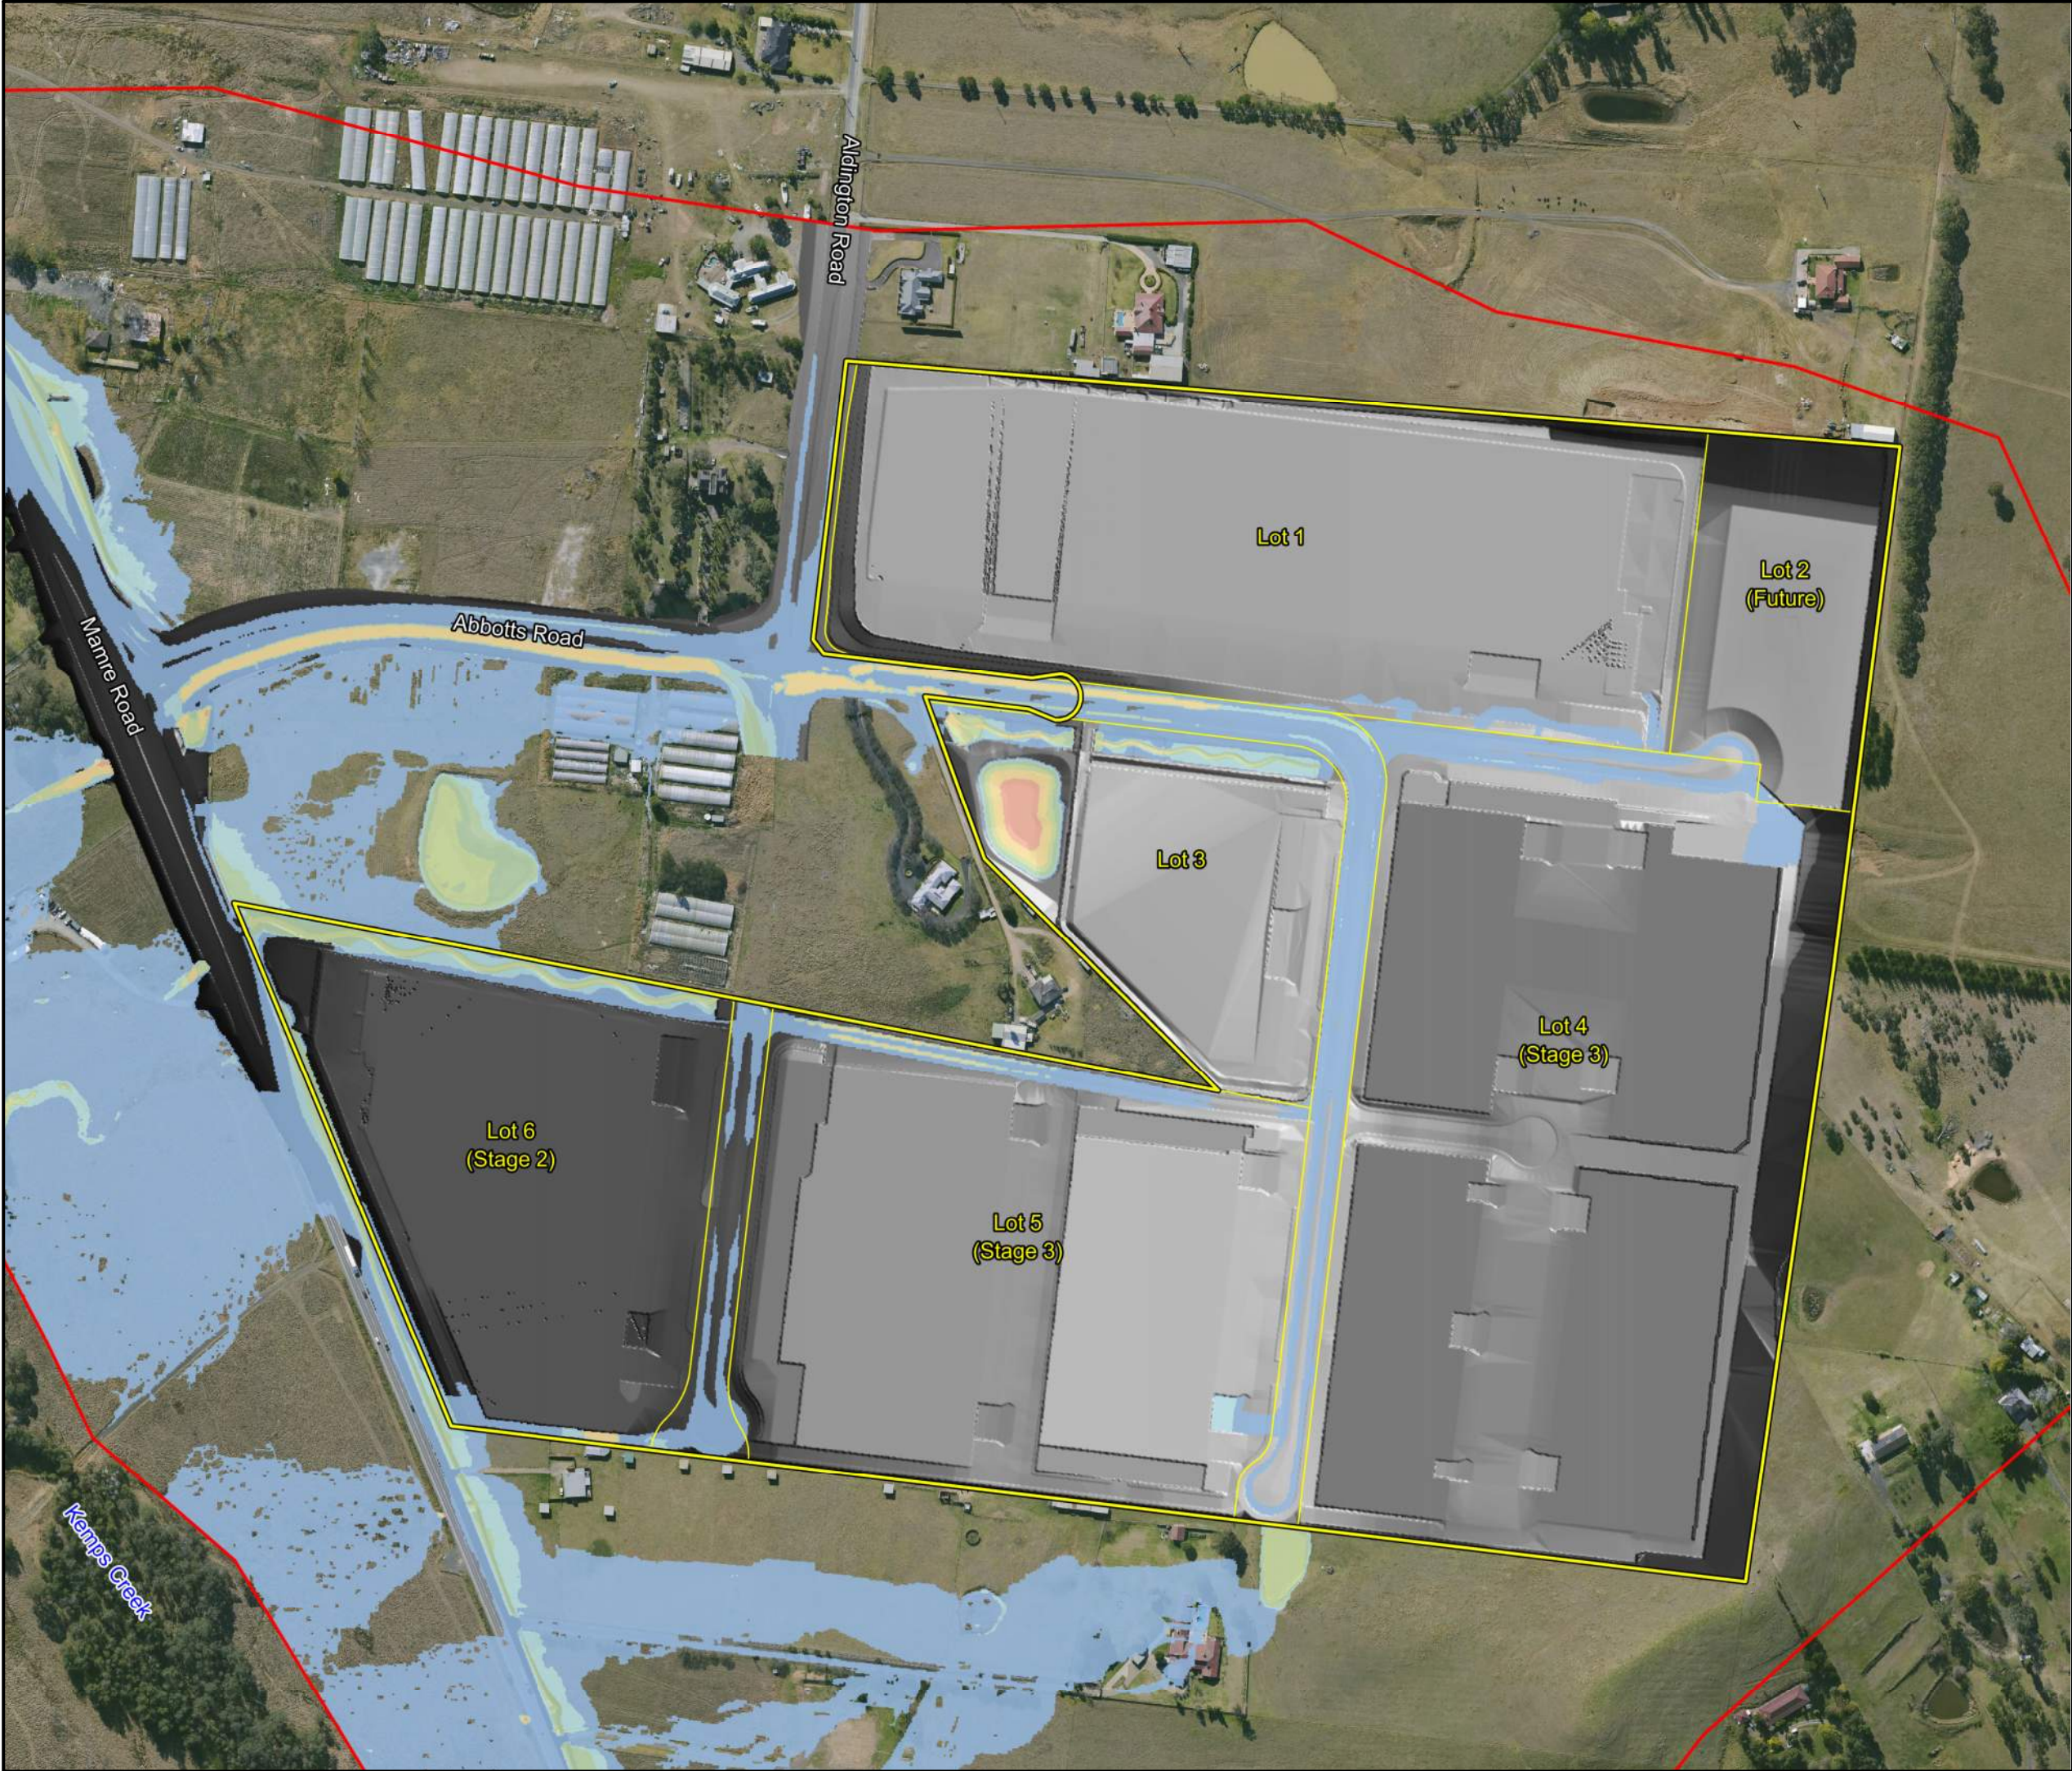



LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Stage 2, Lot 4 & Lot 5 DEM
- TUFLOW Model Boundary

N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-23

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk


0.2% AEP

Developed Conditions NoTW

Flood Hazard

Date: 22/01/2025 Issue: A

Filename: J:\110965 - Westlink\SWFMapinfo\Figures\ST2 FIRA\110965-04_Fig5-24_DES04_PMF_HAZ_A.wor

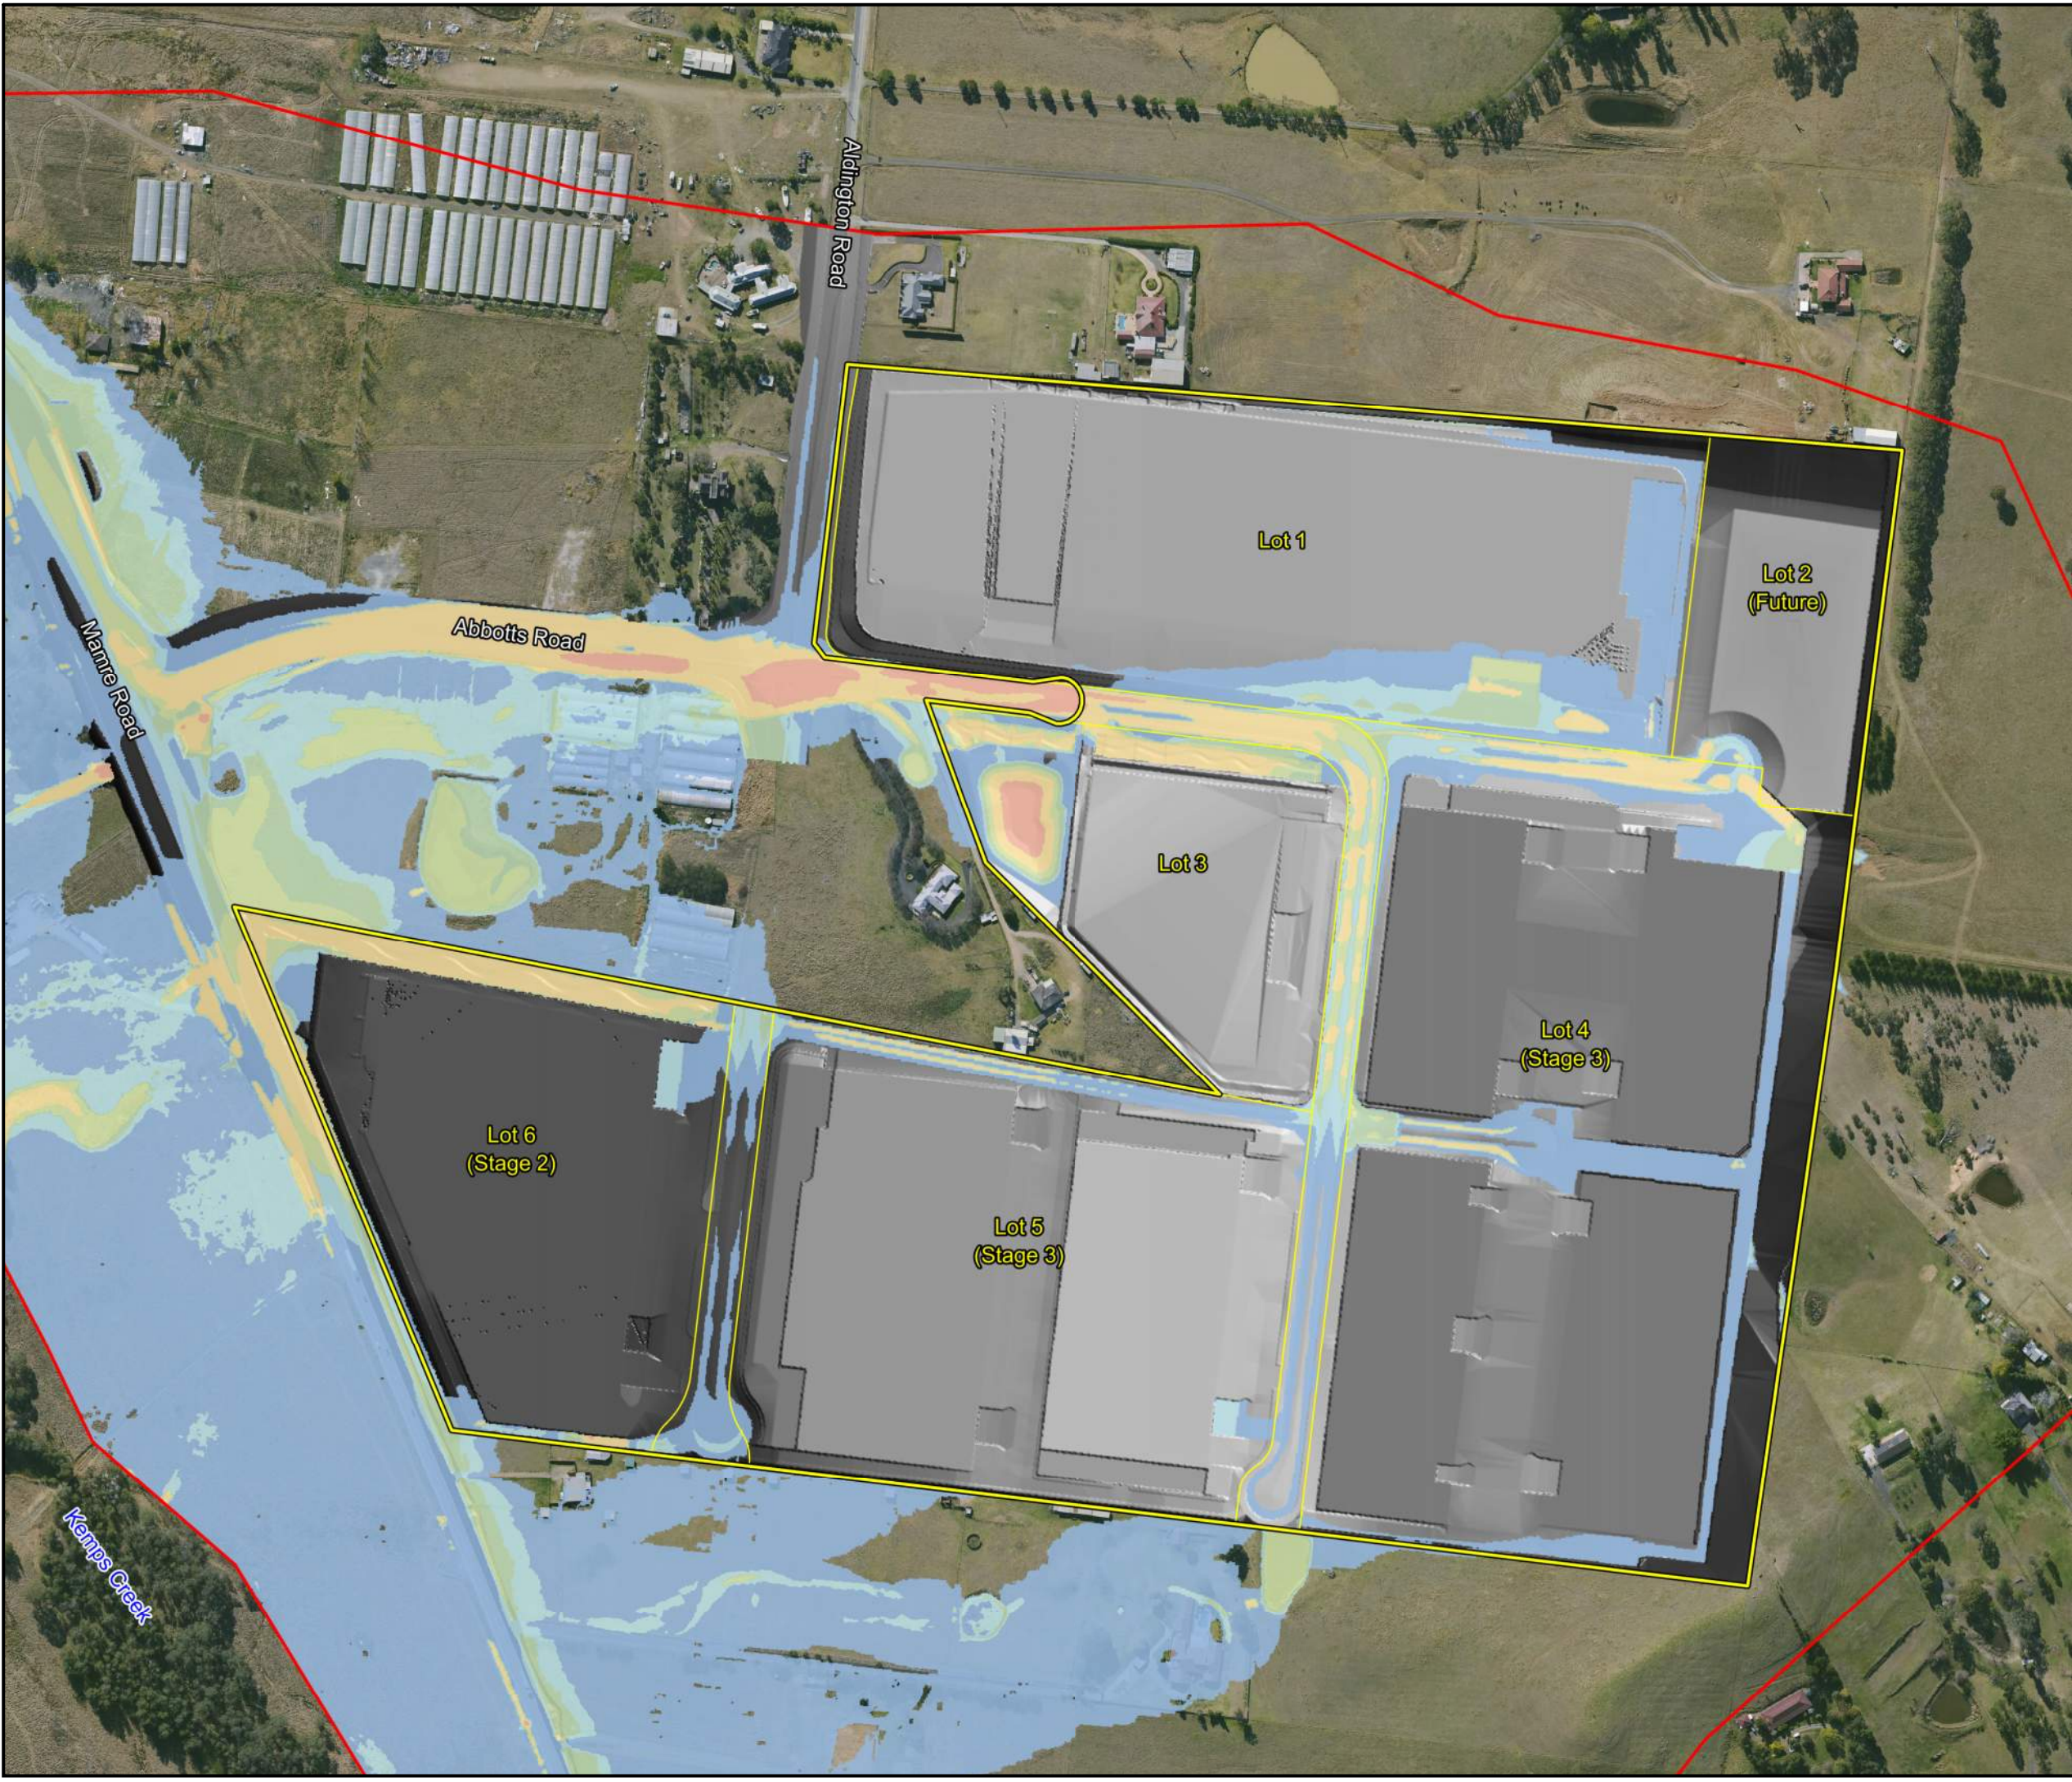




LEGEND

FLOOD HAZARD

- H1 - Generally safe.
- H2 - Unsafe for small vehicles.
- H3 - Unsafe for vehicles, children and the elderly.
- H4- Unsafe for people and vehicles.
- H5 - Unsafe for vehicles and people. All buildings vulnerable to structural damage.
- H6 - Unsafe for vehicles and people. All buildings vulnerable to failure.

- Site Boundary
- Westlink Lot Boundaries
- Stage 2, Lot 4 & Lot 5 DEM
- TUFLOW Model Boundary



N

0 160

metres

Scale 1:4,000 @ A3

Projection: GDA 2020 MGA Zone 56

Figure 5-24

Westlink Stage 2, Lot 4 & Lot 5

Flood Impact and Risk

PMF

Developed Conditions NoTW

Flood Hazard

Date: 22/01/2025

Issue: A

APPENDIX B

INDICATIVE DRAFT FLOOD EMERGENCY RESPONSE PLAN

DRAFT Flood Emergency Response Plan

Westlink Industrial Estate – Lot 6

Site Address: Lot 6 in DP XXXXXX, Mamre Road Kemps Creek

The Westlink Industrial Estate is located within the Wianamatta/South Creek catchment and is located adjacent to Kemps Creek which is approximately 350 m to the west of the site.

A comprehensive Flood Impact and Risk Assessment (FIRA) has been developed for the southern portion of the Westlink Industrial Estate which includes Lot 6. A copy of this document can be obtained at "[Web link to Online version](#)". The flood assessment demonstrates that:

- The Westlink Industrial Estate is located at an elevation that is higher than the regional maximum (i.e. PMF) flood levels identified in the Wianamatta (South) Creek Catchment Flood Study (2020). Consequently, evacuating the site is not required when a regional flood event arises on South Creek.
- Local flooding arising from rainfall falling on the site and the upstream sub-catchment in events up to the 0.2% (1 in 500 yr) Annual Exceedance Probability (AEP) flood is safely managed by the stormwater and flood management infrastructure provided within the Westlink Industrial Estate.
- In the rare case that a more extreme local flood occurs on the site (for example a Probable Maximum Flood event that has an approximate annual exceedance probability of 1 in 10,000,000 years), flood-related hazards become unsafe for vehicles and people in most hardstand areas and roadways. As these extreme events are characterised by a fast flood rise and fall response, evacuation from the floodwaters ahead of this risk is not viable as it is not possible to confirm the impending risk and then evacuate before the peak of the hazard occurs on the site. Consequently, it will be necessary to shelter in place within the building until the flood water recedes. The proposed finished floor level of the building is at least 0.3 m above the maximum external PMF flood level on Lot 6 (refer to Plate 1). Consequently, any location within the main building will be suitable for shelter-in-place purposes.

Before a flood occurs

1. The Site Manager is responsible for alerting all staff and patrons that the property is flood-affected. The Site Manager should convene periodic flood emergency training sessions with staff and circulate this Flood Emergency Response Plan to maintain awareness. As it will be impossible to resolve whether the heavy rain that is falling on the site is an event that is more extreme than the relatively safe 0.2% (1 in 500 yr) event, there is a likelihood that unnecessary flood response triggers will occur on occasion. As the response will be "get inside the building if it rains heavily", there is a limited risk of evacuation fatigue.
2. The Site Manager should prepare a list of emergency phone numbers and contact details for staff and the various group and/or building managers on site. This plan should also indicate these, and it should be posted at strategic locations within the building.
3. During expected wet weather and summer storm periods, the Site Manager or designated Flood Response Coordinator should monitor the Bureau of Meteorology (BoM) severe weather warning announcements for advice regarding heavy rainfall in the South Creek catchment and the Kemps Creek area and listen to local radio stations such as ABC 702 AM for weather warning updates and advice. Please be aware that flash flooding can occur quickly, and there may not be any specific flood warning issued for your local area; in these circumstances, situational awareness and good judgment will need to be exercised.
4. The Site Manager and all staff should be prepared and know what each staff member must do if flooding occurs.
5. For further information on being flood-prepared, visit www.ses.nsw.gov.au

During heavy rain and prolonged storms

6. Secure objects that can float and cause damage, for example, garbage bins.
7. Turn off and disconnect any large electrical items that cannot be raised to a higher level.
8. Monitor any flow of water and ponding at stormwater pits around the site and be prepared to initiate an instruction for staff to implement the agreed flood emergency actions, including moving inside the building.

After a flood event triggering a Shelter in Place action

9. Have an electrician check any electrical items before use if affected by floodwaters.
10. Monitor and review the emergency procedures and refine them based on any operational lessons learnt.

Other Items

11. A coloured laminated copy of this Flood Emergency Response plan must be permanently attached in a conspicuous place where the site manager and other relevant staff can easily locate it. Recommended locations are the site manager's office, staff rooms and in a prominent location within each building.

Secondary Emergency Protocols

12. Medical Emergency:

- A designated emergency coordinator will monitor occupants and ensure medical assistance is sought if required.
- In a medical emergency, contact emergency services (ambulance, paramedics) immediately once floodwaters begin to recede.

13. Building Fire Emergency:

- If a fire occurs during a flood, occupants will follow pre-determined fire evacuation procedures while considering flood conditions.

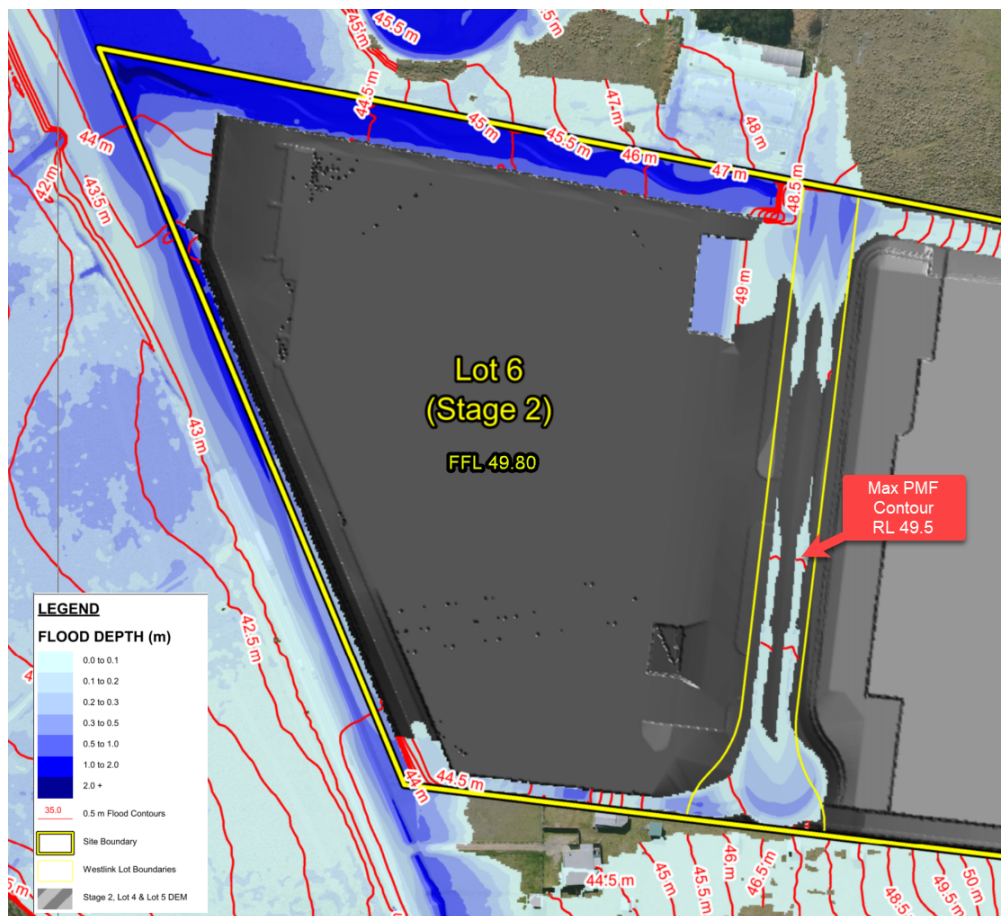


Plate 1 – PMF Flood depths and levels at Lot 6

This Flood emergency response plan should be reviewed in 2029 and every 5 years after that.

APPENDIX C

RFI RESPONSE MATRIX

AGENCY RFI's AND ASSOCIATED RESPONSES
WESTLINK STAGE 2

Item	Agency	RFI Item	Tag	Consultan	Status	Response
4	CPHR	CPHR highlights that there are contradicting statements on the developed conditions as follows: Section 2.3 of the FIRA states, 'The proposed Stage 2 development consists of bulk earthworks for Lots 2, 4 & 5, roadworks, stormwater drainage, utility services and the construction of one (1) warehouse building (Lot 6).' <p>However, Section 4 the FIRA states, 'the proposed developed conditions model builds upon the baseline model and incorporates design components associated with Westlink Stage 2, Lot 4 and Lot 5.'</p> <p>Also, Figure 4-4 developed conditions in the FIRA (shown as Figure 2 below) identifies all lots except Lot 2 are represented in the developed condition as buildings with a very high Manning "n" value of 2.0, that are totally blocking the buildings footprints at Lots 1, 3, 4 and 5. In contrast, Lot 2 is represented as a light vegetated site. This is inconsistent with both above-mentioned statements.</p>	Flood Description	JWP	Open	<p>The FIRA Report has been updated to clarify the development components seeking approval under this FIRA (see section 2.3.1 of the report). The developed conditions being modelled in TUFLOW align with the works seeking approval.</p> <p>The Lot 2 building has not been assessed in this FIRA. As Section 2.3.1 of the FIRA mentions, Westlink Stage 2 comprises BEW in Lot 2 only.</p>
5	CPHR	Provide clarification and a clear description of the developed conditions represented in the FIRA.	Flood Description	JWP	Open	The FIRA Report has been updated to clarify the development components seeking approval under this FIRA (see section 2.3.1 of the report). The developed conditions being modelled in TUFLOW align with the works seeking approval.
6	CPHR	Buildings are the most significant impediment to overland flow, as they influence the flooding behaviour by deflecting the flows. As previously discussed, Figure 2 above shows the model has totally blocked flow from entering the buildings at Lots 1, 3, 4 and 5 by assigning a very high Manning "n" value of 2.0. CPHR acknowledges that the floor levels for these buildings are proposed to be above the Probable Maximum Flood (PMF). However, there are proposed two-level basement car parking and under croft car parking. During a significant flood event, flows would enter the parking areas once their floor level is reached.	Flood	JWP	Open	The impediment of buildings conservatively assesses the impacts of deflecting flows elsewhere.
7	CPHR	The FIRA should address the risk of basement and under croft carparking inundation and propose passive management measures, such as design controls. Any remaining risk should be addressed from an emergency management perspective.	Flood	JWP	Open	There is no basement parking proposed in Westlink. The entries and exit levels of the Undercroft parking areas will be designed to prevent surcharge flows from entering the parking areas.
8	CPHR	Flood maps have been provided for the 1% Annual Exceedance Probability (AEP) detailing impacts on flood depth and velocity.	Flood	JWP	Open	Noted

9	CPHR	Flood impact maps for depth, velocity and hazard should be provided for the full range of flood events, up to and including the PMF.	Flood	JWP	Open	<p>The flood impact mapping requirements being requested are beyond the requirements set out in the Flood Risk Management Guideline LU01 - Flood Impact and Risk Assessment (2023) (specifically, Appendix A). Specifically, we have provided 1% AEP difference maps for depth and velocity, and mapped hazards for both base and developed cases for the full range of flood events. Refer to highlighted extract of LU01 below:</p> <p>Table 6 Typical outputs to be included in the FIRA report to support the proposal</p> <table><tr><th rowspan="2">Model</th><th rowspan="2">Existing case</th><th rowspan="2">Developed case</th><th rowspan="2">Calibration and validation</th><th colspan="5">Typical required design events *</th></tr><tr><th>5% &/or 10% AEP</th><th>1% AEP</th><th>0.5% AEP</th><th>0.2% AEP</th><th>PMF</th></tr><tr><td rowspan="6">Hydrology</td><td>Map: Catchment and subcatchment areas, site and hydrologic and hydraulic controls</td><td>Identify any changes in flowpaths, flow entry or discharge points</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Map: Model parameterisation</td><td>Highlight any differences</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Plot: Storm events examined highlighting events selected for hydraulic modelling</td><td>Highlight any differences</td><td></td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td>Plot: Hydrographs at gauge locations, site boundaries and hydraulic controls</td><td>Compare to existing</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td>Tabulate: Critical storm durations for different aspects selected for hydraulic modelling</td><td>Compare to existing</td><td></td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td>Plot: Hydrographs for key events used in hydraulics</td><td>Compare to existing</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td rowspan="11">Hydraulics and post-processing</td><td>Map: Study area, site and hydraulic controls</td><td>Identify any changes in flowpaths, flow entry or discharge points</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>Map: Development site with proposed works</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>Site cross-sections: Showing changes due to the development (including cut/fill and vegetation)</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Map: Model parameterisation</td><td>Highlight any differences</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Map: Peak flood extents</td><td>Compare to existing, include properties impacted</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td>Map: Peak flood depth</td><td>Compare to existing</td><td></td><td></td><td>✓</td><td></td><td></td><td></td></tr><tr><td>Map: Peak flood level (m AHD) and chainages for long section</td><td>Compare to existing</td><td></td><td></td><td>✓</td><td></td><td></td><td></td></tr><tr><td>Long section: Waterway invert with peak flood level (m AHD) at key locations</td><td>Compare to existing</td><td></td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td>Tabulate: Peak flood level (m AHD) at key locations</td><td>Compare to existing</td><td></td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr><tr><td>Map: Peak flood velocity and identify key points</td><td>Compare to existing</td><td></td><td></td><td>✓</td><td></td><td></td><td></td></tr><tr><td>Map: Flood hazard</td><td>Compare to existing</td><td></td><td>✓</td><td>✓</td><td>✓</td><td>✓</td><td>✓</td></tr></table>	Model	Existing case	Developed case	Calibration and validation	Typical required design events *					5% &/or 10% AEP	1% AEP	0.5% AEP	0.2% AEP	PMF	Hydrology	Map: Catchment and subcatchment areas, site and hydrologic and hydraulic controls	Identify any changes in flowpaths, flow entry or discharge points							Map: Model parameterisation	Highlight any differences							Plot: Storm events examined highlighting events selected for hydraulic modelling	Highlight any differences		✓	✓	✓	✓	✓	Plot: Hydrographs at gauge locations, site boundaries and hydraulic controls	Compare to existing	✓	✓	✓	✓	✓	✓	Tabulate: Critical storm durations for different aspects selected for hydraulic modelling	Compare to existing		✓	✓	✓	✓	✓	Plot: Hydrographs for key events used in hydraulics	Compare to existing	✓	✓	✓	✓	✓	✓	Hydraulics and post-processing	Map: Study area, site and hydraulic controls	Identify any changes in flowpaths, flow entry or discharge points								Map: Development site with proposed works								Site cross-sections: Showing changes due to the development (including cut/fill and vegetation)							Map: Model parameterisation	Highlight any differences							Map: Peak flood extents	Compare to existing, include properties impacted	✓	✓	✓	✓	✓	✓	Map: Peak flood depth	Compare to existing			✓				Map: Peak flood level (m AHD) and chainages for long section	Compare to existing			✓				Long section: Waterway invert with peak flood level (m AHD) at key locations	Compare to existing		✓	✓	✓	✓	✓	Tabulate: Peak flood level (m AHD) at key locations	Compare to existing		✓	✓	✓	✓	✓	Map: Peak flood velocity and identify key points	Compare to existing			✓				Map: Flood hazard	Compare to existing		✓	✓	✓	✓	✓
Model	Existing case	Developed case	Calibration and validation	Typical required design events *																																																																																																																																																										
				5% &/or 10% AEP	1% AEP	0.5% AEP	0.2% AEP	PMF																																																																																																																																																						
Hydrology	Map: Catchment and subcatchment areas, site and hydrologic and hydraulic controls	Identify any changes in flowpaths, flow entry or discharge points																																																																																																																																																												
	Map: Model parameterisation	Highlight any differences																																																																																																																																																												
	Plot: Storm events examined highlighting events selected for hydraulic modelling	Highlight any differences		✓	✓	✓	✓	✓																																																																																																																																																						
	Plot: Hydrographs at gauge locations, site boundaries and hydraulic controls	Compare to existing	✓	✓	✓	✓	✓	✓																																																																																																																																																						
	Tabulate: Critical storm durations for different aspects selected for hydraulic modelling	Compare to existing		✓	✓	✓	✓	✓																																																																																																																																																						
	Plot: Hydrographs for key events used in hydraulics	Compare to existing	✓	✓	✓	✓	✓	✓																																																																																																																																																						
Hydraulics and post-processing	Map: Study area, site and hydraulic controls	Identify any changes in flowpaths, flow entry or discharge points																																																																																																																																																												
		Map: Development site with proposed works																																																																																																																																																												
		Site cross-sections: Showing changes due to the development (including cut/fill and vegetation)																																																																																																																																																												
	Map: Model parameterisation	Highlight any differences																																																																																																																																																												
	Map: Peak flood extents	Compare to existing, include properties impacted	✓	✓	✓	✓	✓	✓																																																																																																																																																						
	Map: Peak flood depth	Compare to existing			✓																																																																																																																																																									
	Map: Peak flood level (m AHD) and chainages for long section	Compare to existing			✓																																																																																																																																																									
	Long section: Waterway invert with peak flood level (m AHD) at key locations	Compare to existing		✓	✓	✓	✓	✓																																																																																																																																																						
	Tabulate: Peak flood level (m AHD) at key locations	Compare to existing		✓	✓	✓	✓	✓																																																																																																																																																						
	Map: Peak flood velocity and identify key points	Compare to existing			✓																																																																																																																																																									
	Map: Flood hazard	Compare to existing		✓	✓	✓	✓	✓																																																																																																																																																						
10	CPHR	The discussion in Appendix B of the FIRA focuses on Lot 6, excluding all other lots within the Industrial Estate and proposes a shelter-in-place strategy. However, flood mapping indicates that access to the overall site (including Stage 1) will be cut off during a significant flood event. Therefore, emergency management planning considerations should include the entire Industrial Estate to ensure the flood risk to visitors and employees are effectively managed. CPHR highlights that, the Shelter in place guideline for flash flooding was published by the Department in January 2025. This guideline provides ten shelter-in-place considerations that the FIRA should address to assist consent authorities in determining whether shelter-in-place is an appropriate emergency management strategy for the site.	Flood	JWP	Open	<p>The flood emergency response plan (FERP) in Appendix B of the FIRA is intended to focus on Lot 6 and also be a template for application to each warehouse as specific DA's are prepared in the future.</p> <p>The new Shelter in place guideline for flash flooding (2025) has been addressed in Section 6 of the updated FIRA Report.</p>																																																																																																																																																								
11	CPHR	The FIRA should address the shelter-in-place in accordance with the Shelter in place guideline for flash flooding.	Flood	JWP	Open	<p>The new Shelter in place guideline for flash flooding (2025) has been addressed in Section 6 of the updated FIRA Report.</p>																																																																																																																																																								

12	CPHR	<p>Stage 1 and Stage 2 are not stand-alone projects and should be reported together to allow for a holistic assessment of the entire site.</p> <p>Identify any assumptions from Stage 1 that are inconsistent with the Stage 1 approval and address them through a Stage 1 modification application.</p> <p>The irrigation area shown in Plan C5220 scales as 3 ha, rather than the indicated 5.6 ha. Check the scale and clearly label the area designated for irrigation correctly. CPHR note that 600 mm/year may only be applied to large flat areas such as the pads. If batters or landscaped areas are proposed for irrigation, these areas should apply the 60% factoring required by the technical design guidelines.</p>	Stormwater	AT&L	Open	<p>The FIRA assessment has assessed flood impacts for the part of Lot 4 that extends into the area previously approved for Bulk Earthworks within Westlink Stage 1. There are no inconsistencies between the modelling assumptions underpinning Stage 1. The modelling has evolved to reflect the works now proposed under Stage 2, Lot 4 and Lot 5.</p> <p>Please refer to AT&L's RFI response package for the Irrigation Area responses.</p>
13	CPHR	<p>Provide the updated reporting and modelling to address the above.</p>	Stormwater	AT&L	Open	<p>With reference to the response to Item 12, No update to the report and modelling was necessary.</p>

APPENDIX D

WESTLINK INDUSTRIAL ESTATE, KEMPS CREEK – STAGE 2
WATER AND STORMWATER MANAGEMENT PLAN (AT&L
JANUARY 2025)

Westlink Industrial Estate, Kemps Creek

Water and Stormwater Management Plan Stage 2

ESR Development (Australia) Pty Ltd

JANUARY 2025

20-748

Commercial in Confidence

All intellectual property rights, including copyright, in designs developed and documents created by AT&L remain the property of this company. Any use made of such design or document without the prior written approval of AT&L will constitute an infringement of the rights of the company which reserves all legal rights and remedies in respect of any such infringement.

The information, including any intellectual property, contained in this proposal is confidential and proprietary to the Company. It may only be used by the person to whom it is provided for the stated purpose for which it is provided and must not be imparted to any third person without the prior written approval of the Company. The Company reserves all legal rights and remedies in relation to any infringement of its rights in respect of its confidential information.

This report has been prepared in accordance with the terms and conditions of appointment. AT&L cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

This report may be based upon information supplied by other consultants and contractors. To the extent that the report incorporates such material, AT&L takes no responsibility for any loss or damage caused by any error or omission arising from reliance on it.

Document Registration

Document Title	Westlink Industrial Estate – Civil Infrastructure & Water Management Strategy Stage 2
Document File Name	R009-06-20-748-Stage 2 Water and Stormwater Management Plan
Section	Civil
Document Author	Andrew Tweedie

Issue	Description	Date	Author	Checked	Approved
01	Issued for Review	12/09/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
02	Final Issue	28/09/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
03	Final Issue	05/10/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
04	Final Issue	13/10/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
05	Final Issue	16/08/24	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
06	Final Issue	29/01/25	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Contents

1.	Introduction.....	5
1.1.	Site Description	5
1.2.	Supporting Documentation.....	6
2.	Site Characteristics.....	7
2.1.	Existing Topography and Catchments.....	7
2.2.	Existing Drainage Lines	9
2.3.	Existing Geology	11
2.4.	Post-Development Catchment Extents.....	12
3.	Stormwater Drainage	13
3.1.	Stormwater Drainage Design Criteria	13
3.2.	Proposed Site Stormwater Drainage	13
3.3.	Trunk Drainage Infrastructure.....	13
3.4.	Downstream Culvert Hydraulics.....	15
4.	Water Management Strategy	16
4.1.	Water Management Strategy Objectives and Controls	16
4.2.	Water Management Strategy Overview	22
4.2.1.	Technical Guidance for achieving Wianamatta-South Creek stormwater management targets..	24
4.3.	Hydrological and Hydraulic Modelling.....	25
4.4.	Stormwater Quality Modelling.....	26
4.5.	Proposed Stormwater Management Measures	27
4.5.1.	Gross Pollutant Traps.....	27
4.5.2.	Detention Tanks.....	27
4.5.3.	Erosion and Sediment Basins (acting as evaporation ponds)	28
4.5.4.	Stormwater Harvesting for Irrigation.....	29
4.5.5.	Rainwater Tanks.....	29
4.5.6.	Passively Irrigated Street Trees.....	29
4.5.7.	Atlan Vortceptor Gross Pollutant Traps.....	30
4.6.	Scenario Modelling.....	31
4.7.	Performance against stormwater quality targets.....	33
4.8.	Performance against stormwater quantity targets	34
4.9.	Performance against stormwater runoff volume targets	35
4.10.	Ongoing Management and Maintenance	36
5.	Site Water Balance	37
5.1.	Water Balance Overview.....	37
5.2.	Water Requirements	37
5.3.	Water Sources.....	37
5.4.	Water Use Minimisation.....	37
6.	Overland Flow Flooding.....	38
7.	Inspection and Maintenance Plan.....	40

7.1.	Maintenance and Operations.....	40
7.2.	Monitoring	41
7.3.	Reporting and Auditing.....	41
8.	Contingency Management.....	42
9.	Lifecycle Costs.....	44
9.1.	OSD Basin.....	44
9.2.	Proprietary Stormwater Treatment Devices	45
9.3.	Pumping and Landscape Irrigation System	45
APPENDIX 1 – CIVIL DRAWINGS.....		
APPENDIX 2 – STORMWATER HYDROLOGY SUMMARY		
APPENDIX 3 – INSPECTION, MAINTANCE AND OPERATIONS GUIDELINES.....		

Figures

Figure 1: Site Extent (imagery from nearmap, dated 17 February 2022).....	5
Figure 2 - Estate Plan Stage 2	6
Figure 3: Catchment extents under existing conditions.....	7
Figure 4: Topographic mapping showing drainage lines in the vicinity of the site (Source: NSW SIX Maps)	9
Figure 5: Extract of waterway mapping (CT Environmental, April 2020)	10
Figure 6: Field validated flow paths and watercourses within and downstream of the site.....	11
Figure 7: Catchment extents under proposed conditions.....	12
Figure 8: Trunk drainage infrastructure identified in the Mamre Road Precinct DCP	14
Figure 9 - Mamre Road Precinct Stormwater Scheme Plan (2024).....	15
Figure 10 - Extract from Technical Guidance.....	24
Figure 11: Post-development MUSIC model layout (Stage 2 Arrangement)	31
Figure 12: Flow duration curve for the proposed stormwater management measures.....	35
Figure 13 : Extract of flood planning land map (Penrith LEP 2010).....	38
Figure 14: 1% AEP flood depth from local catchments under existing conditions (Sydney Water, 2020)	39
Figure 15 - Lifecycle Costs from Landcom	44

Tables

Table 1: Description of internal and external catchments under existing conditions.....	8
Table 2: Response to DCP controls relating to water management	16
Table 3: Proposed water management measures under the Estate and Regional Arrangements	23
Table 4: Rainfall-runoff parameters adopted in MUSIC	26
Table 5: Stormwater quality parameters for MUSIC source nodes	27
Table 6 : Key Lot 6 Detention Tank & Reuse tank parameters and Drains model results	28
Table 7: Adopted estate-wide pond parameters.....	29
Table 8: Summary of reuse tank parameters under the Stage 2 Arrangement.....	29
Table 9: Music Modelling Catchments.....	32
Table 10: Post-development scenario land use breakdown under the Interim Arrangement	32
Table 11: Summary of MUSIC modelling results against stormwater quality targets (kg/ha/year).....	33
Table 12: Pre-development and post-development peak flow rates (Interim and Ultimate Arrangements)	34
Table 13: Summary of MUSIC model results against stormwater flow targets (Interim Arrangement)	35
Table 14 - Inspection and monitoring requirements	40
Table 15 - Contingency measures relating to operational stormwater management	42

1. Introduction

This Water and Stormwater Management Plan (WSMP) has been prepared by AT&L on behalf of ESR Australia in support of a State Significant Development Application (SSD-46983729) for the proposed development of the site located at 1030-1064 Mamre Road Aldington Road and 59-63 Abbots Road, Kemps Creek (the Site). This SSD builds on the Stage 1 approval SSD-9138102. Combined both these SSD's form the entire Westlink Industrial Park.

1.1. Site Description

The extent of the site is presented in Figure 1.



Figure 1: Site Extent (imagery from nearmap, dated 17 February 2022)

The site is located in the suburb of Kemps Creek, within the Penrith Local Government Area (LGA), and approximately 15 km south-east of the Penrith CBD and 5 km north-east of the under-construction Western Sydney Airport. The site is made up of the following allotments:

- Lots 3 and 4 DP250002 (1030-1064 Mamre Road, Kemps Creek)
- Lots 11 and 13 DP253503 (59-63 Abbots Road, Kemps Creek)

The total area of the site is approximately 53.6 hectares.

Stage 1 SSD approval contains bulk earthworks, servicing and construction of Warehouse 1 and 3. Total work area is approximately 11.72Ha.

The proposed works associated for this Stage 2 SSD application is as follows and referenced in Figure 2:

- Construction of extension of Abbots Road from Stage 1 extents to southern boundary
- Construction of Aldington Road extension to southern boundary
- Construction of private road north of Lot 6 linking Aldington Road with Abbots Road extension
- Development of Lot 6 (Bulk earthworks of Lot approved under a different application CDC AT&L Drawings 20-748 C30000 series)
- Bulk earthworks and associated retaining walls within Lots 6, 4 and Lot 5

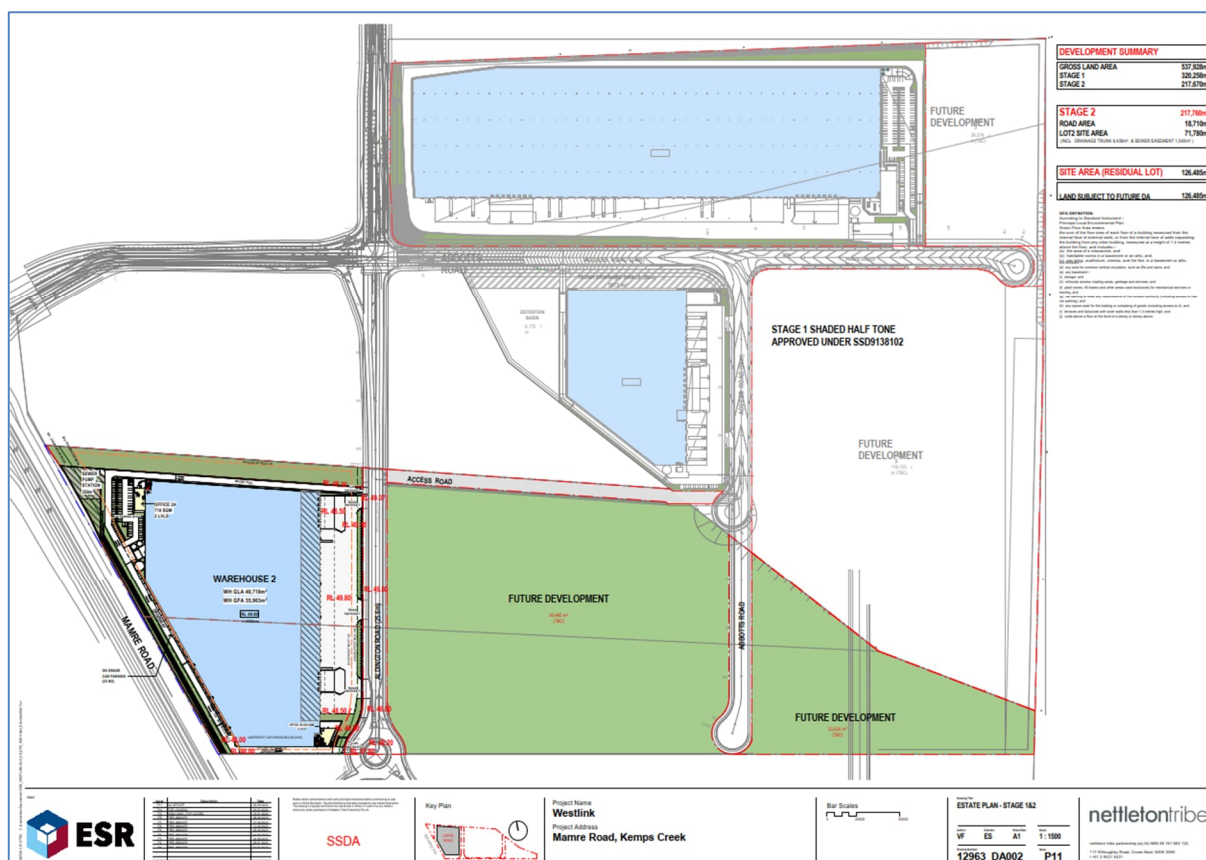


Figure 2 - Estate Plan Stage 2

The site is currently characterised as rural land and comprises residential dwellings, agricultural areas, sheds, greenhouses and some farm dams.

In June 2020, the site was rezoned *IN1 – General Industrial* under the *State Environmental Planning Policy (Western Sydney Employment Area) 2009*. The site is also located in the Mamre Road Precinct and is therefore subject to controls outlined in the *Mamre Road Precinct Development Control Plan 2021*.

1.2. Supporting Documentation

The following documentation is referred to throughout and should be read in conjunction with this report:

- Civil Drawings (AT&L), 20-748-C5000 (Infrastructure) and C6000 (on-lot) series – refer to Appendix 1.
- Stormwater Management Layout Plan 20-748-C11075 in Appendix 1
- Pre-Development hydrology parameters and assumptions letter (LTR007-02)- refer to Appendix 2
- Life Cycle Costings, and O&M Manuals from Landcom & Atlan - refer to Appendix 3
- Trunk Drainage Drawings and associated report by J.Wyndham Prince
- Westlink Industrial Estate Kemps Creek- Stage 2 flood Impact & Risk Assessment Report- Jan 2025 prepared by J Wyndham Prince

2. Site Characteristics

2.1. Existing Topography and Catchments

The Site in its existing condition is characterised by undulating topography. The ground slope across most of the site has a general fall from the east to west towards Mamre Road with existing levels ranging from RL98 in the south-east, RL 93 in the north-east, RL 42.5 in the south and west adjacent Mamre Road.

The eastern portion of the site consists of four ridgelines that are generally aligned in an east-west direction. Ground slopes off these ridgelines towards local gullies within the site are typically between 10% and 15%. The western portion of the site adjacent to Aldington Road and Abbotts Road is generally flatter than the eastern portion, with ground slopes typically in the range of between 2% and 8%.

Most of the site in its existing condition is pervious, other than some residential dwellings, sheds and access driveways.

Delineation of the existing internal drainage catchments and external catchment that drain through the site is presented as Figure 3. Note that this includes the existing conditions before the commencement of Stage 1 works.

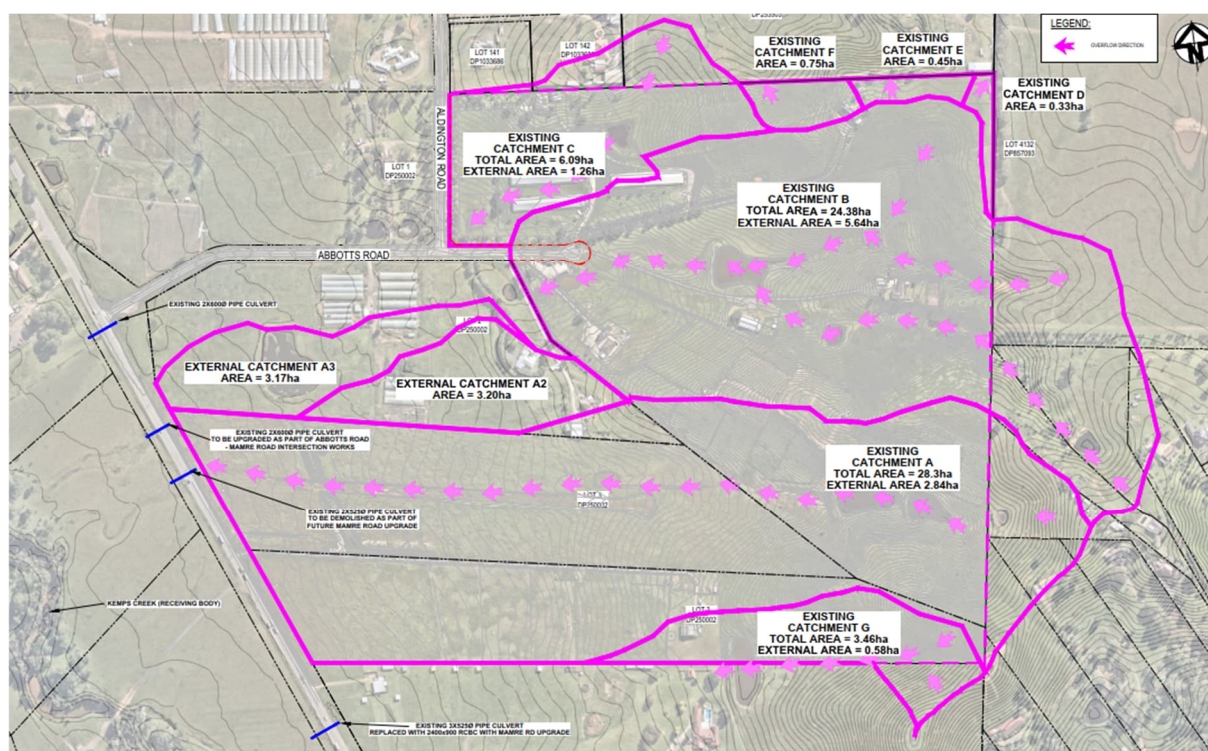


Figure 3: Catchment extents under existing conditions

A summary of the internal catchments under existing conditions is presented in Table 1.

Table 1: Description of internal and external catchments under existing conditions

Catchment ID	Area (ha)	Description
A	28.82	Discharges towards Mamre Road via residual land 1030-1064 Mamre Rd.
A2	3.20	Sheet flow into the ESR site, then joining catchment A.
A3	3.17	Sheet flow into the ESR site, and discharge from the existing farm dam, then joining catchment A.
B	24.38	Discharges towards the eastern boundary of 1016-1028 Mamre Road (Lot 2 DP250002) and ultimately into a catch drain that runs along the southern edge of Abbotts Road.
C	6.09	Discharges towards the intersection of Abbotts Road and Aldington Road.
D	0.33	Discharges in a north-easterly direction towards 19-105 Capitol Hill Drive Mount Vernon (Lot 4132 DP857093)
E	0.45	Discharges in a northerly direction towards 272 Aldington Road (Lot 15 DP253053)
F	0.75	
G	3.46	Discharges into a shared existing farm dam, which overflows into the 1066-1074 Mamre Rd property to the south.

There is currently no formal trunk stormwater infrastructure within the site.

2.2. Existing Drainage Lines

Based on large-scale topographic mapping (1:25,000 from NSW Six Maps), there is one mapped overland drainage line within the site, refer to Figure 4.

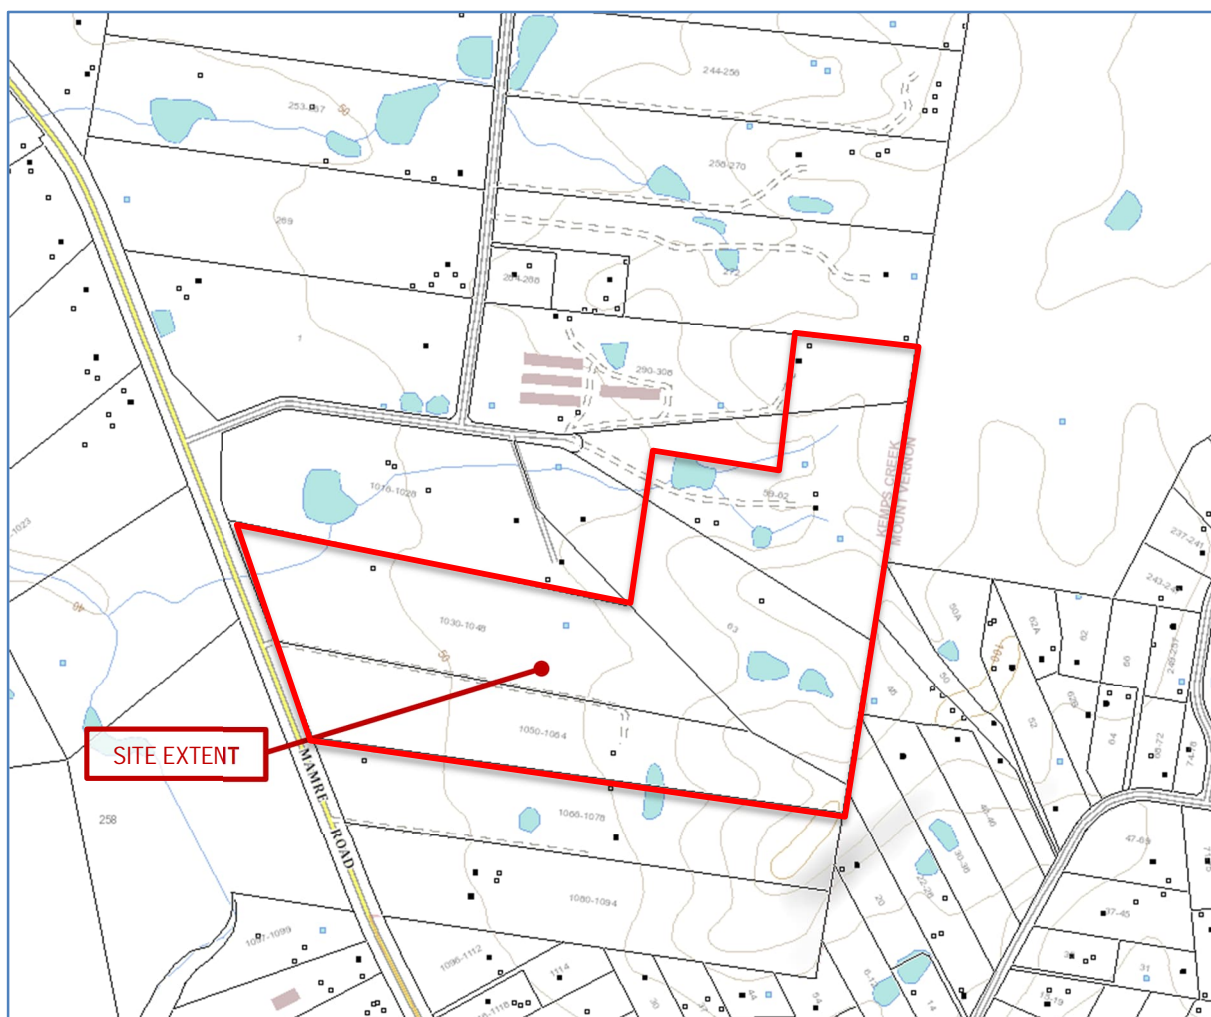


Figure 4: Topographic mapping showing drainage lines in the vicinity of the site (Source: NSW SIX Maps)

The *Mamre Road Precinct Waterway Assessment* (CT Environmental, April 2020), contained in the *Mamre Road Flood, Riparian Corridor, and Integrated Water Cycle Management Strategy* (Sydney Water, October 2020) presents the extents of waterways in the Mamre Road Precinct that have been the subject of a desktop review and field assessment to confirm the presence of mapped and unmapped waterways. An extract of mapping showing the extents of waterways in the Mamre Road Precinct is presented as Figure 5. This shows an unnamed tributary of Kemps Creek passing through the site.

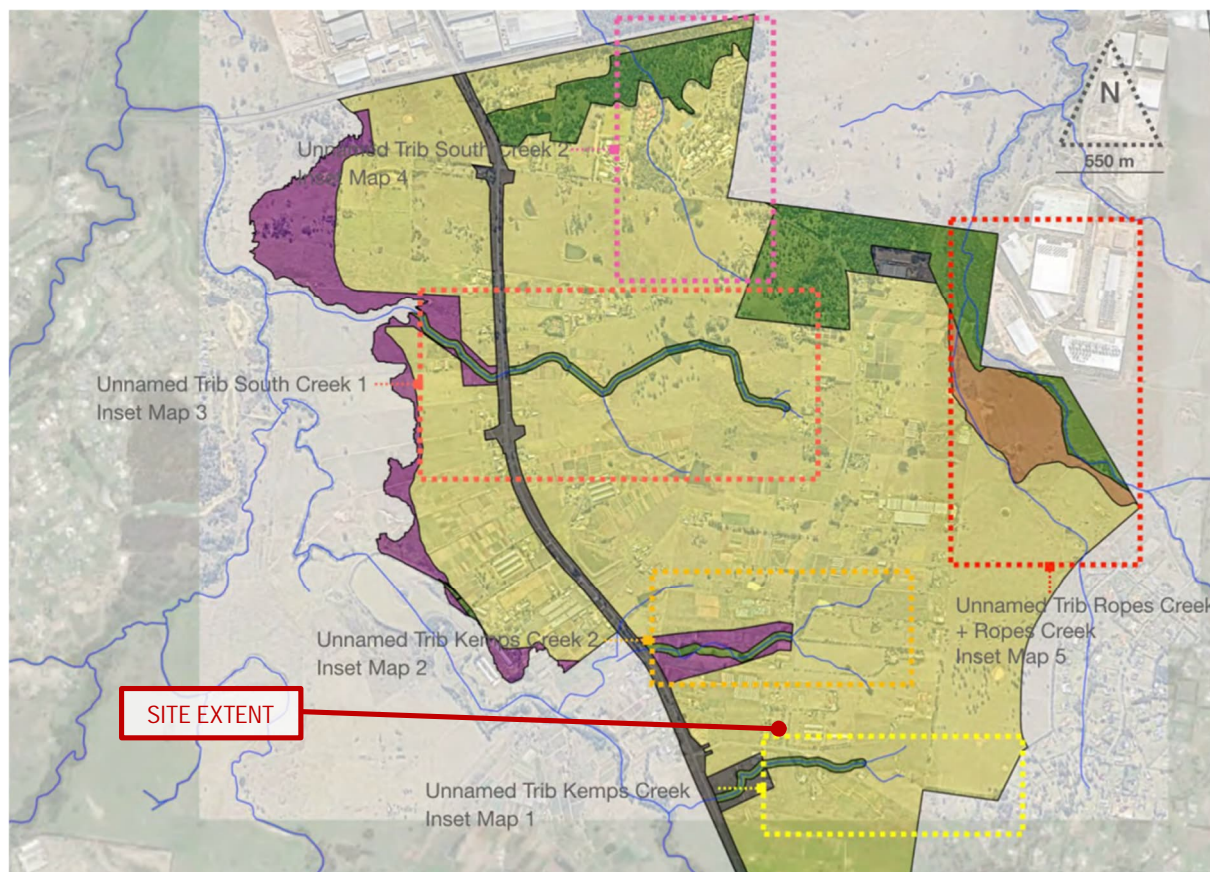


Figure 5: Extract of waterway mapping (CT Environmental, April 2020)

Results of the inspection of the unnamed tributary of Kemos Creek are described in the *Mamre Road Precinct Waterway Assessment* (CT Environmental, April 2020), and are summarised below:

- Two first order watercourses were evident in the headwaters which run to the north and south of the recently demolished house on 59-62 Abbotts Road.
- A clear flow path was evident below the confluence of the two first order watercourses, which validated the presence of a second order watercourse.
- The flow path did not have defined bed and banks, likely due to the presence of three upstream farm dams.
- From a point approximately 200 metres downstream (west) of the confluence of the first order watercourses, the flow path was observed to be heavily modified and formed into a drainage channel that runs parallel to and on the southern side of Abbotts Road. The flow path continues to Mamre Road.
- The section of mapped watercourse downstream of the Westlink Industrial Estate Stage 1, and passing through Stage 2, was not present, refer to Figure 6.
- Due to the lack of vegetation along the upper section of the headwater and significant modification to the drainage channel in the lower section, the watercourse had minimal ecological value.



Figure 6: Field validated flow paths and watercourses within and downstream of the site

2.3. Existing Geology

Based on the Preliminary Geotechnical Investigation undertaken by Douglas Partners (reference: 92352.00, dated August 2019) for 59-63 Abbotts Road and the Geotechnical Investigation Report prepared by Alliance Geotechnical (reference: 9687-GR-1-1, dated October 2019) for 290-308 Aldington Road, the following inferred sub surface soils were encountered across the site:

- TOPSOIL / topsoil filling to depths of 0.1 - 0.6m
- FILL to depths of 2.3m over parts of the site
- Residual Soil – variably stiff to hard silty clay, to depths in the range 2.5-3.5m
- BEDROCK - initially extremely low to very low strength shale or sandstone at first contact at depths of 0.7

2.4. Post-Development Catchment Extents

A post-development catchment plan based on the proposed site grading is presented as Figure 7.

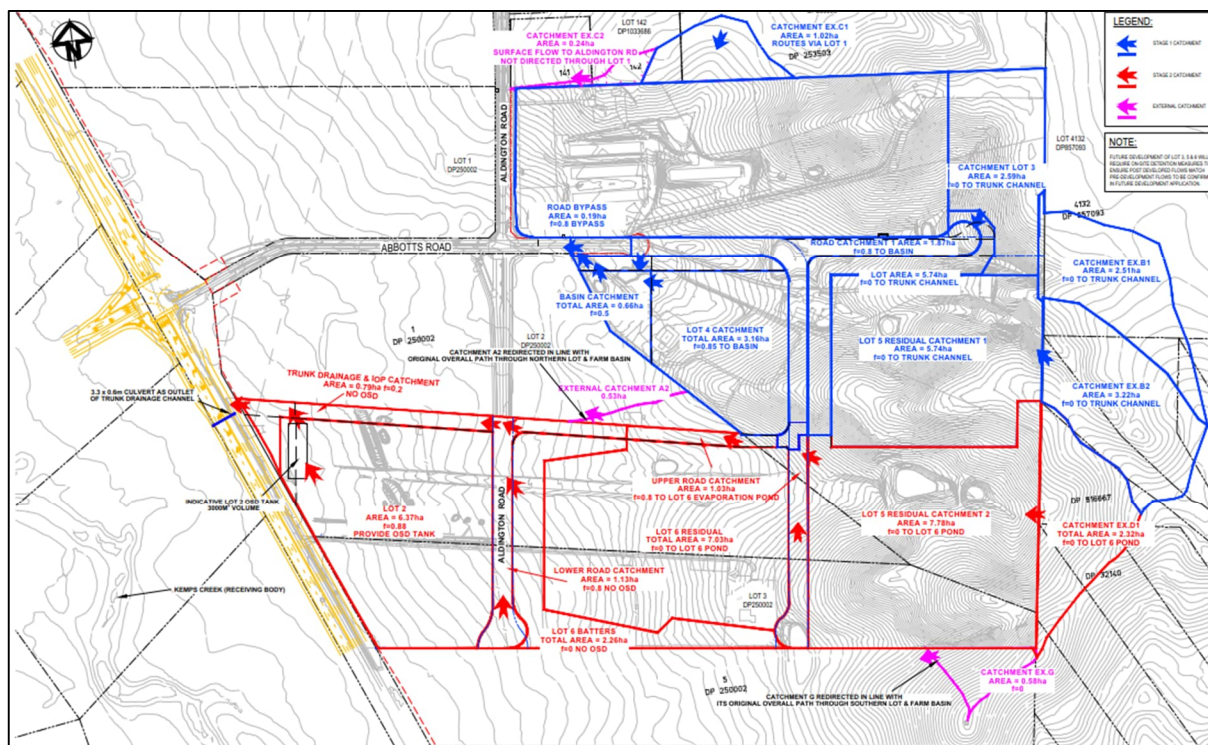


Figure 7: Catchment extents under proposed conditions

The post developed catchment extents are proposed to drain to the existing culvert beneath Mamre Road in the northwest corner of Stage 2 site as per Figure 7. It is noted the existing culverts beneath Mamre Road are scheduled to be completed in advance of the Westlink stage 2 development.

Prior to draining through the culvert beneath Mamre Road, the Stage 2 catchment is proposed as such:

- The Trunk Drainage & Sewer IOP easements bypass all OSD and treatment, draining directly into the downstream culvert
- Developed Lot 6 (western Lot) – drains via a proposed underground OSD tank with orifice outlet and proprietary treatment within the western portion of the lot to drain into the 19.2m open trunk drainage channel along the north of Lot 6
- Lots 5 and southern half of Lot 4 (both bulk surface only), and the southern portion of Abbotts Road to drain into an evaporation pond on Lot 5, then discharging into the open trunk drainage channel via GPT unit.
- The lower road catchment including Aldington Rd and a number of batters from lot 5 drain into the trunk drainage channel via a GPT unit.
- Lot 2 and northern portion of Lot 4 (both bulk surface only) to drain into the stage 1 trunk drainage channel (as per the Stage 1 stormwater management plan)
- Undeveloped External catchment to east to drain via lot 5 as surface flows.

Once Lot 4 and Lot 5 and the eastern external catchments are developed, detention and gross pollutant treatment measures within each site will be required to be implemented to ensure peak post flows into the open channel do not exceed the pre-developed flows and quality requirements. This will need to be determined as part of the Development Applications on each of these lots. As such the open trunk drainage channel is designed for pre-developed flow rates.

3. Stormwater Drainage

3.1. Stormwater Drainage Design Criteria

Design criteria and requirements for the proposed site stormwater management and stormwater drainage are outlined in the following documents:

- AS 3500.3 – Plumbing and drainage – Stormwater drainage
- Commonwealth of Australia (Geoscience Australia), *Australian Rainfall and Runoff: A guide to flood estimation*, 2019.
- NSW Department of Planning, Industry and Environment (DPIE), *Mamre Road Precinct Development Control Plan 2021*.
- NSW Department of Planning, Industry and Environment (DPIE), *MUSIC Modelling Toolkit – Wianamatta*, 2 August 2021.
- Penrith City Council, *Design Guidelines for Engineering Works for Subdivisions and Developments*, as amended 20 November 2013.
- Penrith City Council, *Water Sensitive Urban Design (WSUD) Policy*, December 2013.
- Penrith City Council, *WSUD Technical Guidelines*, Version 4 – October 2020.

3.2. Proposed Site Stormwater Drainage

The proposed drainage network within the estate has been designed to safely convey major and minor flows prior to discharging to neighbouring properties to the south and west. The following criteria have been adopted for the proposed drainage system:

- Major system (pit and pipe network, overland flow paths and channels): 1% AEP
- Minor system (pit and pipe network): minimum 5% AEP and increased where required to address major system design requirements.
- Flood Impacts from external catchments are to be minimised to an acceptable level for all floods up to the PMF.

The minor system stormwater drainage has been designed to drain towards the culvert crossing beneath Mamre Road in the northwest corner of the site. Limited road overland flow paths discharge into the southern property or Mamre Rd verge when exceeding the minor drainage system capacity.

3.3. Trunk Drainage Infrastructure

The *Mamre Road Precinct DCP* includes indicative locations of trunk drainage infrastructure across the precinct, refer to Figure 8. A 25m trunk drainage line is situated within the ESR Westlink Stage 2 site, which would drain in a westerly direction to Mamre Road. J. Wyndham Prince (JWP) has investigated the hydraulics and spatial design of the open trunk drainage channel in stage 2.

Confirmation has been received in discussions with Sydney Water in August 2023 that the naturalized trunk drainage channel within the development can be reduced in width from 25m (as per the Precinct DCP) to 19.2m and length to solely be located along the northern boundary between the Aldington Road extension at the east and Mamre Road to the west.

As such all documentation refers to the naturalized trunk drainage channel being 19.2m wide. This open channel is to form the naturalized trunk drainage network as per the DCP and the Mamre Road Precinct Stormwater Scheme Plan (Figure 8). Refer to JWP Channel Drawings for location and extents of open trunk drainage channel.

At the time of writing this report there is no detailed design of this stormwater naturalized trunk drainage channel provided by SWC to the west of Mamre Road and into the proposed Regional Wetland 17 as indicated in Figure 9 – Mamre Road Precinct Stormwater Scheme Plan.

It is assumed construction of the open trunk drainage channel within the Westlink Estate will occur prior to construction of the Regional Wetland and associated channel west of Mamre Road. As such outlet flows into the culvert beneath Mamre Road will be modelled to ensure pre-developed peak flows are not exceeded and existing flow paths west of Mamre Road are maintained.

The future downstream culvert as part of the Mamre Road upgrade is understood to be capable of conveying the entire Westlink Estate stage 2 catchment at pre-developed flows (but excludes the external catchments). The culvert requires re-alignment to the updated trunk drainage alignment. This has been formally accepted by Sydney Water. Design of the culvert as part of the Aldington/Abbotts Rd Intersection upgrade is still underway and may be updated prior to construction of Stage 2, however, they will maintain the Sydney Water culvert design including flow rates.

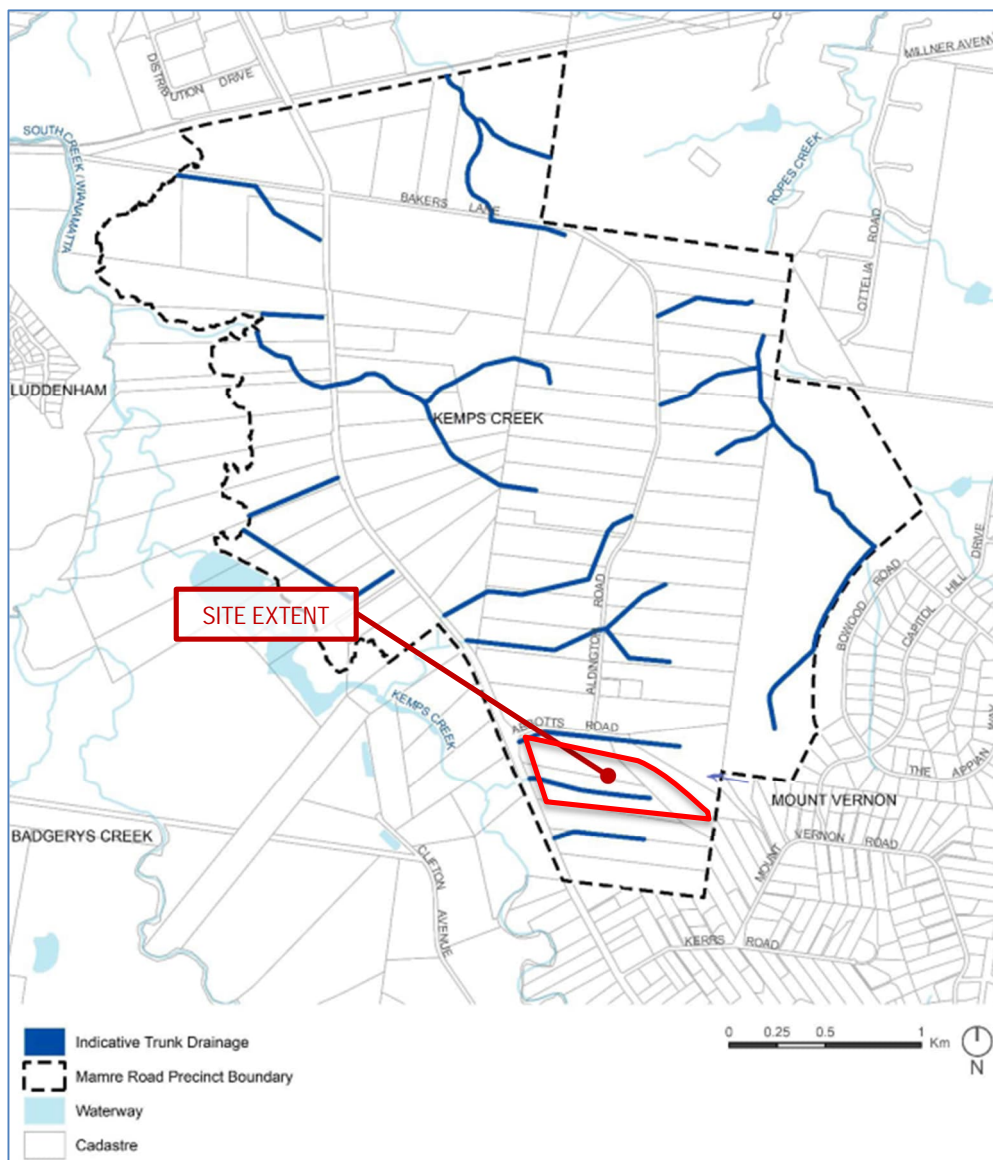


Figure 8: Trunk drainage infrastructure identified in the Mamre Road Precinct DCP

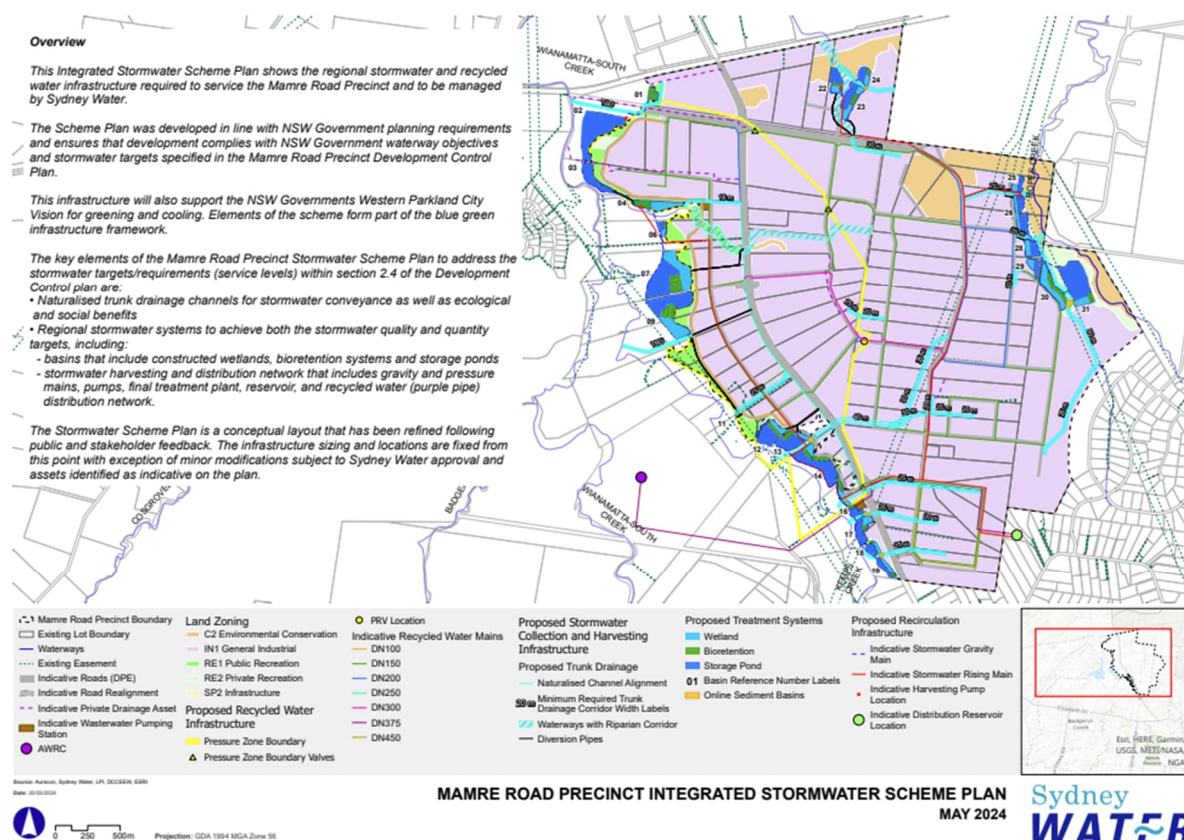


Figure 9 - Mamre Road Precinct Stormwater Scheme Plan (2024)

3.4. Downstream Culvert Hydraulics

As of January 2025, the downstream culvert from the stage 2 open channel (at Mamre Road) is still in the detailed design process with TfNSW. It is understood that the culvert sizing is a 0.75m x 3.3m culvert at IL41.788 has been assumed. This provides a 1% AEP tailwater level for design of RL 43.13 at the Lot 6 outlet (as per JWP flood modelling).

4. Water Management Strategy

This section summarises the proposed water management strategy for the site, including details of the proposed stormwater management measures and characterisation of water quality, quantity and flow volume at the points of discharge at the site boundary against the controls outlined in the Mamre Road Precinct DCP.

4.1. Water Management Strategy Objectives and Controls

The main objectives pertaining to the management of stormwater within the proposed development site are outlined in Section 2.4 of the Mamre Road Precinct DCP. Controls relating to stormwater quantity management and the requirement to attenuate peak flow rates are outlined in Section 2.5 of the DCP.

Specific controls relating to water management, as well as a response to these controls, is summarised below in Table 2.

Table 2: Response to DCP controls relating to water management

DCP Controls	Response
<i>Waterway health and Water Sensitive Urban Design</i>	
<i>1) Development applications must demonstrate compliance with the stormwater quality targets in Table 4 (DCP) and the stormwater flow targets during construction and operation phases in Table 5 (DCP) and Table 6 (DCP) at the lot or estate scale to ensure the NSW Government's waterway objectives (flow and water quality) for the Wianamatta-South Creek catchment are achieved (see Appendix D). Where the strategy for waterway management is assessed at an estate level, the approval should include for individual buildings within the estate, which may be the subject of future applications.</i>	<p>Performance of the proposed water management strategy against the stormwater quality targets is presented in Section 4.2.</p> <p>Performance against the construction phase stormwater flow & quality targets is shown indicatively in plan 20-748-C5201 noting that contractors are to create their own plan detail for construction. A CPESC has revised the plan and confirms the detail in the documentation is sufficient for the SSD.</p> <p>Performance of the proposed water management strategy against the operational stormwater flow targets is presented in Table 13, which includes measures for Lot 6 Warehouse under the interim arrangement. The strategy is also demonstrated on plan 20-748-C5220.</p>
<i>2) The stormwater flow targets during operation phase (Table 5) include criteria for a mean annual runoff volume (MARV) flow-related option and a flow duration-related option. Applicants must demonstrate compliance with either option.</i>	<p>Performance of the proposed water management strategy against the operational stormwater flow targets is presented in Table 13. Option 1 has been satisfied.</p>
<i>3) Development applications must include a Water Management Strategy (WMS) detailing the proposed Water Sensitive Urban Design (WSUD) approach, how the WMS complies with stormwater targets (i.e., MUSIC modelling), and how these measures will be implemented, including ongoing management and maintenance responsibilities. Conceptual designs of the stormwater drainage and WSUD system must be provided to illustrate the functional layout and levels of the WSUD systems to ensure the operation has been considered in site levels and layout.</i>	<p>The Water Management Strategy for the site is outlined in Section 4, and includes the approach to WSUD for the site, performance of the proposed stormwater management measures against the DCP targets, and description of delivery, ongoing management and maintenance of each proposed measure.</p> <p>Design drawings showing the layout and levels of the proposed stormwater management elements are included in the AT&L civil package.</p>
<i>4) The design and mix of WSUD infrastructure shall consider ongoing operation and maintenance. Development applications must include a detailed</i>	<p>Ongoing management and maintenance considerations are addressed in Section 4.10.</p>

DCP Controls	Response
<i>lifecycle cost assessment (including capital, operation/maintenance, and renewal costs over 30 years) and Maintenance Plan for WSUD measures.</i>	All costs associated with the delivery, operation and maintenance of the estate-based water management measures will be borne by the proponent.
<i>5) WSUD infrastructure may be adopted at a range of scales (i.e., allotment, street, estate, or sub-precinct scale) to treat stormwater, integrate with the landscape and maximise evaporative losses to reduce development flow runoff. Vegetated WSUD measures, naturalised trunk drainage and rainwater/stormwater reuse are preferred. Acceptable WSUD measures to retain stormwater within the development footprint and subdivision are shown in Table 7 (DCP).</i>	A summary of the proposed WSUD infrastructure adopted in the water management strategy is presented in Table 3.
<i>6) Development must not adversely impact soil salinity or sodic soils and shall balance the needs of groundwater dependent ecosystems.</i>	Refer to Geotechnical Investigation Reports prepared by Douglas Partners (for 59-63 Abbotts Road) and Alliance Geotechnical (for 290-308 Aldington Road) for details of soil salinity, sodicity and groundwater.
<i>7) Infiltration of collected stormwater is generally not supported due to anticipated soil conditions in the catchment. All WSUD systems must incorporate an impervious liner unless a detailed Salinity and Sodicity Assessment demonstrates infiltration of stormwater will not adversely impact the water table and soil salinity (or other soil conditions).</i>	The proposed water management strategy does not incorporate infiltration of collected stormwater.
<i>8) Where development is not serviced by a recycled water scheme, at least 80% of its non-potable demand is to be supplied through allotment rainwater tanks.</i>	Refer to Section 4.5.5 for details of proposed rainwater tanks and demand statistics.
<p><i>9) Where a recycled water scheme (supplied by stormwater harvesting and/or recycled wastewater) is in place, development shall:</i></p> <ul style="list-style-type: none"> ■ <i>Be designed in a manner that does not compromise waterway objectives, with stormwater harvesting prioritised over reticulated recycled water;</i> ■ <i>Bring a purple pipe for recycled water to the boundary of the site, as required under Clause 33G of the WSEA SEPP. Not top up rainwater tanks with recycled water unless approved by Sydney Water; and</i> ■ <i>Design recycled water reticulation to standards required by the operator of the recycled water scheme.</i> 	<p>Stormwater harvesting in the form of rainwater tanks on proposed Lot 6 will not be incorporated.</p> <p>Refer to Section 4.5.5</p>
Trunk Drainage Infrastructure	

DCP Controls	Response
10) Indicative naturalised trunk drainage paths are shown in Figure 4 (DCP)	Reproduced in this report for context as Figure 8.
<p>11) Naturalised trunk drainage paths are to be provided when the:</p> <ul style="list-style-type: none"> ■ Contributing catchment exceeds 15ha; or ■ 1% AEP overland flows cannot be safely conveyed overland as described in Australian Rainfall and Runoff – 2019; <p>unless otherwise agreed by the consent authority.</p>	<p>Details of the proposed trunk drainage infrastructure are included in Section 3.3.</p>
12) The design and rehabilitation of naturalised trunk drainage paths is to be generally in accordance with NRAR requirements (refer to Section 2.3) that replicates natural Western Sydney streams. An example of a naturalised trunk drainage path is shown in Figure 3.	<p>Based on discussions with Sydney Water there is no detailed design on the naturalised trunk channel downstream of the Estate. It is proposed at detailed design to coordinate with Sydney Water on the design and rehabilitation of the naturalised trunk drainage channel to match into any downstream open channels. This must also be co-ordinated with TfNSW for the culvert connection across Mamre Road.</p>
<p>13) Naturalised trunk drainage paths shall be designed to:</p> <ul style="list-style-type: none"> ■ Contain the 50% AEP flows from the critical duration event in a low flow natural invert; ■ Convey 1% AEP flows from the critical duration event with a minimum 0.5m freeboard to applicable finished floor levels and road/driveway crossings; and ■ Provide safe conveyance of flows up to the 1% AEP flood event. 	<p>The alignment of the naturalised trunk drainage has been altered with the approval of Sydney Water. The naturalised trunk drainage path is now along the northern boundary of Lot 6 which was deemed to not compromise the objectives of the trunk drainage, while assisting in preferred layouts of the industrial development.</p> <p>As described above, trunk drainage infrastructure in the form of a 19.2m wide open channel along the northern boundary between Aldington Road extension and Mamre Road is proposed as the naturalised trunk drainage path.</p> <p>This system will have sufficient capacity to capture and convey flows up to or exceeding the 1% AEP design event. Refer to JWP drawings for further detail.</p>
<p>14) Where naturalised trunk drainage paths traverse development sites, they may be realigned to suit the development footprint, provided that they:</p> <ul style="list-style-type: none"> ■ Comply with the performance requirements for flow conveyance and freeboard; ■ Are designed to integrate with the formed landscape and permit safe and effective access for maintenance; ■ Do not have adverse flood impacts on neighbouring properties; and ■ Enter and leave the development site at the existing points of flow entry and exit. 	<p>The proposed trunk drainage lines within the site will (as per the J. Wyndham Prince Design):</p> <ul style="list-style-type: none"> ■ Comply with requirements for flow conveyance and freeboard. ■ Incorporate sufficient access points for maintenance – maximum spacing of pits will not exceed 75 metres, which is consistent with Penrith City Council's <i>Design Guidelines for Engineering Works for Subdivisions and Developments</i> (considered an appropriate reference in the absence of any specific Sydney Water guideline or standard). ■ Have sufficient capacity to capture and convey flow from the external catchments to the east of the Westlink Industrial Estate, and

DCP Controls	Response
	will therefore not result in adverse flood impacts on neighbouring properties
<p><i>15) Trunk drainage paths shall remain in private ownership with maintenance covenants placed over them to the satisfaction of Council (standard wording for positive covenants is available from Council). Easements will also be required to benefit upstream land.</i></p>	<p>The proposed trunk drainage channel will be located in private lands considered part of Lot 6 gross land area.</p> <p>Maintenance covenants over the trunk drainage channel and easements over public stormwater infrastructure located within private lands will be incorporated in the deposited plans prepared by a Registered Surveyor.</p>
<p><i>16) Where pipes/ culverts are implemented in lieu of naturalised trunk drainage paths, they must remain on private land and not burden public roads, unless otherwise accepted by Council.</i></p>	<p>Not applicable as pipe/culverts are not proposed as part of the trunk drainage. Open channel drainage is proposed which will be situated within private lands and not within public road reserve. The downstream culvert design is as part of Mamre Rd works.</p>
<p><i>17) High vertical walls and steep batters shall be avoided. Batters shall be vegetated with a maximum batter slope 1V:4H. Where unavoidable, retaining walls shall not exceed 2.0m in cumulative height.</i></p>	<p>Batters at maximum 1:4 slope are incorporated across the Estate however given the existing sloping topography of the site along with proposed "flat" pads for industrial warehouses (as the estate is zoned for) retaining walls are unavoidable. Tiered walls as per the Mamre Rd DCP are proposed when adjacent to public roads. Refer Civil Drawings.</p>
<p><i>18) Raingardens and other temporary water storage facilities may be installed online in naturalised trunk drainage paths to promote runoff volume reductions.</i></p>	<p>Not applicable to the Westlink Industrial Estate as proposed.</p>
<p><i>19) Subdivision and development are to consider the coordinated staging and delivery of naturalised trunk drainage infrastructure. Development consent will only be granted to land serviced by trunk drainage infrastructure where suitable arrangements are in place for the delivery of trunk infrastructure (to the satisfaction of the relevant Water Management Authority).</i></p>	<p>The proposed trunk drainage infrastructure will be staged and delivered commensurate with the staging of earthworks and infrastructure across the estate.</p> <p>The trunk drainage infrastructure will form a critical component of the site water management strategy throughout construction and will be incorporated into the Erosion and Sediment Control Plan and Construction Environmental Management Plan.</p> <p>The final form of the trunk drainage lines, including connections to infrastructure downstream of the Westlink Industrial Estate, will be undertaken at a suitable stage of development and will be subject to further consultation with the Sydney Water (the nominated Waterway Manager).</p>

DCP Controls	Response
20) Stormwater drainage infrastructure, upstream of the trunk drainage, is to be constructed by the developer of the land considered for approval.	All stormwater drainage upstream of the proposed trunk drainage lines will be designed and delivered by the proponent.
21) All land identified by the Water Management Authority as performing a significant drainage function and where not specifically identified in the Contributions Plan, is to be covered by an appropriate "restriction to user" and created free of cost to the Water Management Authority.	Noted – subject to further consultation with Sydney Water (the nominated Waterway Manager).
22) All proposed development submissions must clearly demonstrate via 2-dimensional flood modelling that: 1) Overland flow paths are preserved and accommodated through the site; 2) Runoff from upstream properties (post development flows) are accommodated in the trunk drainage system design; 3) Any proposed change in site levels or drainage works are not to adversely impact and upstream or downstream, or cause a restriction to flows from upstream properties; 4) There is no concentration of flows onto an adjoining property; and 5) No flows have been diverted from their natural catchment to another.	Refer to Flood Impact & Risk Assessment Report prepared by J Wyndham Prince
Overland Flow Flooding	
10) Development should not obstruct overland flow paths. Development is required to demonstrate that any overland flow is maintained for the 1% AEP overland flow with consideration for failsafe of flows up to the PMF.	The proposed major and minor system drainage has been designed such that development within the estate will not obstruct any overland flow paths. Suitable allowance for overland flow has been made within the design of the major and minor system. Any future development in the external catchments must be attenuated to this flow regime. The flood impact assessment will address storms above the 1% AEP.
11) Where existing natural streams do not exist, naturalised drainage channels are encouraged to ensure overland flows are safely conveyed via vegetated trunk drainage channels with 1% AEP capacity plus 0.5m freeboard. Any increase in peak flow must be offset using on-site stormwater detention (OSD) basins.	Refer to Section 3.3 for details of the proposed trunk drainage infrastructure. While the existing conditions show overland flows primarily as sheet flows, the developed case concentrates into the naturalised trunk drainage system. For stage 2 development, the OSD on Lot 6

DCP Controls	Response
	is overcompensating for bypassing roads such that peak flows are below pre-development levels.
<i>12) OSD is to be accommodated on-lot, within the development site, or at the subdivision or estate level, unless otherwise provided at the catchment level to the satisfaction of the relevant consent authority.</i>	The location of the proposed detention tank within Lot 6 is presented on drawing 20-748-C5071. On site detention is provided on an estate level, not an allotment level, however future lot 4 and lot 5 will require OSD to be provided on-lot.
<i>13) Stormwater basins are to be located above the 1% AEP.</i>	No stormwater basins are proposed as part of this SSD.
<i>14) Post-development flow rates from development sites are to be the same or less than pre-development flow rates for the 50% to 1% AEP events.</i>	The performance of the proposed site post developed flows against the stormwater quantity targets in the Mamre Road Precinct DCP is summarised in Table 12
<i>15) OSD must be sized to ensure no increase in 50% and 1% AEP peak storm flows at the Precinct boundary or at Mamre Road culverts. OSD design shall compensate for any local roads and/or areas within the development site that does not drain to OSD.</i>	As demonstrated in Table 12, the proposed detention tank and outlet from the open channel has been sized to ensure no increase in peak flows at the discharge point from the estate. J Wyndham Prince flood modelling. The Lot 6 OSD tank overcompensates for bypassing road catchments.

4.2. Water Management Strategy Overview

Since the release of the Draft Mamre Road Precinct DCP in November 2020, AT&L has been working with several landowners in the Mamre Road Precinct, Government, other Industry Bodies, and experts in water management to resolve practical solutions that will address the stormwater flow targets that have been adopted in the final DCP.

The *Mamre Road Flood, Riparian Corridor and Integrated Water Cycle Management Report* (FRCIWCM) (Sydney Water, 2023) addresses links between waterway health, hydrology and water quality targets. The stormwater management objectives outlined in the FRCIWCM Report, which have ultimately been adopted in the Mamre Road Precinct DCP, were developed by applying the *Risk-based Framework for Considering Waterway Health Outcomes in Strategic Land-use Planning Decisions* (NSW OEH, 2017). The effects-based assessment outlined in the FRCIWCM Report addressed three metrics relating to waterway health and stormwater management:

1. *Flow volume – mean annual runoff volume (MARV), measured in ML/ha/year.* The target adopted in the Mamre Road Precinct DCP is 2 ML/ha/year (revised from 1.9 ML/ha/year in the Draft DCP). The outcomes for the Westlink Industrial Estate are summarised in Section 4.9.
2. *Seasonal pulses – as shown by flow duration curves.* The targets and outcomes demonstrated by a flow duration curve under post-development conditions is presented in Section 4.9.
3. *Water quality – as indicated by stormwater pollution reduction.* The targets and outcomes demonstrated as reduction in average annual pollutant load are summarised in Section 4.7. Note that as this design contains significant natural catchment, we have adopted the concentration targets as provided in the 21/09/2022 “Technical guidance for achieving Wianamatta South Creek stormwater management targets” produced by DPE.

In the FRCIWCM, Sydney Water also discussed the potential for regional facilities to be implemented to satisfy the stormwater flow objectives for the Mamre Road Precinct. The FRCIWCM report states:

“It is noted that the most cost-effective way to achieve stormwater volume load reductions is via open water bodies and these have a maintenance implication for developers and a wildlife risk.

Through master planning of the Wianamatta South Creek precinct, it will be possible to integrate regional wetlands and water bodies and offset the need for wetlands and open water to be distributed through the Precinct on private lands.

This centralised management of water is preferable as it provides a more appropriate scale of WSUD assets for more cost-effective maintenance and management outcomes.”

The Water Management Strategy for Stage 2 has been developed to satisfy the flow targets fully without the regional solution being in place, by taking advantage of residual undeveloped land as part of the catchment area. It is important to note that for the full site (i.e. further lots becoming developed) to satisfy the flow duration and MARV requirements, the stage 2 measures may need to be altered. By the time that the future development is under assessment, it may also be the case that the regional scheme is further progressed, and these measures may be reduced or decommissioned instead. This report focuses on the “Estate” level flow duration and MARV strategies.

A summary of the proposed stormwater management measures that would be required to satisfy stormwater quality, quantity and flow controls under both the “Estate” and “Regional” Arrangements is presented in Table 3.

Table 3: Proposed water management measures under the Estate and Regional Arrangements

	Estate Arrangement (Stage 2) (prior to implementation of regional stormwater management scheme)		Regional Arrangement (with regional stormwater scheme to be operated by Sydney Water)	
Gross pollutant traps (GPTs) (refer to Section 4.5.1 for further details)	✓	GPTs with capacity for hydrocarbon and sediment removal to be installed upstream of the proposed OSD tank and open drainage channel as a pre-treatment measure for the regional stormwater management scheme. SQIDEP approved Atlan Vortceptor units have been chosen.	✓	GPTs with capacity for hydrocarbon and sediment removal to be installed upstream of the proposed detention basin and open drainage channel as a pre-treatment measure for the regional stormwater management scheme. SQIDEP approved Atlan Vortceptor units have been chosen.
Detention Tank (refer to Section 4.5.2 for further details)	✓	Required to satisfy stormwater quantity controls.	✓	Required to satisfy stormwater quantity controls.
Evaporation / Storage ponds and residual irrigation (refer to Section Error! Reference source not found. for further details)	✓	Required to satisfy interim stormwater flow controls and stormwater quality treatment.	✗	Will not be required on the basis that stormwater flow controls and stormwater quality treatment will be incorporated into the regional stormwater management scheme.

4.2.1. Technical Guidance for achieving Wianamatta-South Creek stormwater management targets

In September 2022 The Department of Planning and Environment released a *Technical guidance for achieving Wianamatta-South Creek stormwater management targets*. This guideline was prepared to give advice on modelling to undertake, assumptions to make and which data is to be used to demonstrate that the water targets are being achieved. It also provided a range of example WSUD strategies that could be utilised to meet the water quantity targets.

Refer to Figure 10 below for extract from the Technical Guidelines (page 14) which indicates typical WSUD measures which could be implemented to meet the required water quantity targets.

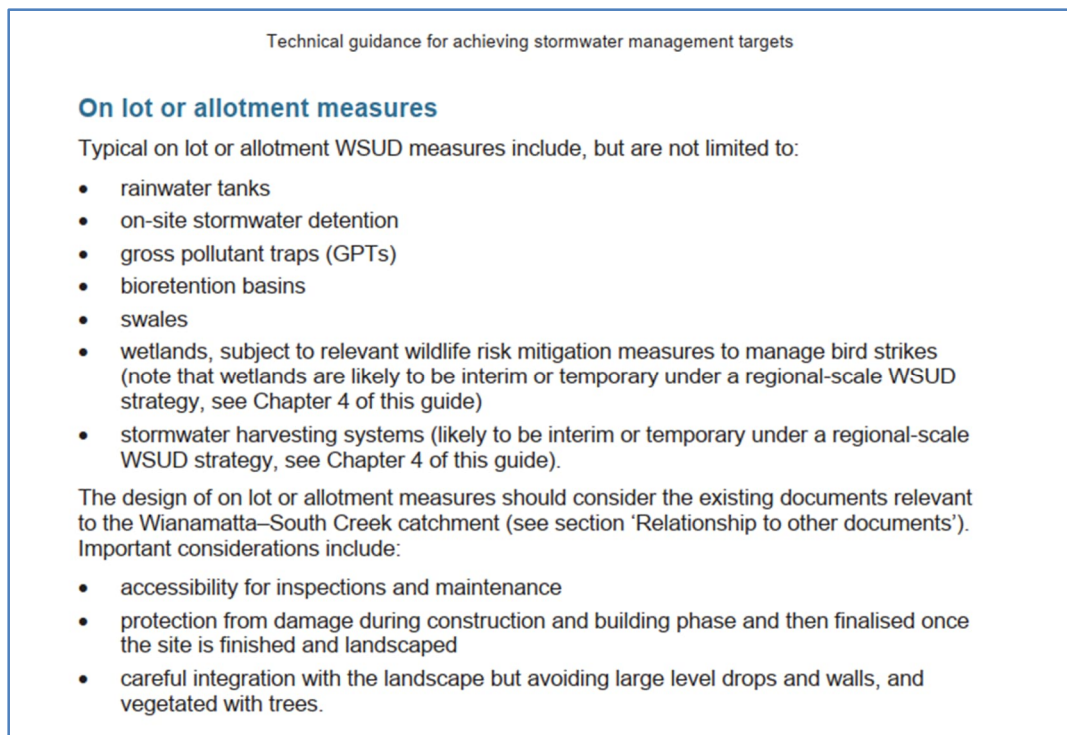


Figure 10 - Extract from Technical Guidance

For this SSD all the dot points as noted within Figure 10 aside from wetlands and bioretention basins are being incorporated into the civil design to ensure the water quantity targets are met. Refer to Section 4.5 for additional details.

4.3. Hydrological and Hydraulic Modelling

DRAINS modelling software has been used to calculate the Hydraulic Grade Line (HGL) of the proposed estate-wide stormwater network, including pits, pipes, overland flow paths and detention basins. DRAINS is a software package used for designing and analysing urban stormwater drainage systems and catchments. It is widely accepted by Council's across NSW as the basis for stormwater design and has been confirmed by Penrith City Council as the preferred stormwater software analysis package.

A summary of the key hydrological and hydraulic design parameters adopted in DRAINS to develop a major and minor system drainage design for the proposed development are as follows:

- Minor system (pit and pipe) drainage has been designed to accommodate the 5% AEP storm event.
- The combined pit and pipe drainage and overland flow paths have been designed to accommodate the 1% AEP storm event.
- Where trapped low points are unavoidable and potential for flooding private property is a concern, an overland flow path capable of carrying the total 1% AEP storm event has been provided. Alternatively, the pipe and inlet system has been upgraded to accommodate the 1% AEP storm event.
- Rainfall intensities have been adopted using the Bureau of Meteorology Design Rainfall Data System (2016).
- Times of concentration for each sub catchment have been determined using the kinematic wave equation.
- The width of flow in the gutter does not exceed 2.5 metres and pits are spaced no further than 75 metres apart.
- Velocity x depth product shall not exceed 0.4 m²/s for all storms up to and including the 1% AEP event.
- Bypass from any pit on grade shall not exceed 15% of the total flow at the pit.
- Blockage factors of 20% and 50% shall be adopted for on-grade and sag pits respectively.
- A hydraulic grade line HGL design method shall be adopted for all road pipe drainage design.
- Pipelines in roadways shall have a minimum diameter of 375mm.
- A desirable minimum grade of 1% for all pipelines is preferred for self-cleansing under low flow velocities. An absolute minimum grade of 0.5% has been adopted.
- The minimum cover over pipes shall be 450mm in grassed areas and 600mm within carriageways.
- Where minimum cover cannot be achieved due to physical constraints the pipe class shall be suitably increased.
- All pipes in trafficable areas will be Reinforced Concrete Pipes (RCP) or Fibre Reinforced Cement (FRC) equivalent.
- Pipes discharging to an overland flow path shall adopt a minimum tailwater level equivalent to respective overland flow level.
- Pit Loss coefficients have been calculated in accordance with the Hare Charts as documented in the Queensland Urban Drainage Manual.
- A minimum 150mm freeboard has been maintained between pit HGL and pit surface levels for the minor design storm event (5% AEP).
- Overland flow paths maintain a minimum of 300mm freeboard to all habitable floor levels.

4.4. Stormwater Quality Modelling

The proposed stormwater treatment train has been modelled using the MUSICX software package (Version 1.1.0). Modelling has been undertaken in accordance with the *MUSIC Modelling Toolkit – Wianamatta* (NSW DPIE, 2021).

Rainfall and evaporation data

Penrith City Council's MUSIC-link climate data (rainfall and evapotranspiration) was adopted in the MUSIC model, as well as some evapotranspiration data from the MUSIC Modelling toolkit. The meteorological data includes:

- Pluviometer data (six-minute rainfall intensity and evapotranspiration) for Penrith Lakes AWS (Station 67113) for the period between 1999 and 2008 inclusive (average annual rainfall over this period = 691mm).
- Monthly potential evapotranspiration (PET) as per the *MUSIC Modelling Toolkit - Wianamatta*.

Rainfall-runoff parameters

The rainfall-runoff parameters adopted in the MUSIC model are consistent with the parameters adopted in *MUSIC Modelling Toolkit – Wianamatta*, refer to Table 4.

Table 4: Rainfall-runoff parameters adopted in MUSIC

Parameter	Unit	Value
<i>Impervious area parameters</i>		
Rainfall Threshold	mm/day	1.0
<i>Pervious area parameter</i>		
Soil Storage Capacity	mm	150
Initial Storage	% of Capacity	30
Field Capacity	mm	130
Infiltration Capacity Coefficient α	-	175
Infiltration Capacity Coefficient β	-	2.5
<i>Groundwater properties</i>		
Initial Depth (groundwater)	mm	10
Daily Recharge Rate	%	25
Daily Baseflow Rate	%	1.4
Daily Seepage Rate	%	0.0

Source nodes and pollutant generation

Pollutant events mean concentrations (EMCs) for base flow and storm flow scenarios have been adopted from Table 6 of Blacktown City Council's WSUD developer handbook (consistent with the *MUSIC Modelling Toolkit - Wianamatta*). The EMC values are applied to source nodes in the MUSIC model to estimate annual pollutant loads exported from the site under the proposed ultimate development scenario. The adopted pollutant EMCs for various catchment types are summarised in Table 5.

Table 5: Stormwater quality parameters for MUSIC source nodes

Landuse category		log10 TSS (mg/l)		log10 TP (mg/l)		log10 TN (mg/l)	
		Base flow	Storm flow	Base flow	Storm flow	Base flow	Storm flow
Roof areas	Mean	1.20	1.30	-0.85	-0.89	0.11	0.30
	Std dev	0.17	0.32	0.19	0.25	0.12	0.19
Road areas	Mean	1.20	2.43	-0.85	-0.30	0.11	0.34
	Std dev	0.17	0.32	0.19	0.25	0.12	0.19
Pervious areas	Mean	1.20	2.15	-0.85	-0.60	0.11	0.30
	Std dev	0.17	0.32	0.19	0.25	0.12	0.19

4.5. Proposed Stormwater Management Measures

A series of stormwater quantity and quality control measures are proposed to be adopted within the site to satisfy the stormwater management strategy objectives listed in Section 4.1. A general description of the proposed stormwater treatment train components is presented in the following sections.

4.5.1. Gross Pollutant Traps

The proposed stormwater treatment train under the Interim Arrangement would consist of gross pollutant traps (GPT) upstream of the proposed OSD tank on Lot 6 and connection into open trunk drainage channel as a means of primary stormwater treatment. GPTs are designed to capture litter, debris, coarse sediment, as well as some oils and greases. All GPT's are proposed to be located within private lands with two located within Lot 6 and the other upstream (east) of the open trunk drainage channel.

A high-flow bypass for the GPTs would nominally be equivalent to the 4 EY (3-month ARI) peak flow rate discharging to the GPT. Design flows for the GPTs and their final configuration would be confirmed at the detailed design phase. Atland Vortceptor units have been uniformly chosen, as they are SQIDEP approved and providing sufficient treatment for the interim phase. Potential alternative products must be SQIDEP approved, and requires re-running of the estate wide MUSIC modelling to ensure estate level compliance.

4.5.2. Detention Tanks

Stormwater runoff from the developed Lot 6 is proposed to be collected via pits and pipes and discharge into the proposed detention tank within the north west corner of the lot. This underground tank will provide storage and with a controlled outlet structure detain all storm events up to and including the 1% AEP event. Proprietary treatment devices will be installed within the tank to ensure the stormwater nutrient targets as met to comply with the Mamre Road DCP. Part of the tank volume (excluded from OSD volume) is to be used as stormwater storage for reuse purposes. This is discussed further in section 4.5.4.

A summary of the key detention tank parameters and DRAINS model results for the major and minor system flow is presented in Table 6.

Table 6 : Key Lot 6 Detention Tank & Reuse tank parameters and Drains model results

Parameter	Unit	Lot 6 Tank
Base level	mAHD	42.44
Reuse Tank max Still Water Level	mAHD	42.94
Low Flow orifice level	mAHD	42.94
Low Flow orifice diameter	mm	310
Mid Flow orifice level	mAHD	44.30
Mid flow orifice diameter	mm	700
High flow weir crest level	mAHD	44.75
High flow weir length	mm	500
Outlet pipe diameter	mm	900dia
Outlet pipe upstream IL	mAHD	42.94
Outlet pipe downstream IL (at channel)	mAHD	42.30
Outlet pipe length	m	46m
Tank Roof Level	mAHD	45.05
Total Tank Volume	m ³	2530
Total Tank Reuse Volume	m ³	150
Total Tank OSD Volume	m ³	2380
5% AEP		
Peak Inflow	m ³ /s	2.11
Peak Outflow total	m ³ /s	0.737
Peak tank water level	mAHD	44.78
Peak tank storage	m ³	2050
1% AEP		
Peak Inflow	m ³ /s	2.87
Peak Outflow total	m ³ /s	1.31
Peak OSD water level	mAHD	45.05
Peak tank storage (excluding long term storage)	m ³	2380

4.5.3. Erosion and Sediment Basins (acting as evaporation ponds)

Ponds provide an effective means of reducing runoff volume from the site as water would be lost via evaporation over a large area. A pond can capture large quantities of stormwater runoff, while also being relatively easy to maintain.

Large-scale MUSIC modelling undertaken by AT&L indicates that, in combination with other measures, ponds can achieve a relatively high reduction of stormwater runoff volume and are generally more efficient than irrigation.

This Water Management Strategy under the Estate Arrangement (in the absence of the regional stormwater management scheme), which addresses the stormwater flow targets adopted in the Mamre Road Precinct DCP, incorporates an erosion and sediment pond within the residual pads of Lot 5, Lot 2 and the northern part of lot 4.

Table 7: Adopted estate-wide pond parameters

Parameter	Lot 5 Pad	Lot 4 Northern Pad	Lot 2 Pad
Contributing Catchment (ha)	15.86	5.75	2.72
Surface Area (m ²)	3093	1250	1258
Permanent pool volume (m ³)	5082	1881	1090
Exfiltration rate (mm/hr)	0	0	0
Evaporative loss (% of PET)	100	100	100

4.5.4. Stormwater Harvesting for Irrigation

As per the Technical guidance for achieving Wianamatta-South Creek stormwater management targets stormwater harvesting and reuse is another effective way to reduce stormwater flow volumes from frequent flows events to achieve the water quantity targets.

Water runoff from the developed Lot 6 is proposed to be stored in tank volume underneath the OSD tank volume (refer Section 4.5.2) within Lot 6 carpark. Refer to Drawing 20-748 C6121 for early layout. Water from this reuse tank will be stored and used as irrigation in the residual lot 6 pads. Refer to Table 8 for re-use details.

Refer to Drawing 20-748 C5220 for extent of residual lands to be irrigated via this basin. It is noted this basin arrangement is interim only, to be used only before the regional basins are constructed (and decommissioned when instructed by DPIE).

Table 8: Summary of reuse tank parameters under the Stage 2 Arrangement

Lot	Total Lot Area (ha)	Catchment Area of Tank (ha)	Estimated annual irrigation demand (kL/yr)	Total re-use volume required (within OSD tank) m ³
6 (Storage tank)	7.16	6.42	4000 (On Lot 6)	200

4.5.5. Rainwater Tanks

Recent discourse from Sydney Water and DPIE indicate that rainwater tanks under interim conditions, where the estate is to be connected to the future recycled mains scheme, are not desired. As such no rainwater tanks collecting runoff from the roof areas are proposed for Lot 6. It is proposed this lot with be connected to the recycled water network within Adlington Road when constructed.


4.5.6. Passively Irrigated Street Trees

Advice received from Sydney Water are that passively irrigated street trees are an important component of their Regional stormwater drainage scheme. These street trees need to be designed to the Sydney Water Stormwater Scheme Infrastructure and Council's approval.

As the time of writing this report (August 2024) it is our understanding SWC and Penrith City Council have prepared a draft design for the passively irrigated street tree (PIST) which is on exhibition for comments. Whilst no design of the PIST are including within street infrastructure of Westlink Estate as yet these trees will be incorporated into the street infrastructure design once finalised. These trees will be included within all public road reserves as per Sydney Water's requirements. The street trees are excluded from the MUSIC modelling.

4.5.7. Atlan Vortceptor Gross Pollutant Traps

Atlan Vortceptor units are specified within Lot 6 at both inlets to the OSD tank, as well as upstream of the trunk drain to treat road drainage. The Atlan Vortceptor is a SQIDEP approved GPT, so it is permitted to provide treatment in the MUSIC modelling for TN, TP, and TSS, as well as for Gross pollutants. This is sufficient to provide treatment within stage 2 without any tertiary treatment to the concentration based targets for the estate.

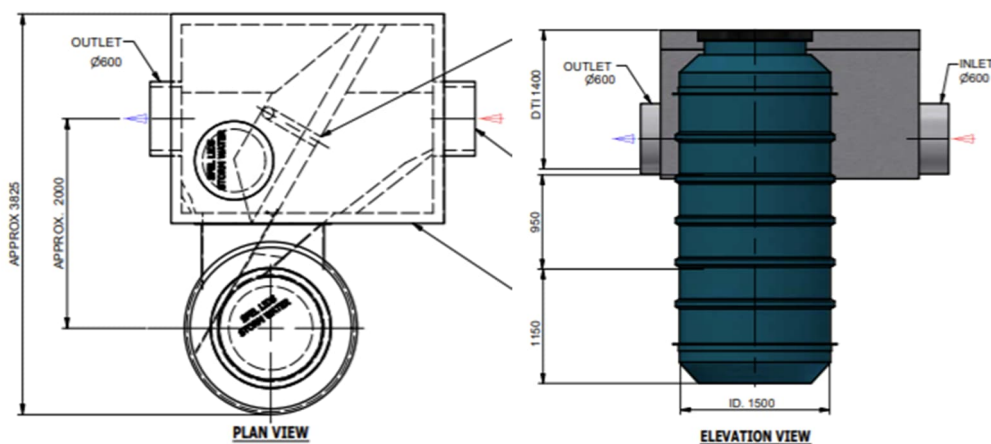

Each GPT provides a weir pit to divert low flows into the Vortceptor, with excessive flows overtopping the internal weir. The low flows are then filtered with a sump and a screen to remove the pollutants, before returning to the weir pit downstream of the weir.

The treatable flow is treated at SQIDEP approved removal rates: 100% for Gross Pollutants (GP), 93% for Total Suspended Solids (TSS), 86% for Total Phosphorous (TP) and 49% of Total Nitrogen. Each of the 3 Vortceptor units specified are the SVO.096 unit, with 96L/s of treatable flow rate.

Table 9: Music Modelling Catchments

Catchment	Total Area (ha)	Impervious Area (ha)	Pervious Area (ha)
LOT 6 70% ROOF	3.14	3.14	-
LOT 6 HARDSTAND	1.13	1.13	-
LOT 6 PERVIOUS & LANDSCAPE	0.75	-	0.75
LOT 6 30% ROOF	1.35	1.35	-
ALDINGTON RD	1.13	0.90	0.23
LOT 5 BATTER	2.28	-	2.28
RESIDUAL LOT 5 PAD	7.03	-	7.03
RESIDUAL LOT 4 SOUTH	7.83	-	7.83
ABBOTS & ACCESS RD	1.03	0.82	0.21
TRUNK DRAINAGE RESERVE + IOP	0.79	0.16	0.64
STAGE 1 AREA (APPROVED UNDER PREVIOUS SSD)	27.2		
TOTAL INTERNAL	53.66	22.11	31.55

Table 10: Post-development scenario land use breakdown under the Interim Arrangement

Catchment	Total Area (ha)	Roof area to rainwater tanks (ha)	Other impervious area (ha)	Pervious area (ha)	% Pervious area
Lot 6 (including drainage reserve)	7.16	1.35	4.43	1.39	19.4
Access Roads to Southern Trunk	2.16	-	1.73	0.43	20
Stage 2 Developed Areas	9.32	1.35	6.16	1.82	19.5
Residual catchments draining through stage 2	19.39	-	-	19.39	100

Pond area is considered impervious area.

Note: Residual and External catchments are assumed to represent existing greenfield flows and not included within the Music modelling for flow duration or stormwater quality management, as agreed with EH&G in the consultation period.

The post-development scenario model under the Interim Arrangement incorporates the following stormwater management measures:

- Pervious landscape target of 15% as per Clause 4.2.3 (4) of the Mamre Road DCP s achieved as the total % pervious area for the developed portion of Stage 2 equates to 19.5% (refer Table 10).
- Rainwater tanks, as per the parameters presented in Section 4.5.5.
- GPTs, as per the parameters described in Section 4.5.1.
- Detention tank, as per the parameters described in Section 4.5.2.
- Stormwater reuse tank for irrigation, as per the parameters presented in Section 4.5.4
- Erosion and Sediment Basin for CPESC compliance, but improving flow reduction targets,

- Landscape irrigation, at 3.0ML/ha of pervious space (600mm/year with 50% of area irrigated).
- Residual land irrigation at 6.0ML/ha (600mm/year with 100% of area irrigated)
- Baseflow from pervious residual land surfaces is assumed to drain directly to the receiving node over time (red dashed arrows in Figure 11).

The attributes for each of the proposed stormwater management measures have been determined such that they will satisfy the stormwater quality, quantity and flow targets outlined in Section 4.1.

4.7. Performance against stormwater quality targets

The “MUSIC MODELLING TOOLKIT – WIANAMATTA” Published on 20/04/2022 by DPE, supplied to “support assessments and development of proposals for State Significant Development”, provides two options for operational phase stormwater quality targets. The first option is the traditional “reduction in mean annual load from unmitigated development”, while the new Option 2 provides an allowable mean annual load. For this development, due to the high amount of residual land, the allowable mean annual load target has been selected.

MUSIC model results presented as mean annual loads per hectare per year at the receiving node indicate that the adopted stormwater quality target reductions are achieved, as shown in Table 11.

Table 11: Summary of MUSIC modelling results against stormwater quality targets (kg/ha/year)

Parameter	Proposed Layout Source Load (kg/ha/yr)	Proposed Layout Residual Load for Stage 2 (kg/ha/yr)	Target allowable Mean Annual Load (kg/ha/yr)
TSS (kg/ha/yr)	422.5	71.9	80.00
TP (kg/ha/yr)	0.88	0.204	0.30
TN (kg/ha/yr)	6.13	2.44	3.50
Gross Pollutants (kg/ha/yr)	74.10	2.44	16

The MUSIC model results presenting treatment train effectiveness shows that while the adequately satisfies the allowable mean annual loads (Option 2). Due to the large proportion of un-developed land contributing to the treatment train, the reduction targets are less feasible than in a fully developed estate assessment.

Under the Sydney Water Regional strategy, stormwater quality management measures would be incorporated into the regional stormwater management scheme to be designed, delivered and operated by Sydney Water. In this case, the Stage 1 filter cartridges, Stage 2 GPTs, residual irrigation, rainwater tanks, and storage ponds or tank volumes are expected to become redundant, with treatment targets met by Sydney Water centralised assets.

Additionally, as per the RTS comment, the MUSIC model has been run inclusive of external catchments for treatment rates only, to confirm that the treatable flow rates and water balance are not negatively affected by the additional volumes of water. Note that the “per hectare” target has not been adjusted to increase with the additional external areas. As the GPT used in stage 1 has recently been SQIDEP approved, the treatment parameters for the asset have been added to the model for this purpose of checking external catchment treatment only. The results are still within the limits required – this is a “check only” and added as an additional MUSIC model for submission. Note that these catchments have not been used in assessing the flow duration curve as per previous stage 1 advice.

4.8. Performance against stormwater quantity targets

Table 12 presents the pre-development and post development flow rates, generated by hydrologic and hydraulic modelling in DRAINS, for a range of events between and including the 50% AEP and 1% AEP design storm events at the discharge points from the site. Note that the DRAINS model incorporates the future lot 4 and lot 5 developments as 85% impervious catchments, such that the OSD is designed appropriately for the ultimate design of the development.

Table 12: Pre-development and post-development peak flow rates (Interim and Ultimate Arrangements)

Design Storm Event	Pre-Development Peak Flow Rate (m ³ /s)	Post-Development Peak Flow Rate (m ³ /s)
50% AEP	1.37	1.20
20% AEP	2.09	2.09
10% AEP	3.00	2.80
5% AEP	4.01	4.01
2% AEP	6.13	5.80
1% AEP	7.42	7.42

The DRAINS model results demonstrate that the post-development peak flow rates would be less than or equal to pre-development peak flow rates for a range of storm events between (and including) the 50% AEP and 1% AEP design events. Therefore, the stormwater drainage system and detention basins as proposed would satisfy the development controls relating to stormwater quantity management.

The Westlink Estate design flows have been derived using IL-CL methods and post development flows use ILSAX modelling to these limits. It is understood that the higher level modelling undertaken by Sydney Water uses RAFTS modelling, resulting in significantly lower pre-development peak flow rates (5.1m³/s for the 1% AEP). RAFTS is not practical or accurate for finely modelling urban catchments to the level of detail the civil design must reach. Our understanding is that while using ILSAX and IL-CL results in higher flow rates, as long as we are consistent with our internal modelling of pre-development and post-development this will be acceptable to Sydney Water. The flood modelling by J Wyndham Prince provides a like for like analysis against Sydney Water modelling showing that the development does not negatively impact the downstream catchments, regardless of the modelling method used for the urban catchments.

4.9. Performance against stormwater runoff volume targets

MUSIC model results demonstrating performance of the proposed stormwater management measures in the Interim Arrangement against the stormwater flow targets are presented below in Table 13. The resultant flow duration curve is presented as Figure 12.

Table 13: Summary of MUSIC model results against stormwater flow targets (Interim Arrangement)

Parameter	Result	DCP Target	Complies with DCP target	
			DCP Option 1 (MARV approach)	DCP Option 2 (Flow Duration Curve approach)
Mean annual runoff volume (ML/ha/yr)	2.0	2.0	Yes	n/a
95%ile flow (L/ha/day)	25,089	3000 to 15000	n/a	No
90%ile flow (L/ha/day)	4,855	1000 to 5000	Yes	Yes
75%ile flow (L/ha/day)	351	100 to 1000	n/a	Yes
50%ile flow (L/ha/day)	50	5 to 100	Yes	Yes
10%ile flow (L/ha/day)	0	0	Yes	n/a
Cease to flow	12%	10% to 30%	n/a	Yes

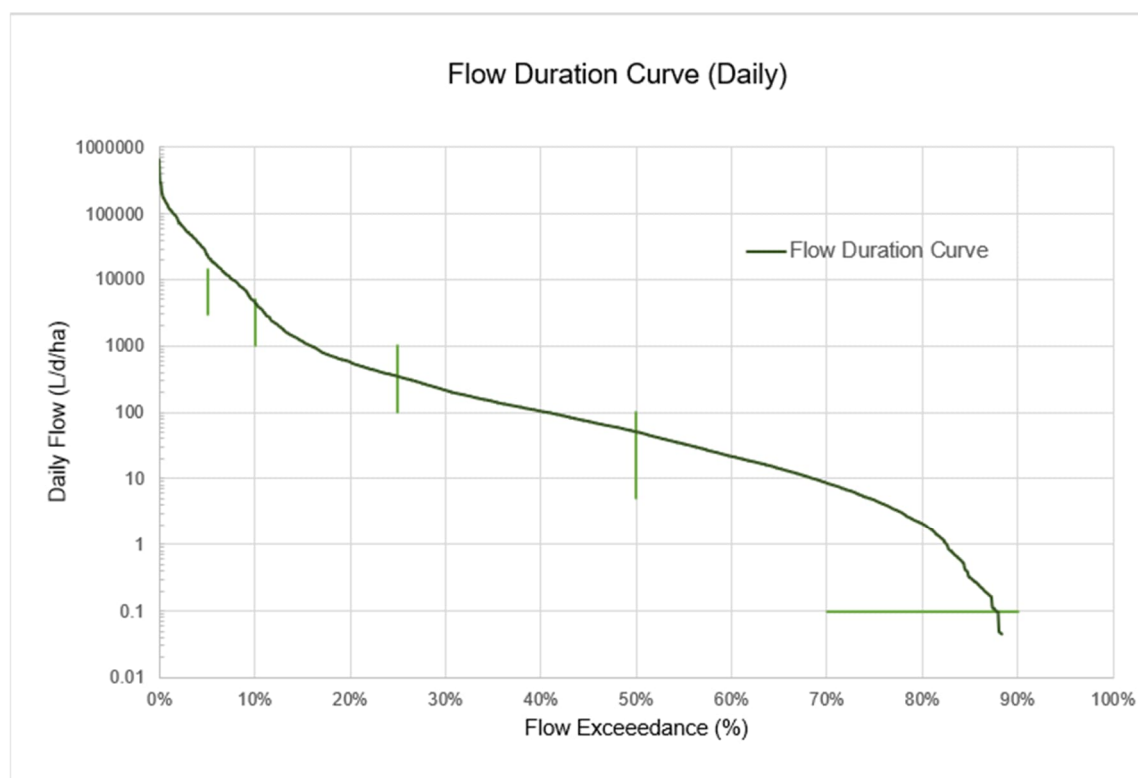


Figure 12: Flow duration curve for the proposed stormwater management measures

The results presented in Table 13 demonstrate the proposed stormwater management measures that will be implemented under the Interim Arrangement satisfy the Option 1 DCP stormwater flow targets for the site.

4.10. Ongoing Management and Maintenance

All proposed water management measures that make up the Interim Arrangement of the water management strategy would be managed and maintained by the proponent. An Inspection and Maintenance Plan will be prepared and lodged with the construction certificate for the subdivision works once final design details and the extent and layout of all proposed water management measures is confirmed. It is anticipated that the Inspection and Maintenance Plan would be prepared using current best practice guidance such as *Water sensitive urban design inspection and maintenance guidelines* (Blacktown City Council, 2019) and would describe:

- Each of the functional components of each water management measure.
- Expertise required to inspect, maintain and (where necessary) repair or replace components.
- Minimum required frequency of inspection, repair or replacement activities.
- Inspection and maintenance forms that list all necessary activities and contain a record of activities completed.

The Estate Arrangement would incorporate some estate-based measures such as on-lot rainwater tanks, GPTs and an estate-wide detention basin. These measures would be managed and maintained by the proponent, with inspection and maintenance requirements consistent with those described above. The planned regional stormwater management scheme, which would incorporate measures to manage stormwater quality and volume across the Mamre Road Precinct, would be managed and maintained by Sydney Water.

5. Site Water Balance

5.1. Water Balance Overview

Potable water supplies in the Sydney area are in recognised short supply with projected population increases, potential climate change and periods of extended drought. It is acknowledged that any development in the Sydney region places greater demand on an already limited water supply. As a result, government bodies, together with Sydney Water have encouraged sustainable development by the implementation of an integrated approach to water cycle management (potable water, sewerage, stormwater and rainwater) to minimise potable water demand and maximise the potential for non-potable water sources to replace potable water demand where possible.

With the appointment of Sydney Water as the regional Waterway Manager and the announcement of a regional stormwater management scheme, opportunities for water reuse within the Mamre Road Precinct will include regional stormwater harvesting and reticulated recycled water.

5.2. Water Requirements

Water requirements within the Westlink Industrial Estate will be typical of large format warehouses and distribution centres. Sources of demand for water within the proposed allotments and public domain will include:

- Office amenities (kitchen, bathrooms)
- Landscape irrigation
- Dust suppression (depending on end user requirements)

5.3. Water Sources

The primary source of water to the Westlink Industrial Estate will be Sydney Water's potable water reticulation network.

A "third-pipe" reticulated recycled water network will supply non-potable water throughout the Mamre Road Precinct. Non-potable water will be supplied from two sources:

- Stormwater harvested within precinct-wide wetlands / ponds, to be delivered and operated by Sydney Water as part of a regional stormwater management scheme.
- Recycled water from the planned Upper South Creek Advanced Recycled Water Centre.
- Recycled roof runoff water treated and pumped on site.

5.4. Water Use Minimisation

Sydney Water provides a wide range of advice and guidance relating to water use minimisation and water efficiency. Whilst warehouses and distribution centres are relatively low water users in comparison to other industrial users, the following water use minimisation principles will apply to development within the Westlink Industrial Estate:

- Avoid using water where possible, such as sweeping hard surfaces instead of washing them.
- Reduce water use by installing water-efficient appliances and equipment (e.g., toilets, urinals, shower heads).
- Reuse water from manufacturing or cooling processes to toilet flushing, landscape irrigation and dust suppression.

6. Overland Flow Flooding

The site is located outside the extent of the Flood Planning Area identified in the *Penrith Local Environment Plan 2010*, refer to Figure 13.

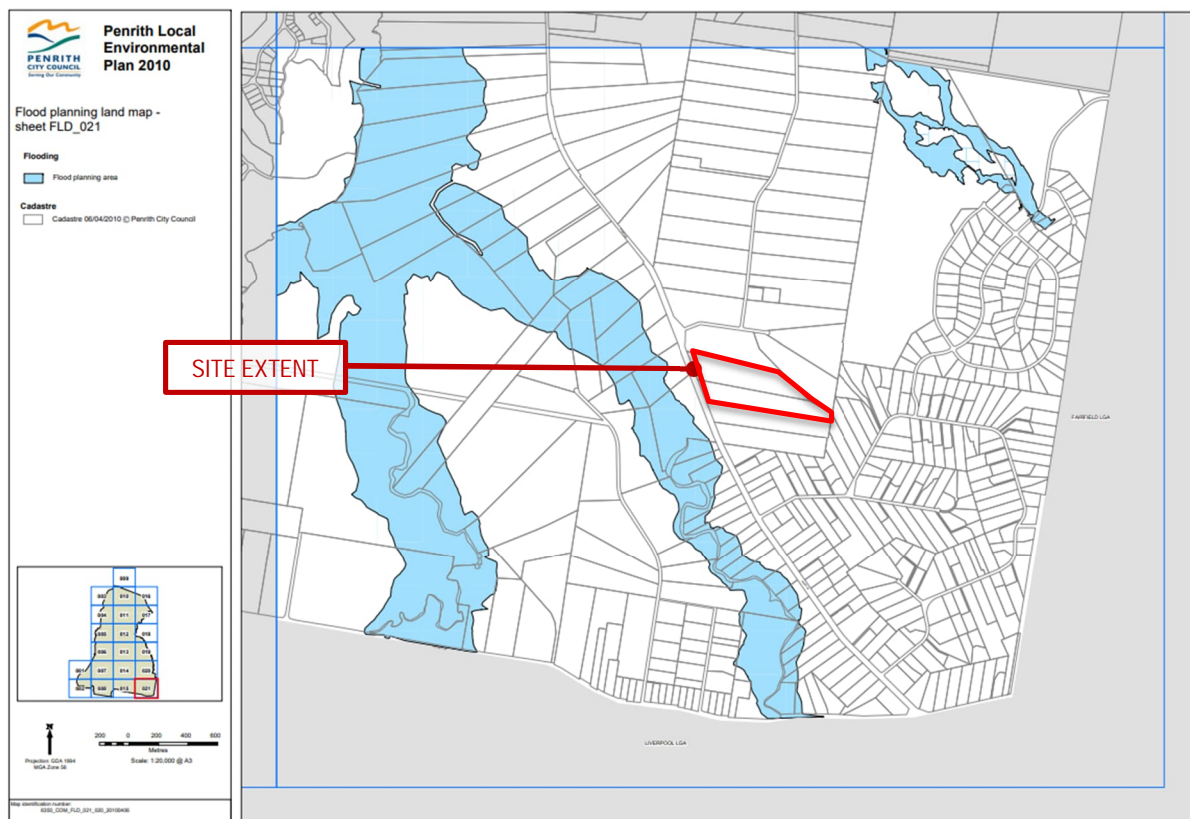


Figure 13 : Extract of flood planning land map (Penrith LEP 2010)

Mapping of the 1% AEP flood extent from local catchments within the Mamre Road Precinct is presented in the *Mamre Road Flood, Riparian Corridor and Integrated Water Cycle Management Strategy* (Sydney Water, October 2020), and is reproduced as Error! Reference source not found. This mapping shows the extent and depth of overland flow from local catchments within the site.

The proposed development of the site, including bulk earthworks, construction of a major and minor drainage system and construction of the proposed detention basin, will satisfy the development controls related to flood prone land outlined in Section 2.5 of the Mamre Road Precinct DCP.

The design of major system drainage elements is consistent with the principles of the NSW Government *Floodplain Development Manual* and Penrith City Council's *Stormwater Drainage Specification for Building Developments*. Under the post-development scenario, overland flow will be safely contained within the proposed road reserve and within trunk drainage infrastructure that has been incorporated into the design of the subdivision works.

As presented in Table 12, the post-development peak flow rates will be less than the pre-development peak flow rates at each of the discharge points for all design storm events between (and including) the 50% AEP and the 1% AEP event. Therefore, there will be no flood impact on adjacent properties associated with the proposed development of the site.

Refer to "Westlink Industrial Estate, Kemps Creek – Stage 2 Flood Impact & Risk Assessment Report" January 2025 by J Wyndham Prince for further details including 2D flood modelling of downstream impacts.

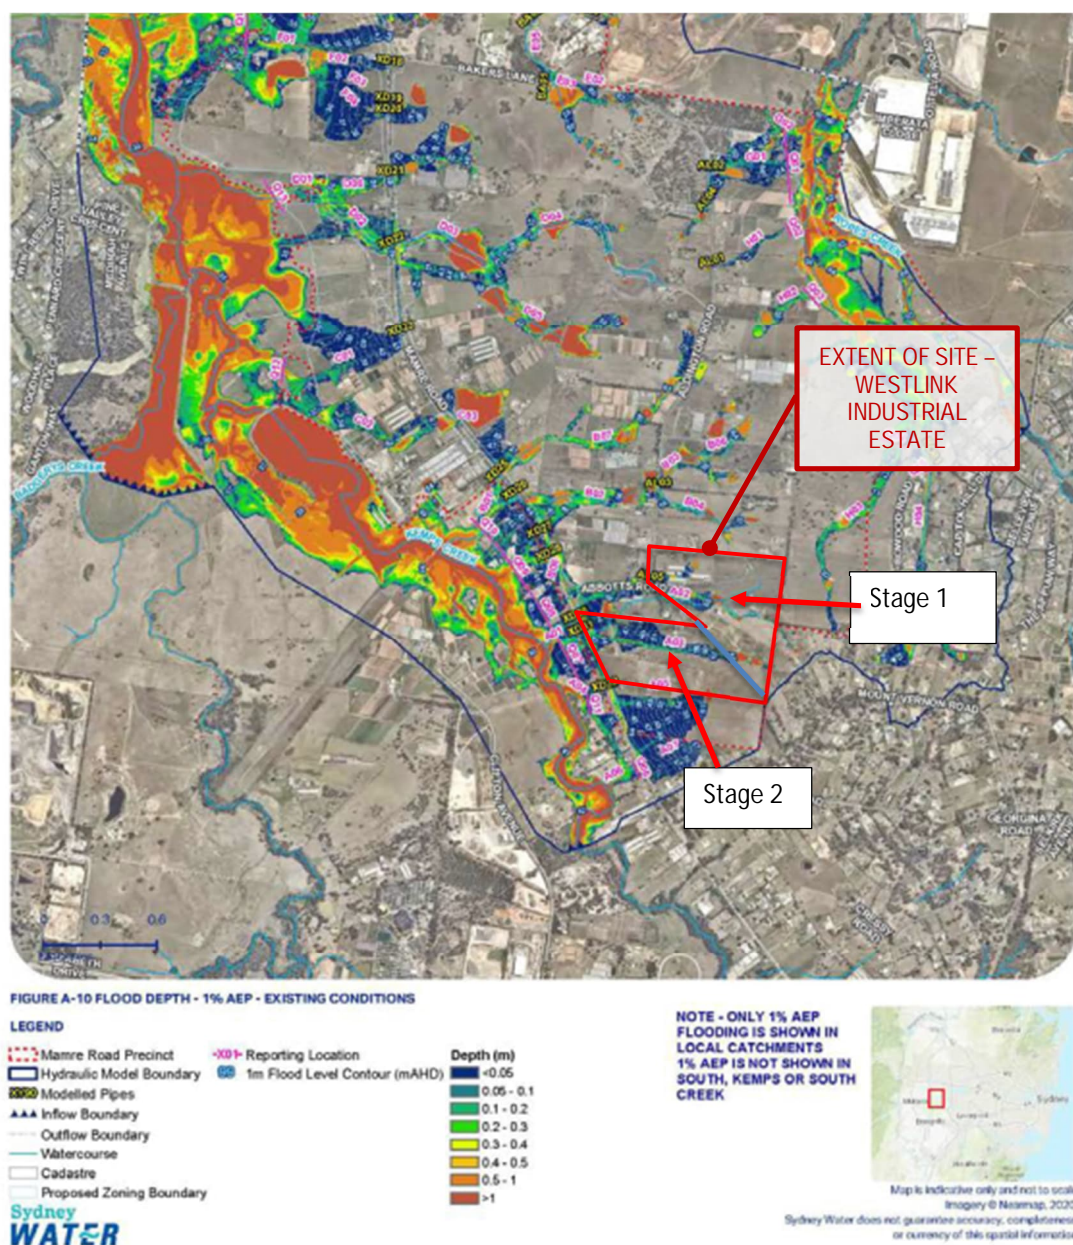


Figure 14: 1% AEP flood depth from local catchments under existing conditions (Sydney Water, 2020)

Figure 14 above shows that there are some flood impacts under the existing conditions within the stage 2 site.

The J Wyndham Prince modelling indicates the development of Westlink Stage 2 and Lot 4 and 5 will not result in adverse flood impacts on surrounding properties and does not adversely increase the flood hazard categories in the site. While the site is impacted by overland flows flood hazards for local floods have been assessed and are managed within acceptable levels.

7. Inspection and Maintenance Plan

7.1. Maintenance and Operations

Inspection and maintenance of the stormwater management measures that will be implemented under Stage 2 Phase 1 conditions shall be undertaken at the minimum frequency as outlined in Error! Reference source not found. The majority of these requirements have been derived from the Penrith City Council guideline titled [*Water sensitive urban design \(WSUD\) inspection and maintenance guidelines*](#) (Version 1.0, 2022).

Refer to Appendix 3 for Inspection and Maintenance Sheets for each of the stormwater management elements that will be owned, operated and maintained by the Property Owner (or representatives), including:

- Rainwater tanks
- On-lot stormwater drainage
- Gross pollutant traps
- OSD Tank

Table 14 - Inspection and monitoring requirements

Inspection / Monitoring Requirement	Responsibility	Timing / Frequency	References / Notes
1. On-lot stormwater drainage (including rainwater tanks)			
Eaves / box guttering system and downpipes	ESR as current property manager	At least once every six months	Refer to Inspection and Maintenance Sheets for rainwater tanks in Appendix 3.
On-lot stormwater drainage – grates and pits	ESR as current property manager	At least once every year	
On-lot stormwater pits and pipes (by CCTV)	ESR as current property manager	At least once every three years	
Rainwater tank (first flush device, external inspection of tank and fittings)	ESR as current property manager	At least once every six months	Refer to Inspection and Maintenance Sheets for rainwater tanks and Maintenance Manual (Appendix 3).
Rainwater tank – internal inspection and cleaning of tank, pumps, pipework and fittings	ESR as current property manager	At least once every year	
2. Gross pollutant traps			
GPT components (lids and surrounds, inlet, outlet, sump, screens, oil baffles)	ESR as current property manager	At least once every six months	Refer to Atlan Vortceptor Operation and Maintenance Manual
3. Estate-wide stormwater drainage (within road reserve)			
Stormwater drainage elements visible at ground level (grates, lintels, headwalls)	Penrith City Council	To be determined by Penrith City Council	Assets to be incorporated into Council's asset management system
Stormwater pits and pipes (by CCTV)	Penrith City Council	To be determined by Penrith City Council	

Inspection / Monitoring Requirement	Responsibility	Timing / Frequency	References / Notes
4. OSD Tank			
Tank inlet and outlet	ESR as current property manager	At least once every six months	Refer to Inspection and Maintenance Sheets for OSD Tank in Appendix 3.
Tank discharge control pit (grates, orifices, screens)	ESR as current property manager	At least once every six months	
5. Stormwater Pump Station and Irrigation Rising Main			
Pre-packaged pump station	ESR as current property manager	At least once every six months	To be confirmed with Pump Manufacturers
Rising Main	ESR as current property manager	At least once every six months	
Irrigation sprinkler system	ESR as current property manager	At least once every six months	
6. Open Trunk Drainage Channel			
Irrigation of landscaped elements	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	Assumed SWC will maintain open trunk drainage channel. To be confirmed with ESR as current property manager how hand over process works
Visual inspections after more than 5mm of rainfall	Sydney Water and ESR as current property manager	Monthly and/or after 5mm of rainfall during establishment	
Debris/Blockage removal	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	
Weed Management and Plant replacement	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	
Soil / Rock Protection inspections	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	

7.2. Monitoring

Elements of the stormwater management measures that will be monitored will be limited to general condition of each of the measures, which will be recorded on the Inspection and Maintenance Sheets for each measure (refer to Appendix 3).

7.3. Reporting and Auditing

Reporting and auditing of the stormwater management measures that will be incorporated under Stage 1 Phase 1 conditions will require completion of Inspection Sheets and Maintenance Sheets at the minimum interval recommended in Error! Reference source not found.. Inspection and Maintenance Sheets for each of the measures are included in Appendix 3 and have been either:

- Reproduced from the Penrith City Council WSUD inspection and maintenance guideline; or
- Produced using a similar format to the sheets incorporated in Council's guideline.

Completed Inspection Sheets and Maintenance Sheets for all stormwater management measures that will be owned, monitored and implemented by the Property Owner will be incorporated in an asset register and retained for the purpose of monitoring and environmental audit reporting that is required under [Division 9.4 of Part 9 of the Environmental Planning and Assessment Act 1979](#).

8. Contingency Management

In the event that this SMP is not effective in managing potential environmental impacts, specific contingency actions will be implemented. Table 15 lists actions to be implemented if inspections, monitoring or auditing indicate that the stormwater management measures listed in Section 5 and any specialist management plans are not effective in managing environmental impacts.

The Contingency Plan categorises conditions as follows:

- **Condition Green** – considered to be normal operating condition.
- **Condition Amber** – minor non-compliance that should be rectified as soon as practical.
- **Condition Red** – non-compliance that should be rectified as a matter of urgency.

Table 15 - Contingency measures relating to operational stormwater management

Element	Trigger / Response	Condition Green	Condition Amber	Condition Red
Water quality monitoring	Trigger	No visible indicators within the Westlink Estate (oil / grease, turbidity). No complaints from property owners downstream of the Westlink Estate	Visible indicators within the Westlink Estate. Complaints from property owners downstream of the Westlink Estate	Prolonged poor water quality within ponds and downstream of the Westlink Estate.
	Response by ESR as current property manager	Continue SMP / OEMP implementation	Water quality sampling and testing to be undertaken to ensure results are just an anomaly and not a trend.	Appropriate rectification measures are implemented (e.g., aeration, additional filtration). Follow up water quality monitoring is undertaken to ensure parameters meet the ambient water quality objectives for the Wianamatta-South Creek catchment.
Flooding (inundation of lots, surcharge of stormwater drainage)	Trigger	Stormwater drainage system and riparian corridor functioning as per design intent (no exceedance of capacity, no surcharge in road network or inundation of lots)	N/A	Inundation of lots. Surcharge of stormwater drainage within road reserve.
	Response by ESR as current	Continue SMP / OEMP implementation	N/A	Check for blockages within stormwater drainage network

Element	Trigger / Response	Condition Green	Condition Amber	Condition Red
	property manager			(sediment, debris, OSD Basin inlet and outlet structures). Rectify when required.
OSD Tank-Safety	Trigger	OSD tank functioning as intended – no visible damage to tank structure	Minor defects within OSD tank (e.g., blockage at discharge control pit).	Major defects within OSD Tank (e.g., failure of the discharge control pit)
	Response by ESR as current property manager	Continue SMP / OEMP implementation	Undertake short-term rectification works to address defects.	Undertake urgent works to address defects.
Pumped Irrigation System	Trigger	Pumped Irrigation system functions as intended- no visible damage to pumps or pressure mains.	Minor defects to Pump and pressure main but pump still operating	Major defects with pump and pressure main. Pump broken and not operating
	Response by ESR as current property manager	Continue SMP/OEMP implementation	Undertake minor repairs	Undertake urgent works to address defects

9. Lifecycle Costs

9.1. OSD Basin

Lifecycle costs associated with the OSD basin will be in accordance with Landcom Water Sensitive Urban Design Book 4 – Maintenance as indicated in Figure 15.

The costs within Figure 15 are based off 2003-2004 rates so would need to be indexed off 2023 prices (According to Rawlinsons 2022, 2003 to 2021 indexation is + 93% is a conservative estimate) and based off current rates provided by Civil and Landscape contractors for all associated WSUD works. These prices would be confirmed during Detailed Design and civil/landscaping tendering periods.

LIFE CYCLE COST ELEMENT	BIORETENTION	WETLANDS	PONDS & SEDIMENTATION BASINS
Life cycle	25 to 50 years	15 to 80 years (with 50 years used as the default in MUSIC) Wetlands are designed to have an infinite life span. However, to determine a life cycle cost, a finite number needs to be set	5 year (sedimentation basins) 50 years (ponds)
Total acquisition cost (TAC) (per m ²)	387.4 x (A) ^{0.7673} \$1000/m ² for first 20 m ² (\$200/m ² for remaining area)	1911 x (A) ^{0.6435} The treatment area used in defining the total acquisition cost is the combined inlet and macrophyte zone area	685.1 x (A) ^{0.7893}
Total annual maintenance (TAM) (%TAC)	48.87 x (TAC) ^{0.4410}	6.831 x (A) ^{0.8634}	185.4 x (A) ^{0.4780} The annual maintenance cost considers the volume of material likely to be removed from the basin per year (referred in MUSIC as the size attribute, V). The size attribute is the sum of gross pollutants, coarse sediment and total suspended solids (TSS) that are trapped in the basin / pond per year
Renewal period (years)	25	20 Renewal considerations include replanting and recontouring of the macrophyte zone	1 year (default in MUSIC due to lack of evidence). 10 years based on available data
Renewal costs (%TAC p.a.)	2.0%	0.52%	1.4% Costs associated with access ramps and contouring Limited data available
Decommissioning costs (% TAC)			38% - only applicable to sedimentation basins

Figure 15 - Lifecycle Costs from Landcom

9.2. Proprietary Stormwater Treatment Devices

Proprietary stormwater treatment device specifications and life cycle costs will be confirmed by the Manufacturer. Ocean Protect & Atlan as manufacturers will provide these specifications at the detailed design stage.

9.3. Pumping and Landscape Irrigation System

Pumping spec and life cycle cost will be confirmed by the Hydraulic Engineer.

APPENDIX 1 – CIVIL DRAWINGS

- 20-748-C5000 SERIES (INFRASTRUCTURE)
- 20-748-C6000 SERIES (ON-LOT)

APPENDIX 2 – STORMWATER HYDROLOGY SUMMARY

04 July 2023

Sydney Water
PO Box 399
Parramatta NSW 2124

Your Ref: TBC
Our Ref: LTR007-02 -20-748 Westlink Industrial
Estate Hydrology

Attention: John Molteno

Email: TBC

Dear John,

Westlink Industrial Estate Hydrology

1. General

This letter summarises the hydrological assumptions being utilised by AT&L across the Mamre Road Precinct to establish predevelopment and post development flow rates.

2. Existing Available Information

The following list of documents provide historical hydrological estimation methods within the Wianamatta South Creek Catchment:

- Flood Study Report, South Creek' (Department of Water Resources, 1990).
- South Creek Floodplain Management Study' (Willing and Partners Pty Ltd, 1991).
- ADI St Mary's Watercycle & Soil Management Study - Final Study Report' (Sinclair Knight Merz, 1998).
- Austral Floodplain Risk Management Study and Plan' (Perrens Consultants, 2003).
- South Creek Floodplain Risk Management Study and Plan' (Bewsher Consulting, 2004).
- Upper South Creek Flood Study' (WMA Water, 2012).
- Upper South Creek Floodplain Risk Management Study and Plan' (Cardno, 2014).
- Updated South Creek Flood Study' (WorleyParsons, 2015).
- South Creek Floodplain Risk Management Study and Plan' (Advisian, 2020).
- Wianamatta-South Creek Catchment Flood Study Existing Conditions (Advisian, 2022).
- Stormwater Scheme Infrastructure Design Guidelines Draft (Sydney Water, 2022).

We note that the hydrological methods for establishing existing conditions across the Wianamatta South Catchment in the reports above vary greatly and range from RAFTS, RORB, WBNM and ILSAX.

3. Predevelopment Hydrology Assumptions

AT&L have been consistent with the Stormwater Scheme Infrastructure Design Guidelines Draft (Sydney Water,

2022) and utilised the ARR2019 IL-CL methodology to establish existing conditions across the development. We note that the *Wianamatta-South Creek Catchment Flood Study Existing Conditions* by Advisian utilised ARR1987 rainfall values in combination with RAFTS to calibrate flows to an existing Flood Frequency Analysis (FFA) for the area.

3.1. Rainfall Data

Rainfall Data was derived from ARR Datahub for the area.

- Coordinates: Longitude: 150.792 Latitude: -33.845
- Rainfall IFD (2019) data
- NSW median pre-burst rainfalls were derived from ARR Datahub.

3.2. IL - CL values

The IL-CL values were derived from the Stormwater Scheme Infrastructure Design Guidelines Draft (2022)

- Pervious Areas – IL: 37.1mm CL: 0.94mm
- Impervious Areas – IL: 1.00mm CL: 0.00mm

No Bx value was nominated as the RAFTS (Laurenson) method for calculating flows was not used.

3.3. Catchment Perviousness

The following Assumptions have been made for catchment perviousness.

- Effective Impervious Area: 5% of total catchment area to account for waterbodies and directly connected roads.
- Remaining Impervious Area: Not utilised
- Pervious Area: 95% remainder of site. We note a sensitivity test was run on perviousness of 100% and 90% and found changes in the order of +/- 5%.

3.4. Time of Concentration

Time of concentration estimation was determined through a combination of the following methods:

- Friend's equation: at the most upstream ends of the catchment to estimate sheet flow (*dependent on Horton's roughness and slope*). A comparative assessment of kinematic wave vs friends equation was undertaken with JWP and AT&L, results indicated time of concentration is similar in both instances for catchment lengths less than 30m . For catchment lengths greater than 30m the a typical manning's open channel equation was utilised with an assumed velocity ranging between 1.5m/s-3m/s dependant on flow rate.
- Manning's Open Channel Flow: where sheet flow ends and becomes concentrated.
- Manning's Pipe Flow: Where open channel flow ends and enters a culvert.

Time of concentration typically ranged between 15 minutes – 28 minutes.

4. Post Development Hydrology

AT&L have been consistent with the industry standards for estimating flows in urban catchments and utilised the ILSAX methodology to establish post development conditions across the local site.

4.1. Rainfall Data

Rainfall Data was derived from ARR Datahub for the area.

- Coordinates: Longitude: 150.792 Latitude: -33.845
- Rainfall IFD (2019) data
- NSW median pre-burst rainfalls were derived from ARR Datahub.

4.2. Soil Depression Storage

The ILSAX values were derived from the Stormwater Scheme Infrastructure Design Guidelines Draft (2022)

- Paved (impervious) area depression storage: 1 mm
- Grassed (pervious) area depression storage: 5 mm
- Soil type: 3

4.3. Catchment Perviousness

Catchment perviousness was established based on land use as follows:

- IN2 Land – 85% imperviousness and 15% perviousness (to be measured at detailed design).
- Roads – 85% imperviousness and 15% perviousness (to be measured at detailed design)
- Water Courses 5% imperviousness and 95% perviousness.


4.4. Time of Concentration

Time of concentration estimation was determined through a combination of the following methods:

- Friend's equation: at the most upstream ends of the catchment to estimate sheet flow (*dependent on Horton's roughness and slope*).
- Manning's Pipe Flow: Where open channel flow ends and enters a culvert.

Time of concentration typically ranged between 6 minutes – 15 minutes. Generally, lots scales along with pit and pipe data results in a fast-reacting catchment.

Yours sincerely,



Darren Galia
Senior Civil Engineer
0433 759 556

APPENDIX 3 – INSPECTION, MAINTANCE AND OPERATIONS GUIDELINES

OPERATION & MAINTENANCE MANUAL

Vortceptor





INTRODUCTION

This operation and maintenance manual has been written to assist asset owners and maintenance staff understand how the Vortceptor GPT works, and how to maintain their asset to ensure it performs optimally throughout its life cycle.

The Vortceptor is a vortex type Gross Pollutant Trap that provides robust, high performing, and reliable primary stormwater treatment. It is able to remove litter, sediment, oil, and particulate bound nutrient pollutants out of stormwater. The Vortceptor has no moving parts, which reduces the risk of moving part malfunctions.

It is constructed out of a FRP (fibreglass) body, and 316 stainless steel screens that has been specifically engineered to withstand the tough demands of stormwater and wastewater applications. FRP is resistant to the most demanding of conditions and can exceed the durability of conventional precast concrete and cast in-situ concrete construction.



Manufacture

The Vortceptor is manufactured in Penrith NSW Australia.

Why FRP?

Glass fibre reinforced polymer (FRP) or fibreglass is a composite material of high strength glass fibre reinforcement in a polymer resin matrix. The glass fibres provide the main load bearing function of the material, and can be woven and aligned specifically for strength. Glass fibre reinforcing provides ideal engineering properties of linear elastic behaviour until failure, and extremely high strength that can exceed that of steel in tension. The matrix has 4 important functions: 1. It holds the glass fibre reinforcing in place 2. It transfers forces to and between the fibres, 3. Prevents buckling of the fibres 4. it provides the beneficial protection from the environment. The resin is specifically formulated to ensure resistance to harsh stormwater environments, that can exceed the durability that of concrete.

This material stands up to the harshest environments, commonly found in stormwater, wastewater, acid sulfate soils, and saltwater.

Fibreglass is becoming a material that is enjoying increased adoption in civil structural engineering applications worldwide due to its light weight, high strength, and its ability to resist degradation. The ability of fibreglass to achieve high strength with low weight means that the Vortceptor can be fabricated and delivered to site in a substantially assembled state. The treatment chamber is mostly one-piece, with the other sections being any risers, covers, and a precast concrete diversion chamber. One-piece construction means there are no joints to be made on site for the treatment chamber, which eliminates the potential for leaking joints, and risk of backfill and subgrade degradation from water egress through leaking joints. This means that the Vortceptor will provide a more reliable and watertight body, than one made from precast concrete components that are joined and sealed onsite. This is especially important as joints must be able to withstand tremendous hydrostatic pressures. The Vortceptor takes away this risk by eliminating joints, using a single piece FRP body.

MAINTENANCE



Structural strength of FRP

The Vortceptor has been engineered to withstand the forces associated with structures that are buried and carry vehicular loads. The Vortceptor has been engineered to withstand vehicular loadings to Class D rating per AS3996. A cast in situ concrete cover slab that is 600mm larger than the diameter of the FRP Vortceptor separation chamber, and 200mm thick is required to support a dynamic T44 traffic load. The precast concrete diversion chamber is rated to carry Class D traffic loads without the need for the additional concrete cover slab. Refer to Atlan Stormwater Vertical Tank installation guide for further details.

Safety Precautions

The Vortceptor is an underground structure that retains water. Ensure that adequate safety equipment and procedures are in place to avoid personnel falling into the Vortceptor, as there is a severe risk of drowning.

The Vortceptor is deemed a confined space. It is not necessary to enter the Vortceptor during maintenance, however in the rare event that entry is required, it should only be done so by suitably qualified and equipped personnel, working in accordance with strict OH&S laws, regulations and procedures.

Pollution captured by the Vortceptor can be hazardous to health. Do not make contact with the pollutant material. Ensure personnel are fully equipped with PPE to avoid contact and have procedures in place for first aid.



OPERATION

The Vortceptor is comprised of two chambers: The separation treatment chamber stormwater enters this chamber by being directed by a weir into a chute and is then circulated into the screening area. A vortex flow pattern forms as a result of flow velocity and head. Pollutants are removed via screening, and via centrifugal and gravitational forces acting to separate sediment and other particles.

Pollutants are captured and are stored in a sump area separate to the screening area. The shear cone separates the screening area and the sump, and acts to create quiescent conditions in the sump. This is what allows the Vortceptor to avoid resuspension of captured pollutants. The sump resides directly below the screening area and is conveniently accessible from the manhole for vacuum cleaning.

Storage of pollutants away from the screening area ensures that the Vortceptor can provide a consistent treatment flow rate, that does not diminish according to the level of pollutants stored. This is a key advantage over other GPTs that store pollutants in the screening area.

Floating pollutants are kept at the top of the screening area, but do not impede flow rate. An oil baffle acts to contain oil and hydrocarbons within the treatment chamber. The captured floatable pollution remains inside the Vortceptor until the time it is cleaned.

The vortex action of flow acts to create a shear force across the face of the 316 stainless steel vortex separation screen. The flow is tangential to the screen, which acts to create a self-cleaning effect and prevents the screen from blinding.

Treated flows are then discharged into the diversion chamber via the outlet chute and then discharged from the diversion chamber outlet into the drainage network.

The Diversion Chamber Pit

This chamber allows interface of the Vortceptor with the pipe or culvert drainage network. A weir goes across the width of the Diversion Chamber and is angled so that it is aligned with the entry chute to the separation treatment chamber. The Diversion Chamber is sized to allow bypass of flows exceeding the treatment flow rate over the weir.

Inline Vortceptor models have a small diversion chamber integrated over the separation treatment chamber, to provide a unit that is packaged into a compact footprint.

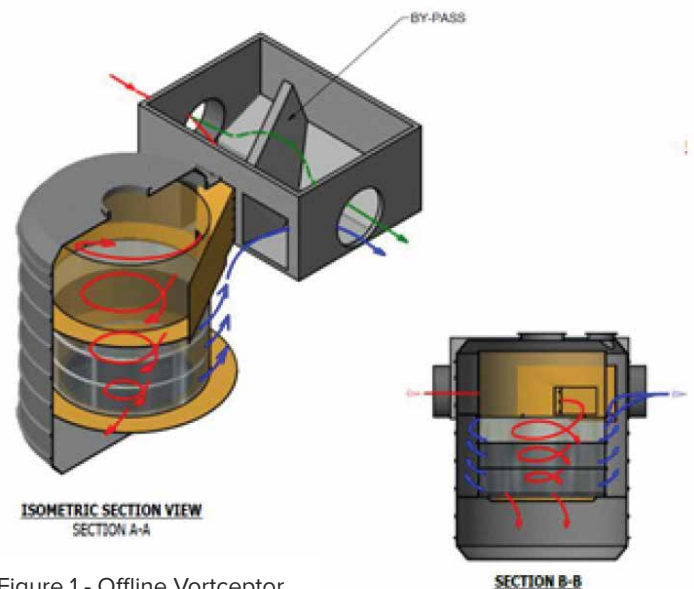


Figure 1 - Offline Vortceptor

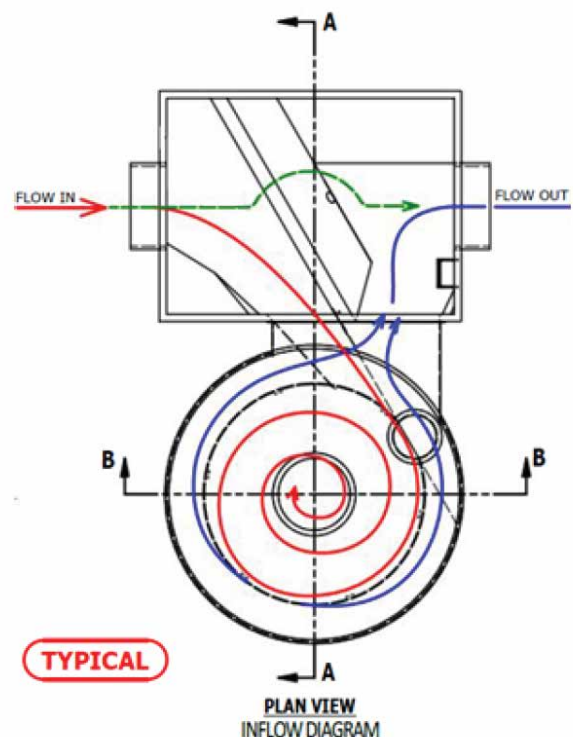


Figure 2 - Offline Vortceptor Plan view showing Separation treatment chamber (Circle) and diversion chamber (rectangle)

Offline and Online

The Vortceptor GPT comes in an offline and online configuration. Offline – the treatment separation chamber is adjacent to the diversion chamber. Online – The diversion chamber and the separation treatment chamber are integrated together.

Cleaning options

The following cleaning options allow asset owners to choose the best option available for ongoing maintenance and the required cleaning frequency with the right cleaning services and resources available.

Depending on the size, access, and depth of the system, the three following methods can be used to clean the Atlan Vortceptor.

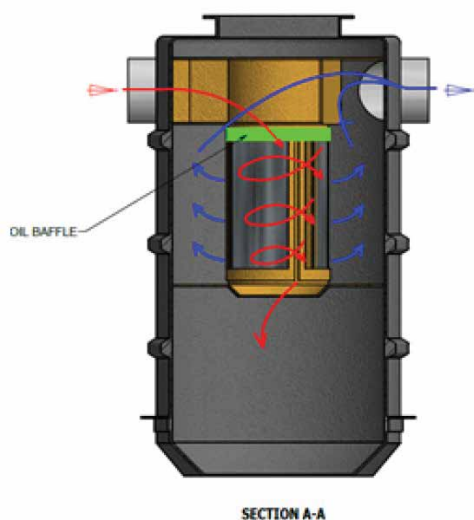


Figure 3 - Online Vortceptor in Elevation view

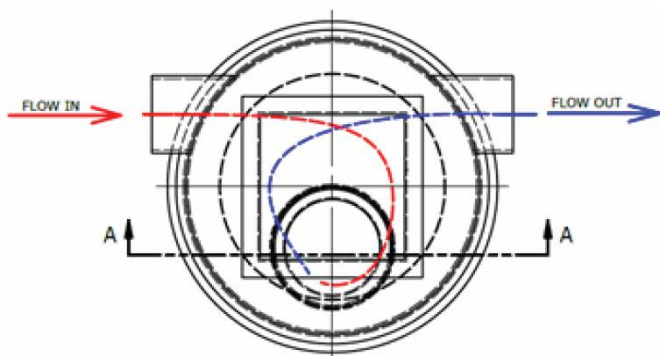


Figure 4 - Online Vortceptor in Plan view showing the diversion chamber and separation chamber in line



Vacuum Suction Cleaning

Equipment needed – eductor truck

Personnel needed – 2

Suction cleaning is used for most proprietary GPT's. This is by far the most convenient and safest method but does require specialist machinery to achieve. There are several specialist companies that offer vacuum suction cleaning of GPTs. Costs are usually based on the total volume of pollutants disposed, as well as water removed. Asset owners should enquire with cleaning contractors if the option to decant captured water back into the Vortceptor is possible, to reduce disposal fees.

Grab Cleaner

Equipment needed – truck with mounted crane and grab attachment

Personnel needed – 1 to 2

The Grab Cleaner can be carried out without dewatering the system. However, this operation is limited to the larger Vortceptor models with larger screen internal diameters. This option is practically only available for the SVO.530 and above as they have screen internal diameters of 2m. Care must be taken by the operator to ensure that the grab does not make contact with the stainless steel screen, and the shear cone underneath the screen area.

The grab truck cleaning option offers the removal of 80 – 90% of the pollution stored in a sump. It can be a cheaper option than vacuum suction cleaning. However, the asset owner must still allow for an annual vacuum clean, to remove accumulated sediment in the sump and behind the screens.

Removable Basket

Truck with mounted crane
Personnel – 1 to 2

If a removal waste basket is fitted, it can be lifted at any time, without the need for dewatering. This is the fastest and the most cost-effective option but comes at the sacrifice of sump capacity. The basket will not impede flow rate.

The smaller sump capacity that results from using a basket may lead to the need for more frequent maintenance activities. But this is offset by the ease and ability to carry out the cleaning activity in house.

An annual vacuum clean to thoroughly dewater and remove accumulated sediment will be recommended for this approach.



Tidal and backwater affected Vortceptors

Gross pollutant traps, including the Vortceptor, may from time to time, be required in tidal and backwater affected locations. The designer should consider specifying a penstock or stop valve on the outlet side of the Vortceptor, so that the Vortceptor can be isolated from tidal and backwater, and effectively dewatered and cleaned. It will be critical for the maintenance crew to re-open the penstock or stop valve after they have finished maintaining the Vortceptor. Failure to re-open the penstock or valve can lead to catastrophic flooding.

Increasing the Vortceptor sump capacity to spread out the cleaning intervals

Vortceptor sump capacities can be increased over and above the standard capacities listed in Table 1 below. It is recommended that the designer carefully estimate the expected pollution load volumes from their catchment and target a sump capacity to match a desired cleaning frequency. Extending the sump is only possible during the desktop design stage, before the Vortceptor is manufactured, so good early planning and design is essential.



Atlan Vortceptor Maintenance Capacities & Dimensions Inline

Models	Dimensions (mm)					Capacities			
	Internal Diameter	Overall Width	Depth Below Invert	Manhole Size (mm)	Max Pipe Size (mm)	Sump Capacity (m³)	Floatables Volume (m³)	Treatable Flow Rate (L/s)	Max Flow Rate (L/s)
INLINE SERIES									
SVI.025 (L/R)	1200	1370	1400	600x 600	450	1.2	0.06	26	280
SVI.055 (L/R)	1800	1970	1650	900x 900	525	2.7	0.22	55	380
SVI.055.M (L/R)	2200	2370	1585		525	3.2	0.22	55	750
SVI.100/15 (L/R)	1500	1670	1900	1000 DIA Internal 600x 600	600	3.1	0.20	100	700
SVI.160/22 (L/R)	2200	2370	2400		750	3.4	0.39	160	940
SVI.200/22 (L/R)	2200	2370	2900		750	3.1	0.39	200	990
SVI.300/22 (L/R)	2200	2370	3100		750	4.5	0.83	300	1050
SVI.400/22 (L/R)	2200	2370	3000		750	3.4	0.83	400	1180
SVI.400/25 (L/R)	2500	2670	2900		900	5.5	0.83	400	1650
SVI.400/30 (L/R)	3000	3170	3500		900	10	1.5	400	2500
SVI.500/30 (L/R)	3000	3170	3500		1050	10	1.5	500	1650
SVI.500/35 (L/R)	3500	3670	4000		1050	10	1.5	500	1900



Atlan Vortceptor Maintenance Capacities & Dimensions Offline

Models	Dimensions (mm)				Capacities			
	Internal Diameter	Overall Width	Depth below invert	Manhole Size (mm)	Sump Capacity (m³)	Floatables Volume (m³)	Treatable Flow Rate (L/s)	Bypass Flow Rate (L/s)
OFFLINE SERIES								
SVO.096 (L/R)	1500	1670	1725	1000 DIA Internal 600x600	2.0	0.35	96	PROJECT SPECIFIC DESIGN
SVO.140 (L/R)	1500	1670	2025		2.3	0.35	140	
SVO.180 (L/R)	1500	1670	2325		3.0	0.35	180	
SVO.220 (L/R)	2200	2350	2800		4.5	1.1	220	
SVO.360 (L/R)	2200	2350	3080		6.0	1.1	360	
SVO.530 (L/R)	3000	3150	3200		8.5	2.8	530	
SVO.800 (L/R)	3000	3150	4200		8.5	2.8	800	
SVO.810 (L/R)	4000	4150	3400		19.3	5.65	800	
SVO.1200 (L/R)	4000	4150	4000		19.3	5.65	1200	
SVO.1600 (L/R)	4000	4150	4600		19.3	5.65	1600	

Maintenance

The Atlan Vortceptor requires regular inspections and cleaning. There are no consumable parts on the Atlan Vortceptor throughout its operating life. The regularity of inspections and cleaning of the Vortceptor is contingent on the features and properties of the catchment area. Good monitoring and record keeping systems by the asset owner will allow them to optimally schedule cleaning activities for each individual Vortceptor. The section below provides asset owners some guidance to the frequencies for maintaining the Vortceptor.

Inspection

Routine inspection is the key to effective maintenance. Pollutant transportation and deposition may vary from catchment to catchment. Regular routine inspections will help the asset owner assess the rate of pollutant capture for that specific location.

At a minimum, routine inspections should be performed twice per year. The suggested inspection frequency in the first year of operation is 3 months.

This interval can be extended to 6 months at the discretion of the asset owner. The routine visual inspection should ascertain that the system components are in working order and that there are no blockages or obstructions in the inlet, outlet, and separation screen. The routine inspection should also quantify the accumulation of floating trash, and sediment in the sump. Measuring pollutant accumulation can be done with a calibrated dipstick, tape measure or other measuring instrument. All inspections should be recorded. A sample inspection report is attached to this manual. Furthermore, it is recommended that the Vortceptor be inspected after every major rain event, with a focus on ensuring there are no blockages to the inlet and outlets of the Vortceptor and the diversion chamber.

Access for maintenance

Separation Treatment chamber

The separation treatment chamber has adequate access for maintenance. Vortceptor models up to SVO.360 have single manhole access, whereas the larger Vortceptor models SVO.530 and above have 2 manholes, consisting of Class D cast iron lids. The lid in the centre of the separation chamber provides access into the screen and sump area.

The single round lid as pictured below provides access behind the screen, so that sediment can be extracted using a vacuum.

The lids are locked with bolts. The lids can be lifted using standard manhole cover lifters.

As described above, an additional Class D manhole cover allows access to the clean water side of the screen, or otherwise called the area 'behind the screen'. This area can have some level of sediment deposition over time. This manhole allows convenient access, by allowing the vacuum hose to be dropped down vertically to the area behind the screen. It is recommended that the area behind the vortex separation screen be cleaned annually, to avoid build-up of sediment. Alternatively, access behind the screen can be gained by inserting the vacuum hose from the outlet side of the diversion chamber, and into the outlet of the separation treatment chamber.



Diversion chamber

There are access manholes above the diversion chamber, with a lid situated either above the inlet side and/or the outlet side of the chamber.

These manholes allow for visual inspection to the treatment chamber inlet and outlet chutes, and if required, access for cleaning.

Access for Maintenance

Pollution removal performance will not be impacted until 100% of the sump capacity is exceeded however it is recommended that the system be cleaned prior to reaching maximum sump capacity for easier removal of sediment. The level of sediment is easily determined by measuring from the finished surface level down to the top of the sediment pile. To avoid underestimating the level of sediment in the chamber, the measuring device must be lowered to the top of the sediment pile carefully. Particles at the top of the pile typically offer less resistance to the end of the rod than consolidated particles toward the bottom of the pile.

Method to calculate the % sump capacity filled with pollutants

1. Determine the water depth that is above the sediment layer. This is done by taking two measurements with a measuring staff: one measurement from the finished surface level (ie manhole opening level) to the top of the sediment pile and the other from the manhole opening to the water surface.

2. If the difference between these measurements is less than the Depth from water level to top of sump in table 2, the system should be cleaned out. If the water depth to the sediment is less than the water depth to the top of sump, this means the sediment level is above the sump.

3. If the water depth to sediment is greater than the depth from water level to top of sump, calculate the % of sump that contains sediment by the following method:

Height of sediment = Depth of Water level to top of sump + Sump depth - water depth to sediment
Sump % full = height of sediment / height of sump x 100

A work sheet is attached to the end of this manual to assist with calculating and recording the sump levels.

Models	Sump depth (mm)	Depth from Water level to top of sump	Sump Capacity (m ³)	Light Liquid Volume (L)	Floatables Volume (m ³)
INLINE SERIES					
SVI.025	25	1400	500	600	770
SVI.055	55	1650	700	800	770
SVI.055.M	55	1585	700	800	770
OFFLINE SERIES					
SVO.096	1150	1010	2.0	239	0.39
SVO.096	1320	1260	2.3	239	0.39
SVO.096	1380	1560	2.5	239	0.39
SVO.096	1430	1560	4.3	515	1.1
SVO.096	1570	1860	6.0	515	1.1
SVO.096	1270	1860	8.5	1263	2.8
SVO.096	1270	2860	8.5	1263	2.8
SVO.096	1540	1860	19.3	2155	5.65
SVO.096	1540	2490	19.3	2155	5.65
SVO.096	1560	3150	19.3	2155	5.65

Table 2 - Sump depth dimensions

Cleaning

Cleaning of the Vortceptor system should be done during dry weather conditions when little or no flow is entering the system. The use of a vacuum truck is generally the most effective and convenient method of removing pollutants from the system. Simply remove the manhole covers and insert the vacuum hose into the sump.

The system should be completely drained down and the sump fully evacuated of sediment, and a final hose down of the screen and sump.

Disposal of material

The material captured by the Vortceptor could include hazardous material, such as syringes, chemicals, and sharp objects. Care must be taken by cleaning crews and they must work in accordance with a specific job safety plan. PPE such as gloves, protective wear, boots should be mandatory. Disposal of material must be done in accordance with all environmental regulations. In many jurisdictions, disposal of the sediments may be handled in the same manner as the disposal of sediments removed from catch basins.

Inspection and cleaning frequencies

The frequency of cleaning will depend on the pollutant loads of the catchment, so inspections are recommended to confirm the maintenance intervals, which could be either three, six or twelve months.

Visual inspection and cleaning frequencies

	After every major storm	3 months	6 months	12 months
Visual inspection of treatment chamber	-	visually inspect every 3 months. Measure the amount of pollutants in the sump	-	-
Visual inspection of diversion chamber	Check inlet and outlet pipe or culvert for blockages	-	Visually inspect the diversion chamber for any signs of blockage and sediment build up	Visually inspect the diversion chamber for any signs of blockage and sediment build up
Regular Clean – Removal of captured pollutant material from the Vortceptor separation chamber	-	-	-	-
-	-	-	Primarily to remove floatables and sump contents contents. Note Cleaning interval is every 6 months on average but may need to be adjusted according to site specific conditions. Interval frequency can be reduced if extended sump has been installed	-
Full dewater and clean	-	-	-	Full sump pump out, jet screen and sump
Clean behind screen	-	-	-	In conjunction with full dewater and clean
Visual inspection of Vortex separation screen	-	-	-	Note the condition of the screen – note down signs of damage if any
Clean diversion chamber	-	-	Visual inspection	Remove sediment buildup if required.

Repairs and replacement

The Vortceptor does not have any consumable parts that require replacement throughout its design life of the unit. However, in the unlikely event that the Vortceptor requires repair due to damage, the following provides guidance on repairing the Vortceptor.

All repairs should be conducted by suitably qualified personnel, following OH&S requirements for working in confined spaces. All repairs should be conducted in dry weather and should be conducted after the Vortceptor has been dewatered and emptied.

Vortex Separation Screen

The vortex separation screen is comprised of 316 stainless steel. The Screen is not a consumable item. In the unlikely event that the screen is damaged, specific sections of the screen can be removed by cutting them out. Replacement screens can be riveted into the fibreglass body, and tack welded to the neighbouring screens. The installer must ensure that the screen is installed such that the screen aperture is facing the correct direction.

The way to check this is to run a hand over the surface of the screen. Ensure you are wearing gloves. The screen is smooth when stroking in one direction, and rough when stroking in the opposite direction. The smooth direction indicates the direction that the vortex will flow. Ensure that the replaced screen is in the same direction as of the screens next to them. Replacement screens are available from Atlan Stormwater, as well as specialist on site support from Atlan Stormwater's maintenance team.

Shear cone

The shear cone is not a consumable item. The only practical way it will be damaged is if a grab makes contact. Vortceptors up to SVO.360 have FRP shear cones, and the units from SVO.530 and above have 316 stainless steel shear cones. Replacement of the shear cone has been designed for easy replacement.

First completely dewater the unit, then gain access, noting that it is a confined space. Undo bolts and replace the damaged shear cone section. The shear cone is divided into 4 separate

sections, so that only the damaged section needs to be replaced. Replacement shear cone sections are available from Atlan Stormwater as well as specialist on site support from Atlan Stormwater's maintenance team.

Cast iron Manhole covers

Cast iron manhole covers are not consumable items. However in the event they are damaged, they are readily available on the market as standard covers are used for the Vortceptor.

Precast concrete Diversion chamber

The diversion chamber is made of min 40Mpa concrete. Damage or cracks can be repaired with a concrete mortar such as Rapidset, Xypex, Parchem. 2-part epoxy and flexible fillers such as Sikaflex are also widely available. Refer to the manufacturers for specialist details on repairing precast concrete for water retaining structures.

Fibreglass components

One of the many benefits of using FRP/fibreglass over conventional materials such as concrete is its ease and durability of repairs. The material to repair fibreglass is readily and widely available.

Safety

Ensure the work area is well ventilated as the resin fumes can be harmful, especially in a confined space area. Resins, acetone, and FRP dust are flammable. Peroxides (catalyst) are strong oxidizing agents and can ignite fuels. Follow MSDS instructions, including PPE prior to commencement of repair work.

Repairs to Fibreglass

A key principle of repairs to fibreglass is that the repair will differ from the original fibreglass primary structure. The original resin and glass reinforcing fabric in the primary structure has cured and bonded chemically and physically with each other, forming the primary bond. Repairs to a damaged fibreglass part is referred to as secondary bonds, that are attached to the primary structure. The repair relies on the physical bond to the primary structure, and the resin must have strong adhesive properties. Increasing the surface area of the bond to the primary structure will increase the strength and durability of the repair.

Parts for repair

1. Resin – Polyester resin or Vinyl ester resin
2. Catalyst / Hardener – MEKP (Butanox M50 or equivalent)
3. Fibreglass matt – 450g/m2 chopped strand mat
4. Acetone – for cleaning the bond surface
5. Hot Coat – finishing layer (resin mixed with 1% solution of 8% wax in styrene can be used for this purpose)
6. Paint brush and or roller – for applying resin to fibreglass mat

Commercial fibreglass repair kits are widely available and can be used to repair the Vortceptor.

Identify the Damaged Area

Identify the damage and draw the boundary of the damage. An easy inspection method is to tap a solid material, like a coin, and listen for any differences in the sound of the tap. Mark out suspect areas. Damage could be cracks, holes, puncture, and delamination.

Trimming and cutting

Cut out the damaged area if you cannot patch over the area. Otherwise grind the surface as described below. Most concrete or masonry cutting tools are compatible to cut FRP. Note that high speed cutting tools for metals are not suitable for FRP.

Surface cleaning and grinding

Grind approximately 20mm or more of surface area from the damaged area to promote adhesion of the repair. Grind surface using abrasive methods.

Recommended equipment are 4 inch grinder with 34 grit sanding disc, or an orbital sander with a low grit number such as 60 grit. Do not use chemical primers. Grind the surface until the glossy finish of the resin is no longer visible, surface is even and uniform with no high or low spots. A slight taper in the surface will assist with locking in the repair.

Clean the surface of dust, water, oil. Brush or vacuum to remove dust, then wipe the surface with clean acetone. The surface should not be wet and must be dried.

The surface must be prepared again if the repair has not been performed within 24 hours of the surface preparation, or if the surface is contaminated with oil or water.

Resin preparation

Mix resin and catalyst in small batches. Catalyst should be between 1.25% to 2.5% of the resin weight. The reaction of the resin and catalyst will cause high amount of heat when curing. Refer to the resin and catalyst manufacturer's instructions.

Applying Fibreglass layers


Wet the bonding surface with catalysed resin. Apply fibreglass mat in layers, and completely cover with resin. Minimise the layer thickness to no more than 7mm, to avoid generating excess heat. Build up the layers until it matches or exceeds the thickness of the primary structure. Press the layers together to avoid the formation of air pockets between the layers, by using a roller.

Finishing the Fibreglass repair

After all layers are applied, a final coat of 'Hot Coat' is to be applied. The Hot coat can be applied while the top layer is still wet.

Further Assistance

Thank you for choosing the Atlan Vortceptor GPT. We are confident that it will faithfully carry out the essential task of keeping our waterways clean of pollution and do so in a robust and hassle-free manner for years to come. Our confidence in the product is backed by our 25 year warranty. Engineering and maintenance support are at hand for all asset owners. Contact Atlan Stormwater on 1300 773 500 or email maintenance@atlan.com.au.

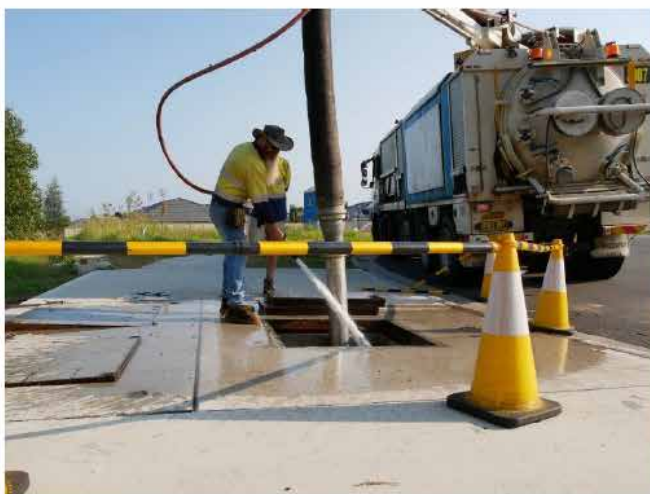

Inspection & Maintenance Log

Model _____ Location _____

Date	Depth from manhole to top of sediment	Depth from manhole to top of water level	Water depth to sediment (1) – (2)	Water Depth top of sump (from table 2)	Is the water Depth (3) less than water depth to sump (4) Yes/No If yes, organize clean	% sump capacity full	Describe Maintenance Performed	Comments
(1)	(2)	(3)	(4)					

a. The water depth to sediment is determined by taking two measurements with a measuring staff: one measurement from the manhole opening to the top of the sediment pile and the other from the manhole opening to the water surface.

b. Obtain the Water depth to top of sump for the specific Vortceptor model from table 2 of this manual

c. Compare the Water Depth to Sediment (3) to the Water Depth to top of sump (4). If the water depth to the sediment is less than the water depth to the top of sump, this means the sediment level is above the sump.

d. If the water depth to sediment is greater than the depth from water level to top of sump, calculate the % of sump that contains sediment by the following method:

Height of sediment = Depth of Water level to top of sump + Sump depth - water depth to sediment
 Sump % full = height of sediment / height of sump x 100

e. For optimum performance, the system should be cleaned out when the floating hydrocarbon layer accumulates to an appreciable

Ecoceptor 6000 SERIES


SELECTION CHART

Weight approximately 700kg each

MODEL	E/606767	E/607575	E/609090
Inlet (mm)	675	750	900
Outlet (mm)	675	750	900
Invert Level* (mm)	1400	1400	1400
Overall Height* (mm)	3300	3300	3300
Internal Diameter (mm)	2200	2200	2200
Manhole Opening (mm)	900 x 600	900 x 600	900 x 600
Manhole Quantity	1	1	1
Max Silt Capacity (Litre)	6000	6000	6000
Max Hydrocarbon Capacity (Litre)	2200	2200	2200
Max Capacity (Litre)	11500	11500	11500

Atlan Stormwater accepts no responsibility for any loss or damage resulting from any person acting on this information. The details and dimensions contained in this document may change, please check with Atlan Stormwater for confirmation of current specifications.


*Height does not include lid.

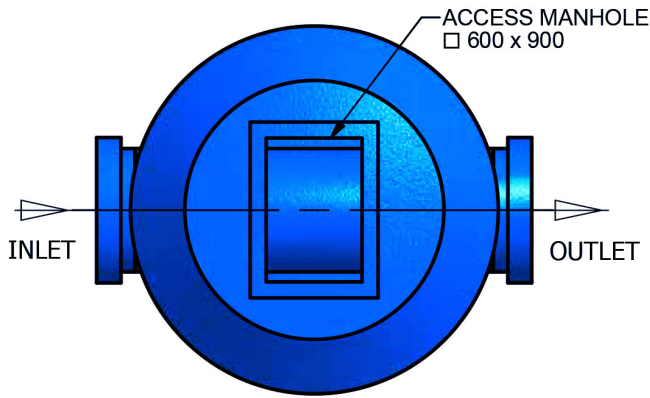


PLAN VIEW



ISOMETRIC VIEW

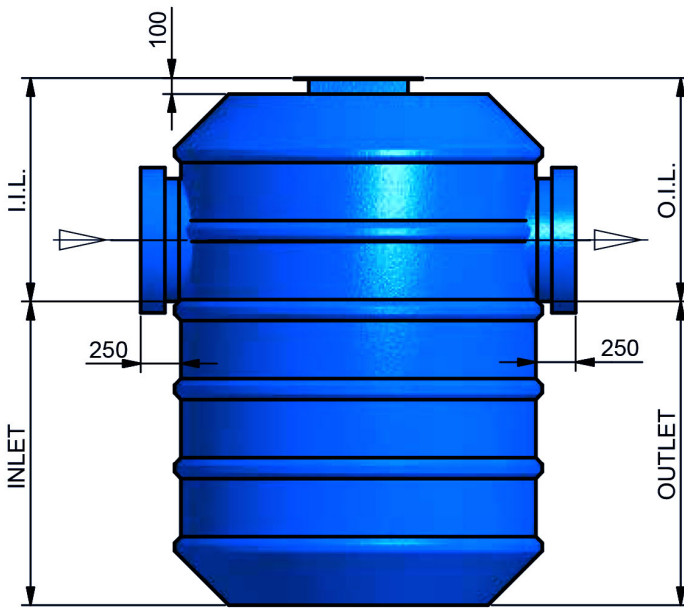

ELEVATION VIEW

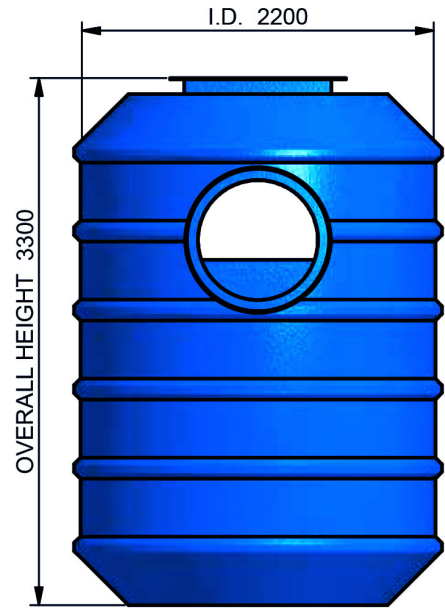

SIDE VIEW

TOLERANCE: ALL DIMENSIONS 10mm UNLESS OTHERWISE STATED.

ALL INTERCONNECTING PIPEWORK, PITS AND ASSOCIATED DRAINAGE BY OTHERS

Drawn P.Z.	Date 10-10-17
Check	Date
Verified	Date
Approved	Date
Request No. RN4656	

Atlan
STORMWATER

P 02 8705 0255 sales@atlan.com.au
100 Silverwater Rd,
Silverwater NSW 2128
atlan.com.au

PRODUCT :

6000 SERIES

TITLE

SCALE N.T.S	SIZE 1	SHEET 1	REV 1
CUSTOMER CODE :		DWG No. SP17-EC39300-P	

Ecoceptor 8000 SERIES

SELECTION CHART

Weight approximately 1350kg each

MODEL	E.175.105105	E.185.135135	E.200.150150	E.8018090.BC
Inlet (mm)	1050	1350	1500	1800x800 BC
Maximum Treatment Flow (lps)	1750	1850	2000	-
Outlet (mm)	1050	1350	1500	1800x800 BC
Invert Level* (mm)	2400	2400	2400	1800
Overall Height* (mm)	4500	4500	4500	4500
Diameter (mm)	2480	2480	2480	2480
Manhole Opening (mm)	900 x 600	900 x 600	900 x 600	900 x 600
Manhole Quantity	2	2	2	2
Max Silt Capacity (Litre)	10,000	10,000	10,000	10,000
Max Hydrocarbon Capacity (Litre)	4200	4200	4200	4200
Max Capacity (Litre)	19,000	19,000	19,000	19,000


Atlan Stormwater accepts no responsibility for any loss or damage resulting from any person acting on this information. The details and dimensions contained in this document may change, please check with Atlan Stormwater for confirmation of current specifications.

*Height does not include lid.


2




1

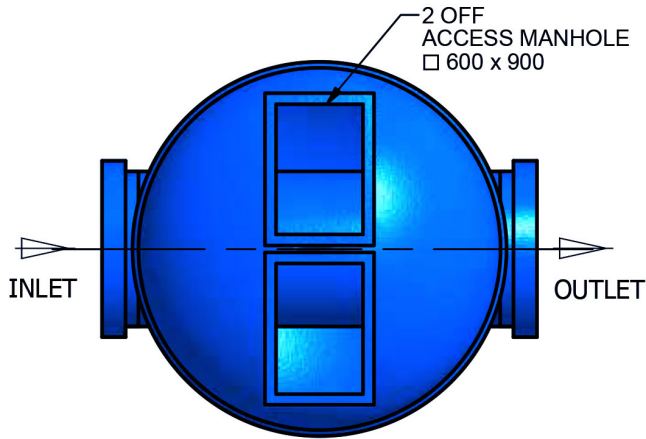


PLAN VIEW

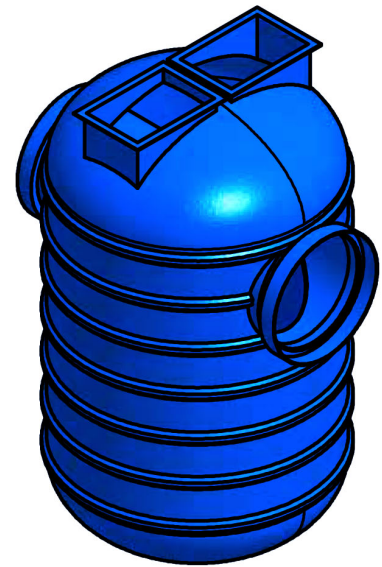

ISOMETRIC VIEW

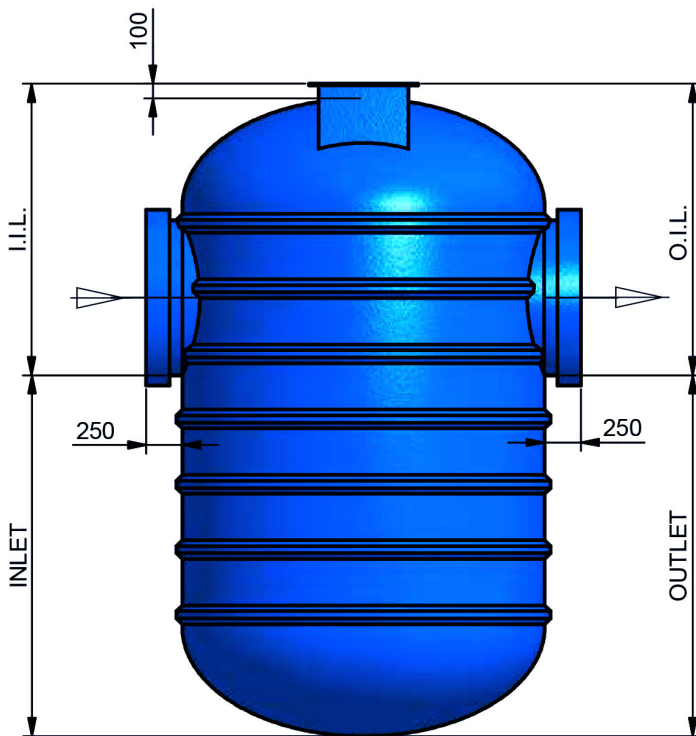

ELEVATION VIEW

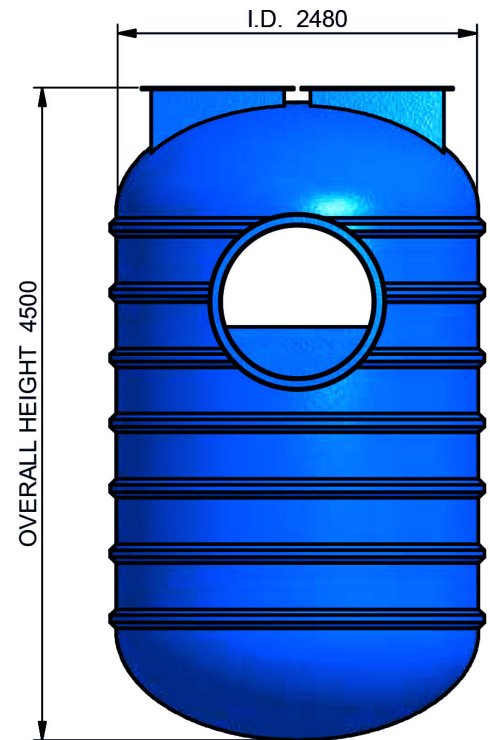

SIDE VIEW

TOLERANCE: ALL DIMENSIONS 10mm UNLESS OTHERWISE STATED.

ALL INTERCONNECTING PIPEWORK, PITS AND ASSOCIATED DRAINAGE BY OTHERS

Drawn P.Z.	Date 22-03-18
Check	Date
Verified	Date
Approved	Date
Request No. RN1801	

Atlan
STORMWATER

P 02 8705 0255 sales@atlan.com.au
100 Silverwater Rd,
Silverwater NSW 2128
atlan.com.au

PRODUCT :

8000 SERIES

TITLE

SCALE N.T.S	SIZE 1	SHEET 1	REV 1
----------------	-----------	------------	----------

CUSTOMER CODE :

DWG No.

SP18-EC10590-P

2



1

C:\Vault Working Folder\Designs\SP18\PRODUCTS\ECOCEPTOR\8000 Series\SP18 BROCHURE DRAWING\SP18-EC10590-P.dwg

Joy in water

'We believe clean waterways are a right not a privilege and we work to ensure a joy in water experience for you and future generations.'

Andy Hornbuckle



Atlan
STORMWATER

P 02 8705 0255
sales@atlan.com.au
100 Silverwater Rd,
Silverwater NSW 2128
atlan.com.au

REFERENCE SHEET - On-lot stormwater drainage

Functional component		Required frequency (months)	Good (condition score - 1)	Moderate (condition score - 2)	Poor (condition score - 3)
1	Downpipes				
1a	Connection to subsurface drainage	36	Secure downpipes. No holes or leaks.	Downpipes showing signs of wear and/or damage (holes, cracks, leaking joints).	Downpipes are unstable and/or not discharging flow to subsurface drainage.
2	Stormwater pits				
2a	Grates / covers	12	Grates / covers are in place not blocked and do not pose a safety hazard.	Grates / covers require adjustment or clearing of blockage.	Grates / covers require repair or replacement due to damage.
2b	Internal	36	No damage or blockage evident.	Minor blockage or evidence of damage (cracking, spalling).	Significant blockage causing loss of conveyance capacity. Damage to pit that poses a risk to structural integrity, safety or function of stormwater system.
3	Stormwater pipes / culverts				
3a	Structural condition	36	No defects or blockage evident	Minor defects evident (e.g., hairline cracks)	Major defects requiring repair (e.g., cracks, concrete spalling, displacement at joints, pipe collapse).
3b	Debris / blockage	36	No blockage evident.	Minor blockage (<15% of pipe / culvert cross-sectional area)	Significant blockage affecting pipe conveyance capacity (>15% of cross-sectional area).

INSPECTION SHEET - On-lot stormwater drainage

Date: _____	Purpose of visit	Rainfall conditions
Location: _____	<input type="checkbox"/> Inspection	<input type="checkbox"/> Rainfall today (___mm)
Asset Name: _____	<input type="checkbox"/> Response to complaint	<input type="checkbox"/> Rainfall in last 3 days (___mm)
Asset ID: _____	<input type="checkbox"/> Other (specify) _____	<input type="checkbox"/> No recent rainfall
Inspected by: _____ (name / company)	_____	

Functional component		Condition score and evidence				
		Circle the score 1, 2, 3 or N/A (not applicable) for each functional component based on good (1), moderate (2) or poor (3) conditions as noted in the reference sheet. Write why the score was given in the Notes section.				
1	Downpipes					
1a	Connection to subsurface drainage	1	2	3	NA	Notes: _____
2	Stormwater pits					
2a	Grates / covers	1	2	3	NA	Notes: _____
2b	Internal	1	2	3	NA	Notes: _____
3	Stormwater pipes / culverts					
3a	Structural condition	1	2	3	NA	Notes: _____
3b	Debris / blockage	1	2	3	NA	Notes: _____

MAINTENANCE SHEET - On-lot stormwater drainage

Date: _____	Purpose of visit	Rainfall conditions
Location: _____	<input type="checkbox"/> Inspection	<input type="checkbox"/> Rainfall today (___mm)
Asset Name: _____	<input type="checkbox"/> Response to complaint	<input type="checkbox"/> Rainfall in last 3 days (___mm)
Asset ID: _____	<input type="checkbox"/> Other (specify) _____	<input type="checkbox"/> No recent rainfall
Inspected by: _____ (name / company)		

Functional component	Maintenance response and information		Maintenance completed		
1 Downpipes					
1a Connection to subsurface drainage	Response: Information:	Y	N	NA	Notes:
2 Stormwater pits					
2a Grates / covers	Response: Information:	Y	N	NA	Notes:
2b Internal	Response: Information:	Y	N	NA	Notes:
3 Stormwater pipes / culverts					
3a Structural condition	Response: Information:	Y	N	NA	Notes:
3b Debris / blockage	Response: Information:	Y	N	NA	Notes:

Functional component		Part C number	Required frequency (months)	Good (condition score - 1)	Moderate (condition score - 2)	Poor (condition score - 3)
Surrounds and other infrastructure						
	Damage or removal of structures	6	6	Stable structures. No damage to structure or surrounding infrastructure. No safety risks.	Minor damage. Does not pose risk to structural integrity or asset function.	Major damage. Poses risk to structural integrity, public safety or asset function.
1	Inlet					
1a	Blockage	3	6	No accumulated solids or minimal solids with no obvious impacts.	Partial blockage of inlet causing some obstruction of flows or requiring removal.	Blockage of inlet preventing or significantly obstructing flows.
2	GPT sump					
2a	Debris, sediment and oil accumulation	7	6	None, or minimal accumulated solids/oil (<10% capacity).	Some accumulated solids/oil (>50% capacity).	Accumulated sediment/oil is reaching capacity (>75% capacity).
3	Screens					
3a	Damage	5	6	No holes or damage to the screen.	Some small holes/light damage. Can still function to filter most gross pollutants.	Large holes/heavy damage to the screen. Gross pollutants can pass through. Screen not securely attached to wall.
3b	Blockage	3	6	No accumulated solids or minimal solids with no obvious impacts.	Partial blockage of screen causing some obstruction of flows or requiring removal.	Blockage of screen preventing or significantly obstructing flows.
4	Outlet					
4a	Blockage	3	6	No blockage.	Partial blockage of outlet causing some obstruction of outflows or requiring removal.	Blockage of outlet preventing or significantly obstructing outflows.

INSPECTION SHEET – Gross pollutant trap (GPT)

Date _____
 Location _____
 Asset name _____
 Asset ID _____
 Inspected by _____
 (name/company)

Purpose of visit

- ☐ Inspection
☐ Response to complaint
☐ Other (specify) _____

Rainfall conditions

- ☐ Rainfall today (___ mm)
☐ Rainfall in last 3 days (___ mm)
☐ No recent rainfall

Functional component		Condition score and evidence				Notes:
		1	2	3	NA	
Surrounds and other infrastructure						
	Damage or removal of structures	1	2	3	NA	
1 Inlet						
1a	Blockage	1	2	3	NA	
2 GPT sump						
2a	Debris, sediment and oil accumulation	1	2	3	NA	
3 Screens						
3a	Damage	1	2	3	NA	
3b	Blockage	1	2	3	NA	
4 Outlet						
4a	Blockage	1	2	3	NA	

Other:

Sheet 1 of 1

Functional component	Part C number	Required frequency (months)	Good (condition score – 1)	Moderate (condition score – 2)	Poor (condition score – 3)
Surrounds and other infrastructure					
	Damage or removal of structures	6	6	Stable structures. No damage to structure or surrounding infrastructure. No safety risks.	Minor damage. Does not pose risk to structural integrity or asset function. Major damage. Poses risk to structural integrity, public safety or asset function.
1	Inlet				
1a	Blockage	3	6	No blockage.	Partial blockage of inlet causing some bypass of flows or restricted inflows. Blockage of inlet causing significant bypass or restriction of inflows.
1b	Erosion	9	6	No erosion.	Minor erosion. Does not pose risk to structural integrity, public safety or asset function (e.g. limited short circuiting of flows). Major erosion. Posing risk to structural integrity, public safety or asset function (e.g. short circuiting of the majority of flows).
2	Storage area				
2a	Storage volume	30	6	No significant sediment accumulation or other volume reduction.	Some sediment accumulated, but no more than 5% of volume has been lost. Sediment or debris accumulation resulting in 5% or more of volume being lost.
2b	Sediment accumulation	27	6	No accumulated sediment or minimal sediment with no obvious impacts.	Some accumulated sediment (covering <50% of surface), causing some redirection of flows through the system. Accumulated sediment (covering >50% of the surface). Significantly impeding flows.
2c	Standing water or boggy conditions	29	6	No standing water.	Standing water visible at time of inspection. Standing water >5% of depth remains more than 12 hours since last rainfall.
3	Outlet (discharge control pit)				
3a	Blockage	3	6	No blockage.	Partial blockage of outlet causing some obstruction of outflows or requiring removal. Blockage of outlet preventing or significantly obstructing outflows.
3b	Screen	26	6	No holes or damage to the screen. No clogging evident.	Some small holes/light damage. Can still function to remove most gross pollutants. Screen not securely attached to the wall of the pit. Large holes/heavy damage to the screen. Gross pollutants can enter the tank. Screen completely detached from the wall of the pit.
3c	Sediment accumulation	27	6	No accumulated sediment or minimal sediment with no obvious impacts.	Some accumulated sediment (covering <50% of surface), causing some redirection of flows through the system. Accumulated sediment (covering >50% of the surface). Significantly impeding flows.
4	Overflow				
4a	Blockage	3	6	No blockage.	Partial blockage of overflow causing some obstruction of outflows or requiring removal. Blockage of overflow preventing or significantly obstructing outflows.
4b	Erosion	9	6	No erosion.	Minor erosion. Does not pose risk to structural integrity, public safety or asset function (e.g. limited short circuiting of flows). Major erosion. Posing risk to structural integrity, public safety or asset function (e.g. short circuiting of the majority of flows).

Date _____
 Location _____
 Asset name _____
 Asset ID _____
 Inspected by _____
 (name/company)

Purpose of visit
☐ Inspection
☐ Response to complaint
☐ Other (specify) _____

Rainfall conditions
☐ Rainfall today (___ mm)
☐ Rainfall in last 3 days (___ mm)
☐ No recent rainfall

Functional component	Condition score and evidence					
Circle the score 1, 2, 3 or NA (not applicable) for each functional component based on good (1), moderate (2), or poor (3) conditions as noted in the reference sheet. Write why the score was given in the 'Notes' section.						
Surrounds and other infrastructure						
	Damage or removal of structures	1	2	3	NA	Notes:
1 Inlet						
1a	Blockage	1	2	3	NA	Notes:
1b	Erosion	1	2	3	NA	Notes:
2 Storage area						
2a	Storage volume	1	2	3	NA	Notes:
2b	Sediment accumulation	1	2	3	NA	Notes:
2c	Standing water or boggy conditions	1	2	3	NA	Notes:
3 Outlet (discharge control pit)						
3a	Blockage	1	2	3	NA	Notes:
3b	Screen	1	2	3	NA	Notes:
3c	Sediment accumulation	1	2	3	NA	Notes:
4 Overflow						
4a	Blockage	1	2	3	NA	Notes:
4b	Erosion	1	2	3	NA	Notes:

Other:

Sheet 1 of 1

Date	_____	Purpose of visit		Rainfall conditions	
Location	_____	<input type="checkbox"/> Maintenance		<input type="checkbox"/> Rainfall today (___ mm)	
Asset name	_____	<input type="checkbox"/> Response to complaint		<input type="checkbox"/> Rainfall in last 3 days (___ mm)	
Asset ID	_____	<input type="checkbox"/> Other (specify) _____		<input type="checkbox"/> No recent rainfall	
Maintained by (name/company)	_____				

Functional component		Maintenance response and information	Maintenance completed <i>Circle Y (yes), N (no) or NA (not applicable) and write what maintenance was done in the 'Notes' section.</i>		
Surrounds and other infrastructure					
	Damage or removal of structures	Response: Rectification works for structural issues to be undertaken immediately. Information: Refer to Works as Executed plans for specifications for structural repairs.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
1 Inlet					
1a	Blockage	Response: Inspect via manhole, pit or inlet. Remove litter, debris and sediment by hand, shovel or machinery. Information: Ensure that water can enter the system freely. Forks and tongs may be used for litter pick ups. Waste must be transported to a waste facility that is appropriately licensed to accept such waste (if there is no opportunity for reuse on-site). A pit is considered a confined space, requiring safety equipment and training.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
1b	Erosion	Response: Re-profiling using hand tools or light machinery. Replant if required. Information: Typically required after heavy rainfall.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
2 Storage area					
2a	Storage volume	Response: Remove any litter, debris and sediment by hand, shovel or machinery. Information: Ensure that the detention volume is maintained as per design. May require personnel with confined space clearance to carry out maintenance tasks. If detention volume is occupied by something else, reconstruct and replace the volume lost. Notify council of proposal.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
2b	Sediment accumulation	Response: If accumulated sediment is present on the surface, remove using a flat shovel and dispose. Information: Waste must be transported to a waste facility that is appropriately licensed to accept such waste (if there is no opportunity for reuse on-site). A pit is considered a confined space, requiring safety equipment and training.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
2c	Standing water or boggy conditions	Response: System should be desilted and screens cleaned. Information: Water should drain away within hours after rain events.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
3 Outlet (discharge control pit)					
3a	Blockage	Response: Inspect via manhole, pit or inlet. Remove litter, debris and sediment by hand, or shovel. Information: Waste must be transported to a waste facility that is appropriately licensed to accept such waste (if there is no opportunity for reuse on-site). A pit is considered a confined space, requiring safety equipment and training.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes:
3b	Screen	Response: Use a broom, hose or high pressure hose to clean screen of debris. Replace screen if required. Information: Remove grate and screen and examine for rust or corrosion, especially at corners or welds.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Notes: