

QUALITY YOU CAN SEE INSIDE AND OUT



Outdoor Building
Solutions®



02

LP® OUTDOOR BUILDING SOLUTIONS®

Engineered to Impress	02
Your Total Shed Package	04

06

LP® SMARTSIDE® TRIM & SIDING

Durability	8
Workability	10
Warranty	11
Sustainability	12
Manufacturing Process	14
LP® SmartSide® Trim & Siding vs. the Competition	15
Product Overview	16

24

LP® PROSTRUCT® PRODUCTS

About LP® ProStruct® Products	25
Roof Sheathing Product Overview	26
Flooring Product Overview	27

28

SPECIFICATIONS

LP® SmartSide® Trim & Siding	30
LP® ProStruct® Roof Sheathing & Flooring	42
LP Structural Solutions®	44
LP® TechShield® Radiant Barrier	45
LP® Legacy® Premium Sub-Flooring	45

46

**MARKETING SUPPORT
NOTES**

46
48

ENGINEERED TO IMPRESS

A PIONEER OF CHANGE

LP has redefined traditional building materials with treated engineered wood products that are designed to offer game-changing durability, beauty and workability. LP is a building industry leader in a category that is shaping the way homes and outdoor building structures are being built.

LP® Outdoor Building Solutions® proudly offers a complete portfolio of products to help you build better outdoor structures with exceptional durability, curb appeal, and added value for your business. As the only manufacturer with an outdoor building solutions portfolio, LP is committed to supporting the needs of shed builders and manufacturers with our products.



YOUR TOTAL SHED PACKAGE

**LP® ProStruct®
Roof Sheathing
with SilverTech®**
Keeps your shed's interior
cooler and brighter

**LP® SmartSide®
Panel Siding**
Offers a brighter,
cleaner look. Available
with SmartFinish® and
SilverTech® technology

**LP® SmartSide®
Trim & Siding**
Gives sheds the look of true
craftsmanship in both cedar
texture and smooth finish

**LP® ProStruct®
Flooring with
SmartFinish®**
Offers a tough, pro-grade
flooring finish

GIVE YOUR CUSTOMERS MORE WITH INNOVATIVE LP PRODUCTS

LP® Outdoor Building Solutions® treated engineered wood products feature innovations that help your sheds last longer and offer additional benefits. With innovations like LP® SmartSide® Panel Siding with SilverTech® for a clean and bright appearance and LP® ProStruct® Flooring with SmartFinish® for a tough, durable floor developed specifically for sheds, LP Outdoor Building Solutions products give your customers quality they can see inside and out.



ADVANCED DURABILITY FOR LONGER LASTING BEAUTY®

LP® SmartSide® Trim & Siding isn't designed only to be a durable, beautiful siding option for homes—it can provide the same benefits for a backyard shed. With four components of protection, the LP® SmartGuard® process adds strength and helps LP® SmartSide® products withstand impacts, damage from freeze/thaw cycles, high humidity, fungal decay and more. In addition to LP SmartSide Trim & Siding, LP® SmartSide® Panel Siding with SilverTech® and LP® SmartSide® Panel Siding with SmartFinish® were developed specifically for sheds.

BECAUSE STRENGTH IS MAKE OR BREAK



A NATURAL DEFENSE AGAINST NATURE

All LP® SmartSide® products are treated to the core through our proprietary SmartGuard® process. With four components of protection, the SmartGuard process adds strength and helps LP SmartSide products withstand impacts, freeze/thaw cycles, high humidity, fungal decay and more.

See more about how LP SmartSide products are made at [YouTube.com/LPSmartSide](https://www.youtube.com/LPSmartSide).



FOUR COMPONENTS OF PROTECTION

LP's proprietary SmartGuard® manufacturing process ensures that every LP SmartSide Trim & Siding product is treated with an advanced formula of adhesive resins, water-resistant waxes and zinc borate, after which a water-resistant, resin-saturated overlay is bonded to the product. The result: four components of protection against termites and fungal decay.



RESINS




WAXES



ZINC



OVERLAY

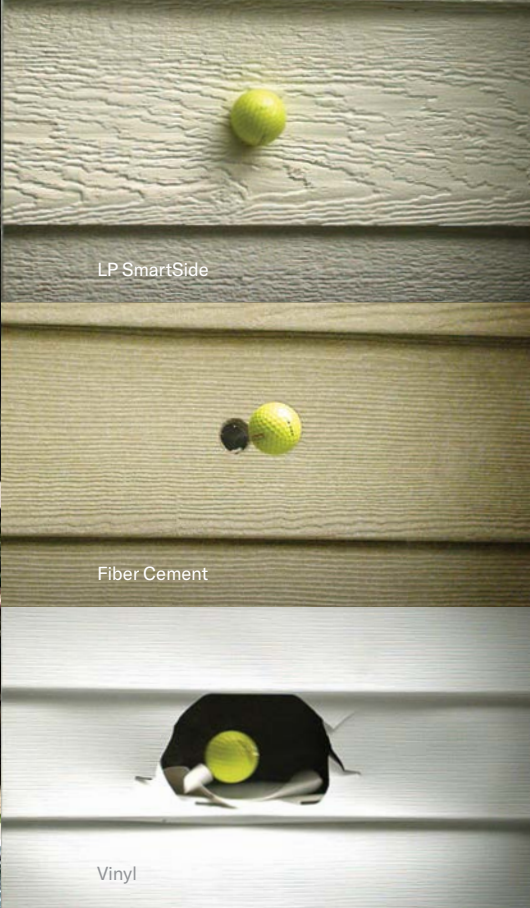

OUTSTANDING IMPACT RESISTANCE

Testing shows that LP SmartSide strand products resist impact better than vinyl and fiber cement siding, which means they can stand up better against everything from everyday bumps to airborne storm debris. And because it doesn't break as easily as fiber cement siding, LP SmartSide siding is also easier to handle and install, and results in less waste.



HAIL AND WIND RESISTANCE

Third-party test results demonstrate that LP SmartSide lap siding resisted hail damage better than fiber cement and vinyl. In fact, the LP SmartSide warranty covers impacts from hail up to 1.75" in diameter. LP SmartSide lap siding is also designed to withstand tough storms with wind gusts of up to 200 miles per hour. Refer to ESR-1301, Table 2B, Lap Siding.



RESISTANCE TO FUNGAL DECAY AND TERMITES

Since 1996, LP SmartSide substrate siding has undergone brutal testing in Hilo, Hawaii. An average temperature of more than 70 degrees, high levels of humidity, and almost 170 inches of annual rainfall* make Hilo's climate the perfect breeding ground for termites, moisture and fungal decay. Yet our Exterior Exposure Program continues to validate that LP SmartSide siding performs over time.



WORKS THE WAY WOOD IS SUPPOSED TO

LP® SmartSide® treated engineered wood siding cuts out the time you spend dealing with warped and split pieces when properly stored and applied.

MAKES BUILDING EASIER, FASTER, MORE EFFICIENT

LP® SmartSide® Trim & Siding cuts with standard woodworking tools. LP SmartSide products weigh less, resist breakage during handling and can make installation more efficient. Plus, LP SmartSide products come pre-primed and ready to paint to help you save time.

LP HAS WORKABILITY NAILED

- Works and cuts like traditional wood
- Weighs less, easier to carry, less breakage than fiber cement
- Longer lengths may mean fewer seams and less waste

Watch our [How It's Made](#) videos to see how LP makes treated engineered wood products last longer at [YouTube.com/LPSmartSide](#).

BACKED BY A STRONG WARRANTY

LP has your back with industry-leading limited warranties for our engineered wood products. When you build with LP, you can build with confidence and gain peace of mind that the products you choose will perform and serve your project well.



LP SMARTSIDE TRIM & SIDING LIMITED WARRANTY

Includes SmartSide lap and panel siding, shake, trim, fascia, soffit and more.

PROTECTS MORE

The LP SmartSide warranty covers three main areas of potential damage so you can have peace of mind with the product.



Fungal Decay & Termites

Treated with waxes, resins and zinc borate to help resist fungal decay and termite damage



Hail Damage

Resists damage from hail up to 1.75 inches in diameter



Structure

Resists buckling, peeling, cracking, chipping and more

WARRANTY INFORMATION

To apply the LP SmartSide limited warranty, contact LP within 90 days of discovering a possible issue with your product and before beginning any permanent repair.

Visit [LPCorp.com/Warranties](#) for more information or call (844) 557-7433.

GROW WITH US

A SMART CHOICE FOR OUR PLANET

LP® SmartSide® Trim & Siding products are must-have materials to help builders qualify for green building programs. Plus, many homeowners and building owners are demanding sustainable products that have minimal impact on our environment.



NATURALLY SUSTAINABLE

The LP® SmartSide® manufacturing process begins with wood, a renewable resource, grown and gathered under strict Sustainable Forestry Initiative® (SFI) standards. We target fast-growing trees and use 99% of the log for either the product or the fuel to make it. Plus, all binding agents and resins are low-emitting.

We're not just building for the future; we're helping to protect it by using SFI certified forest management and fiber sourcing systems to help ensure that our wood comes from well-managed forests.


RESPONSIBLY MADE WITH WOOD

- Responsibly made with a renewable resource—wood
- 99% of the log is used
- Qualifies for green building programs

Learn more about LP's environmental programs at [LPCorp.com](https://www.lpcorp.com).

HOW TREATED ENGINEERED WOOD SIDING AND TRIM ARE MADE

LP incorporates continuous quality control and testing measures during the manufacturing process.

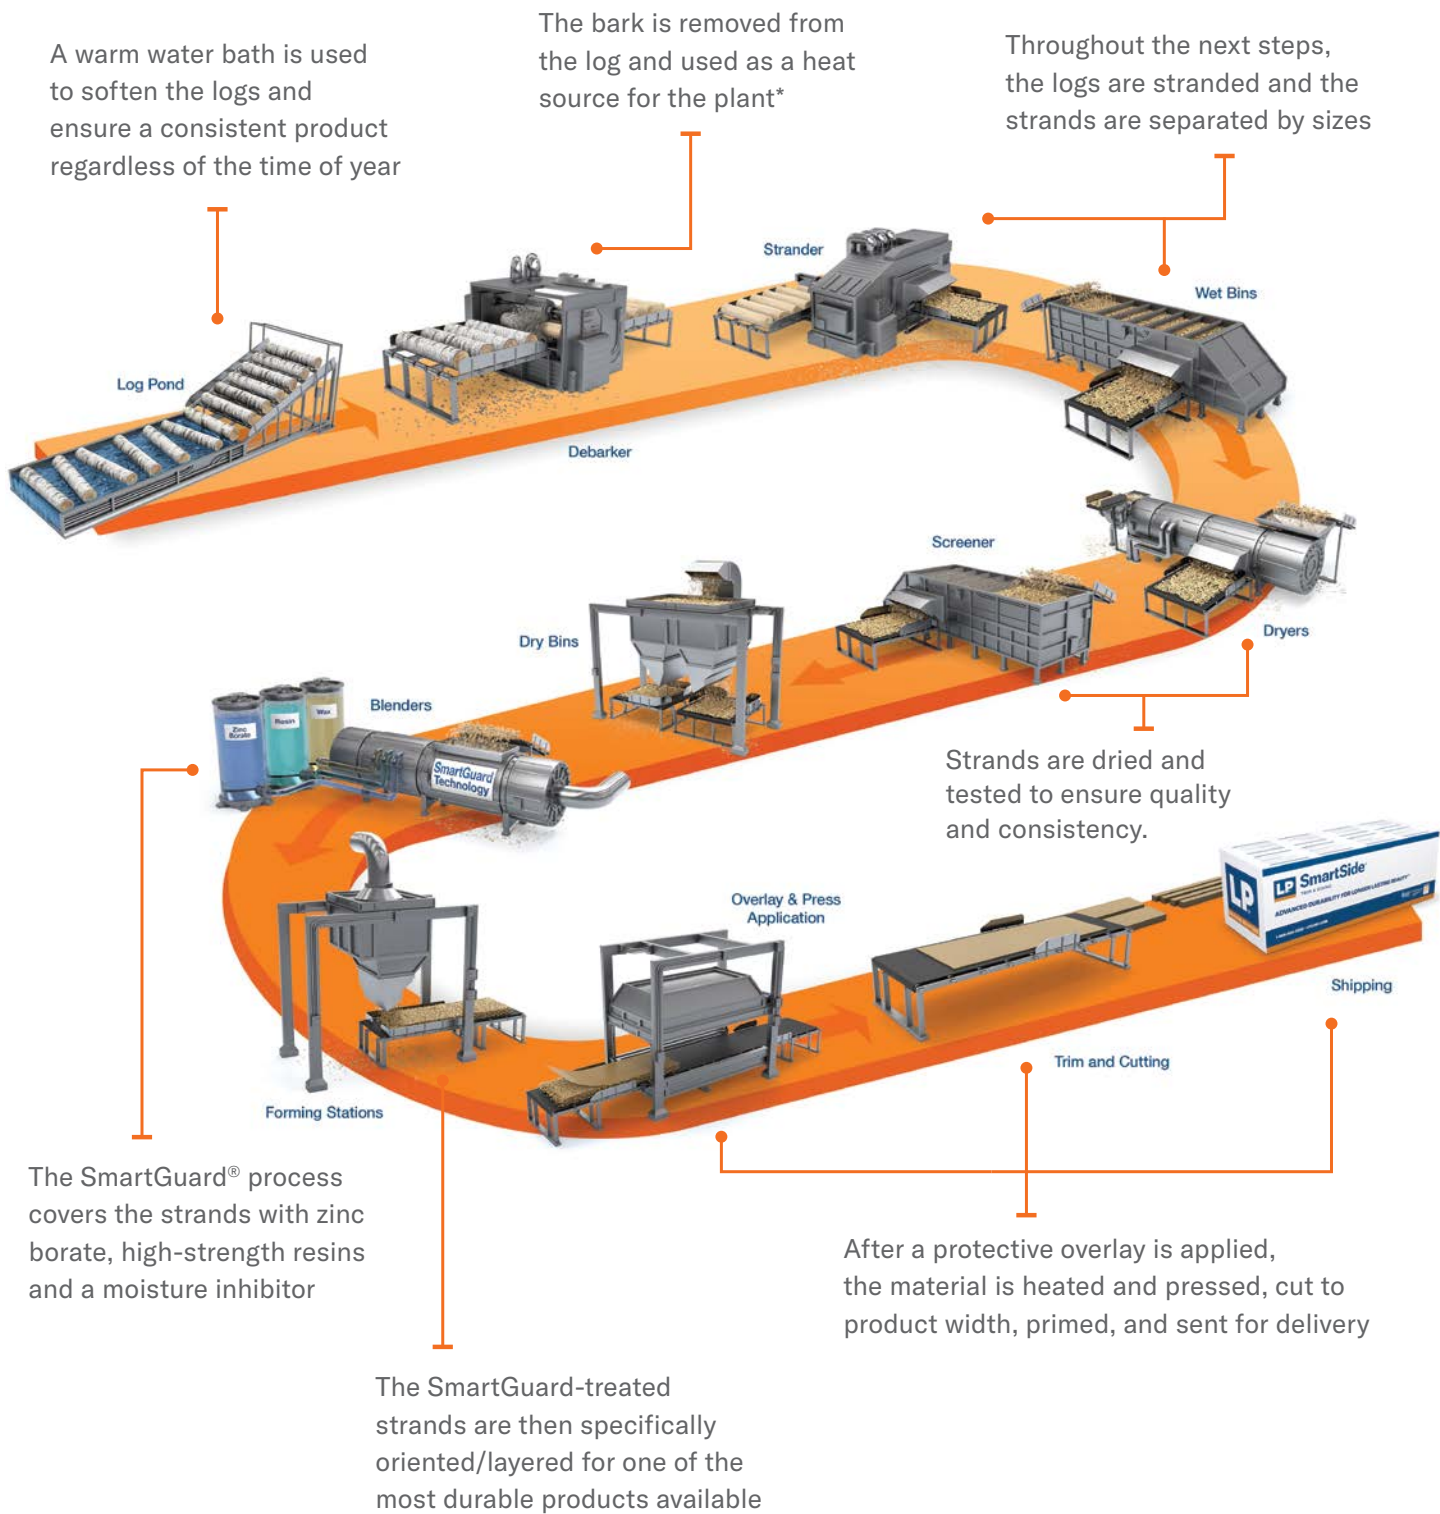

*99% of waste is reused in the manufacturing process and/or fueling the mill operation

LP® SMARTSIDE® TREATED ENGINEERED WOOD VS. THE COMPETITION

WALLS

	SmartSide® Panel and SmartSide Panel with SilverTech® & SmartFinish®	Untreated T-111 Plywood	26-Gauge Galvanized Metal	0.044" Vinyl
Treated with SmartGuard Process*				
Free of Knots, Patches, and Face Voids	✓		✓	✓
Comprehensive 5/50-year Limited Warranty*				
Resists Fungal Decay	✓		✓	✓
Resists Termites	✓		✓	✓
Resists Face Splitting and Cracking	✓		✓	✓
Rich Cedar Grain Exterior Texture	✓			
SmartFinish and SilverTech Interior Finish Options	✓			
Superior Dent Resistance	✓	✓	✓	

*See LPCorp.com/Shed for complete warranty details



Featured: LP® SmartSide® Panel Siding and Trim




Featured: LP® SmartSide® Panel Siding with SmartFinish®

PROTECT YOUR SHED WITH DURABLE PANEL SIDING

LP® SmartSide® Panel Siding offers the workability, durability and the aesthetic you would expect from LP. It's a smart choice when you want a shed product that comes backed with an outstanding limited warranty. Each panel is manufactured with the SmartGuard® process for protection against fungal decay and termites, and the panels offer exceptional impact resistance. As a desirable upgrade from T1-11, LP SmartSide panel siding resists warping, splitting and cupping and arrives ready to use, free of knots, patches and face voids.



CEDAR TEXTURE PANEL



STRAND SUBSTRATE

UPGRADE SHEDS WITH A FINISHED INTERIOR

We designed LP® SmartSide® Panel Siding with SmartFinish® to include a durable overlay that gives the inside of shed walls a clean, finished appearance. It installs just as quickly as traditional paneling while offering a finished look on the inside. Perfect for workshops or playhouses.



CEDAR TEXTURE PANEL



SMARTFINISH



Featured: LP® SmartSide® Panel Siding with SilverTech® and LP® ProStruct® Flooring with SmartFinish®



Featured: LP SmartSide Vertical Siding & Trim*

BRIGHTEN AND COOL YOUR SHED INTERIOR


Innovative LP® SmartSide® Panel Siding with SilverTech® features a radiant barrier that leads to a clean and bright appearance in addition to all the benefits of LP SmartSide Panel Siding. It leads to a finished look that resists flaking and peeling and represents an ideal material choice for brighter interiors.



8" CEDAR TEXTURE PANEL



4" OC CEDAR TEXTURE PANEL***



SILVERTECH

ALIGN YOUR SHED'S LOOK WITH POPULAR STYLES

LP® SmartSide® Vertical Siding** lets you re-create the charming appearance of board and batten while providing the added protection of the SmartGuard® process.



CEDAR TEXTURE VERTICAL SIDING



SMOOTH FINISH VERTICAL SIDING



Featured: LP® SmartSide® Lap Siding



Featured: LP® SmartSide® Cedar Texture Shakes, Panel Siding and Trim

PUT YOUR CRAFTSMANSHIP ON DISPLAY

Available in cedar texture or smooth finish, LP® SmartSide® Lap Siding boasts Advanced Durability for Longer Lasting Beauty®. It's a great option for building premium sheds that complement customers' homes. You'll have the versatility to create a wide range of looks and put your craftsmanship on display.



CEDAR TEXTURE LAP



SMOOTH FINISH LAP

TAKE CURB APPEAL TO THE NEXT LEVEL

When you use LP® SmartSide® Cedar Texture Shakes on your projects, people will notice your attention to every detail. This beautiful aesthetic can be used for accents, gables or siding walls and will take curb appeal to the next level. It's a must-have product for when you want your craftsmanship to stand out on any home or shed.



CEDAR TEXTURE SHAKES*



Featured: LP® SmartSide® Trim and Panel Siding



Featured: LP® SmartSide® Vented Soffit and Lap Siding

SET YOUR SHED APART WITH DETAIL AND DESIGN

LP® SmartSide® Trim is the finishing touch that's the first to get noticed. With its smooth finish or deep cedar-grain texture and variety of widths and thicknesses, you can add custom design accents that take curb appeal to the next level. As a must-have product for helping your craftsmanship stand out, LP SmartSide trim can also be used to create the board and batten siding style.



CEDAR TEXTURE TRIM



SMOOTH FINISH TRIM



NEW OUTSIDE CORNERS (PRIMED)

STAND OUT WITH FINISHING TOUCHES

When you use LP® SmartSide® Soffit on your projects, people will notice your attention to every detail. You'll get the same woodgrain or smooth look that matches other LP SmartSide products in a soffit that's pre-cut to the width you need. Vented soffits are also available with precisely cut, bug-resistant vents. All LP SmartSide Soffit products are treated engineered wood strand products and come pre-primed for exceptional paint adhesion.



CEDAR TEXTURE SOFFIT



SMOOTH FINISH SOFFIT



VENTED SOFFIT



FLOORING & ROOFING PRODUCTS FOR ELEVATED, PROFESSIONAL-GRADE SHEDS

Take your shed's roofing and flooring to the next level with LP® ProStruct® products. Built to offer a professional-grade appearance with additional features that make your sheds more appealing, brighter and cooler, LP ProStruct products help to elevate the overall quality of your shed builds. LP ProStruct products are backed by strong warranties, including a 20-year limited materials warranty for LP® ProStruct® Roof Sheathing with SilverTech® and a 1/10-year limited warranty for LP® ProStruct® Flooring with SmartFinish®.



Featured: LP® ProStruct® Roof Sheathing with SilverTech®



Featured: LP® ProStruct® Flooring with SmartFinish®

A BRIGHTER, COOLER SHED STARTS AT THE ROOF

LP® ProStruct® Roof Sheathing with SilverTech® features a durable radiant barrier that helps keep sheds or other outdoor structures cooler in the summer heat. With its highly reflective, professional-grade appearance, LP ProStruct Roof Sheathing with SilverTech helps brighten the inside for better visibility. The product is also backed by a strong 20-year limited materials warranty.



ROOF SHEATHING WITH SILVERTECH



AN ATTRACTIVE FLOORING FINISH FOR SHEDS

As flooring warranted specifically for sheds, LP® ProStruct® Flooring with SmartFinish® features a durable overlay for a beautiful, professional-grade appearance. With no knots or voids, it's a welcome change from building with traditional plywood flooring. Plus, unlike plywood shed floors, LP ProStruct Flooring with SmartFinish is treated with the LP SmartGuard® process for longer-lasting performance in tough climates. The product is also backed by a 1/10-year limited materials warranty.



FLOORING WITH SMARTFINISH



TAKE A CLOSER LOOK

GET THE DETAILS ON ALL SHED PRODUCTS


The products you'll need for a complete shed build come in a variety of lengths, widths, textures and profiles, so there's an ideal product for any set of needs. Each one has its own combination of advantages. Explore the details and identify the exact products you'll need on the following pages.




PANEL SIDING

RATED FOR STRUCTURAL USE BY APA


- Desirable upgrade from T1-11
- Select panel siding options offer shiplap edges with advanced bead system for easier alignment (see profiles)
- Pre-primed for exceptional paint adhesion
- Strong enough to be nailed directly to stud, making additional sheathing unnecessary in many applications
- Eliminates need for additional bracing on load-bearing walls
- Treated engineered wood strand substrate

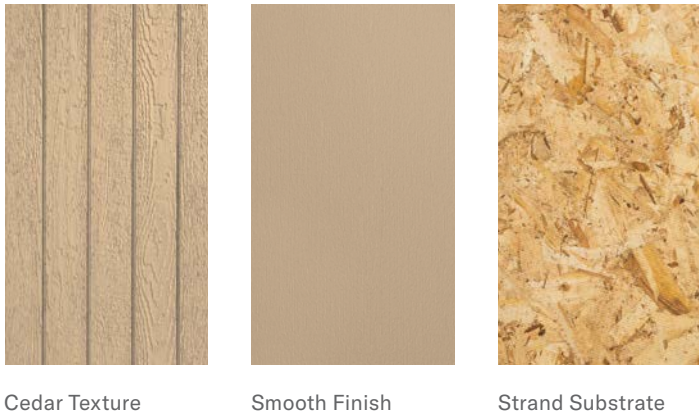


38 SERIES CEDAR TEXTURE – NO GROOVE DUAL USE SIDING AND SOFFIT PANEL




38 SERIES SMOOTH FINISH – NO GROOVE




GROOVE DETAIL




38 SERIES CEDAR TEXTURE PANEL 8” O.C.




38 SERIES CEDAR TEXTURE PANEL – NO GROOVE




76 SERIES CEDAR TEXTURE PANEL 4” & 8” O.C.




76 SERIES CEDAR TEXTURE PANEL – NO GROOVE



190 SERIES CEDAR TEXTURE PANEL 8” O.C.

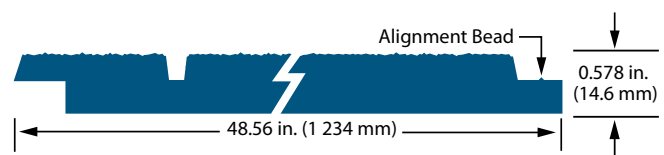

190 SERIES CEDAR TEXTURE PANEL – NO GROOVE

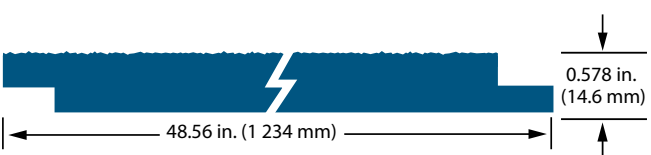

DESCRIPTION	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
38 Series Cedar Texture Panel 8" o.c.	6 ft. (72 in.)(1.8 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	27805	1.5 PSF
	7 ft. (84 in.)(2.1 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	27806	1.5 PSF
	8 ft. (96 in.)(2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	25840	1.5 PSF
	9 ft. (108 in.)(2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	25843	1.5 PSF
	10 ft. (120 in.)(3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	25844	1.5 PSF
38 Series Cedar Texture Panel No Groove	8 ft. (96 in.)(2.4 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	25855 *	1.5 PSF
	9 ft. (108 in.)(2.7 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	29189 *	1.5 PSF
	10 ft. (120 in.)(3.0 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	25825 *	1.5 PSF
38 Series Smooth Finish Panel No Groove	8 ft. (96 in.)(2.4 m)	No Groove	N/A	47.88 in. (1 216 mm)	0.354 in. (8.9 mm)	43088	1.5 PSF
38 Series Cedar Texture Siding and Soffit Panel No Groove	8 ft. (96 in.)(2.4 m)	No Groove	N/A	47.88 in. (1 216 mm)	0.354 in. (8.9 mm)	41044	1.5 PSF
76 Series Cedar Texture Panel 4" and 8" o.c.	8 ft. (96 in.)(2.4 m)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25831	1.5 PSF
	9 ft. (108 in.)(2.7 m)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25832 *	1.5 PSF
	10 ft. (120 in.)(3.0 m)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25833 * (Discontinued)	1.5 PSF
	8 ft. (96 in.)(2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25848	1.5 PSF
	9 ft. (108 in.)(2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25850	1.5 PSF
	10 ft. (120 in.)(3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25851	1.5 PSF
	8 ft. (96 in.)(2.4 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25856	1.5 PSF
	9 ft. (108 in.)(2.7 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25857	1.5 PSF
76 Series Cedar Texture Panel No Groove	10 ft. (120 in.)(3.0 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	25858	1.5 PSF
	8 ft. (96 in.)(2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.578 in. (14.6 mm)	25852	2 PSF
	9 ft. (108 in.)(2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.578 in. (14.6 mm)	25853 *	2 PSF
190 Series Cedar Texture 8" o.c.	10 ft. (120 in.)(3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.578 in. (14.6 mm)	25854 *	2 PSF
	8 ft. (96 in.)(2.4 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.578 in. (14.6 mm)	25859 *	2 PSF
	9 ft. (108 in.)(2.7 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.578 in. (14.6 mm)	25860 *	2 PSF
190 Series Cedar Texture Panel No Groove	10 ft. (120 in.)(3.0 m)	No Groove	N/A	48.56 in. (1 234 mm)	0.578 in. (14.6 mm)	25861 *	2 PSF

CEDAR TEXTURE PANEL SIDING WITH SMARTFINISH®

RATED FOR STRUCTURAL USE BY APA

- Innovative SmartFinish adds a durable, attractive appearance on the inside
- Shiplap edges with advanced bead system for easier alignment
- Pre-primed for exceptional paint adhesion
- Strong enough to be nailed directly to stud, making additional sheathing unnecessary in many applications
- Eliminates need for additional bracing on load-bearing walls
- Treated engineered wood strand substrate
- Uniquely designed for use on outdoor structures




Cedar Texture




Interior SmartFinish

38 SERIES CEDAR TEXTURE PANEL 8" O.C.



76 SERIES CEDAR TEXTURE PANEL 8" O.C.



DESCRIPTION	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	PSF
38 Series Cedar Texture Panel with SmartFinish 8" o.c.	7 ft. (84 in.)(2.1 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	30956 (Discontinued)	1.5 PSF
	8 ft. (96 in.)(2.4 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	30922 (Discontinued)	1.5 PSF
	10 ft. (120 in.)(3.0 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	31246 (Discontinued)	1.5 PSF
76 Series Cedar Texture Panel with SmartFinish 8" o.c.	8 ft. (96 in.)(2.4 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	30898	1.5 PSF
	10 ft. (120 in.)(3.0 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	31002 *	1.5 PSF

CEDAR TEXTURE PANEL SIDING WITH SILVERTECH®

RATED FOR STRUCTURAL USE BY APA

- Highly reflective radiant barrier that helps cool and brighten the interior
- Label-free, professional-grade finish resists peeling and flaking
- Shiplap edges with advanced bead system for easier alignment
- Pre-primed for exceptional paint adhesion
- Strong enough to be nailed directly to stud, making additional sheathing unnecessary in many applications
- Eliminates need for additional bracing on load-bearing walls
- Treated engineered wood strand substrate
- Uniquely designed for use on outdoor structures




Cedar Texture




Interior SilverTech

38 SERIES CEDAR TEXTURE PANEL 8" O.C.



76 SERIES CEDAR TEXTURE PANEL 4" & 8" O.C.



DESCRIPTION	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	PSF
38 Series Cedar Texture Panel with SilverTech 8" o.c.	7 ft. (84 in.)(2.1 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	29805	1.5 PSF
	8 ft. (96 in.)(2.4 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.354 in. (8.9 mm)	29633	1.5 PSF
76 Series Cedar Texture Panel 4" o.c.	8 ft. (96 in.)(2.4 mm)	4 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	41266	1.5 PSF
76 Series Cedar Texture Panel with SilverTech 8" o.c.	7 ft. (84 in.)(2.1 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	29631	1.5 PSF
	8 ft. (96 in.)(2.4 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	29524	1.5 PSF
	10 ft. (120 in.)(3.0 mm)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1 234 mm)	0.418 in. (10.6 mm)	29629	1.5 PSF


Specifications: LP® SmartSide® Vertical Siding

VERTICAL SIDING

RE-CREATE THE LOOK OF BOARD & BATTEN


- 16’ lengths can help horizontal joints
- Coordinates with LP SmartSide Trim
- Pre-primed for exceptional paint adhesion
- Treated engineered wood strand substrate
- Not rated for structural use*

*Vertical Siding must be applied over min. 7/16 Category Wood Structural Panel.
See Technical Note #028.

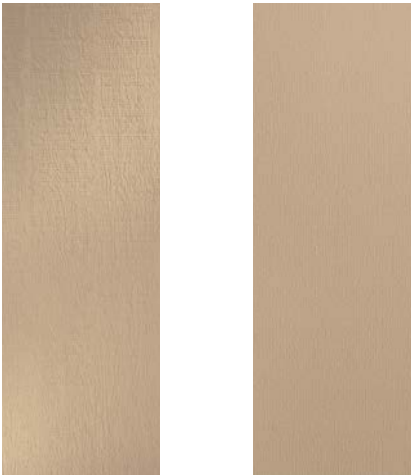

Cedar Texture Smooth Finish

VERTICAL SIDING



DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
38 Series Cedar Texture Vertical Siding	16 ft. (192 in.)(4.9 m)	15.94 in. (405 mm)	0.354 in. (8.9 mm)	40503	1.5 PSF
38 Series Smooth Finish Vertical Siding	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (8.9 mm)	42126	1.5 PSF

Specifications: LP® SmartSide® Outside Corners

NEW OUTSIDE CORNERS

ENGINEERED TO CREATE A SEAMLESS CORNER LOOK

- Pre-primed for exceptional paint adhesion
- Designed to help prevent water intrusion
- One-piece trim corners eliminate the need to build corners on the jobsite
- Faster and easier installation



NEW OUTSIDE CORNERS

DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
540 Series Cedar Texture Outside Corner Trim	10 ft. (120 in.)(3.0 m)	3.50 in. (89 mm)	0.970 in. (24.6 mm)	42098	-
	10 ft. (120 in.)(3.0 m)	5.50 in. (140 mm)	0.970 in. (24.6 mm)	42099	-

Specifications: LP® SmartSide® Lap Siding

CEDAR TEXTURE LAP SIDING


APA-CERTIFIED LAP SIDING

- One of the more durable lap siding options on the market today
- 16’ length can result in faster installation
- May create fewer seams than traditional 12’ siding
- Pre-primed for exceptional paint adhesion
- Self-aligning SmartLock™ option eliminates the need to measure and set lap reveal; eliminating this step in the process is likely to speed up the installation process
- Treated engineered wood strand substrate




Cedar Texture


38 SERIES CEDAR TEXTURE LAP



76 SERIES CEDAR TEXTURE LAP



76 SERIES SMARTLOCK CEDAR TEXTURE LAP




DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
38 Series Cedar Texture Lap	12 ft. (144 in.)(3.7 m)	7.84 in. (199 mm)	0.354 in. (8.9 mm)	28869	1.5 PSF
	16 ft. (192 in.)(4.9 m)	5.84 in. (148 mm)	0.354 in. (8.9 mm)	25796	1.5 PSF
	16 ft. (192 in.)(4.9 m)	6.84 in. (174 mm)	0.354 in. (8.9 mm)	40610	1.5 PSF
	16 ft. (192 in.)(4.9 m)	7.84 in. (199 mm)	0.354 in. (8.9 mm)	25797	1.5 PSF
	16 ft. (192 in.)(4.9 m)	11.84 in. (301 mm)	0.354 in. (8.9 mm)	25799	1.5 PSF
76 Series Cedar Texture Lap	16 ft. (192 in.)(4.9 m)	5.84 in. (148 mm)	0.418 in. (10.6 mm)	25785 (Discontinued)	1.5 PSF
	16 ft. (192 in.)(4.9 m)	7.84 in. (199 mm)	0.418 in. (10.6 mm)	25786	1.5 PSF
	16 ft. (192 in.)(4.9 m)	11.84 in. (301 mm)	0.418 in. (10.6 mm)	25787	1.5 PSF
76 Series SmartLock Cedar Texture Lap	16 ft. (192 in.)(4.9 m)	7.84 in. (199 mm)	0.418 in. (10.6 mm)	30317	1.5 PSF

SMOOTH FINISH LAP SIDING


APA-CERTIFIED LAP SIDING

- Holds up in extreme weather, including moisture, hail, freeze/thaw cycles, and up to 200 mph wind gusts
- Treated with the SmartGuard® process for superior protection against fungal decay and termites
- 16’ length can result in faster installation and fewer seams
- Pre-primed for exceptional paint adhesion
- Backed by an industry-leading 5/50-year limited warranty
- Treated engineered wood strand substrate

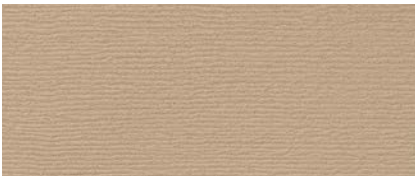

Smooth Finish

38 SERIES SMOOTH FINISH LAP



DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
38 Series Smooth Finish Lap	16 ft. (192 in.)(4.9 m)	5.84 in. (148 mm)	0.354 in. (8.9 mm)	41338	1.5 PSF
	16 ft. (192 in.)(4.9 m)	7.84 in. (199 mm)	0.354 in. (8.9 mm)	41339	1.5 PSF
	16 ft. (192 in.)(4.9 m)	11.84 in. (301 mm)	0.354 in. (8.9 mm)	41340	1.5 PSF

CEDAR TEXTURE SHAKES

REVERSIBLE STAGGERED OR STRAIGHT EDGES OFFER EXCEPTIONAL DESIGN VERSATILITY

- The look of traditional cedar with easier maintenance over time
- Staggered edges offer a lively, textured effect
- Can be used on all exterior walls or as a decorative accent
- Shiplap ends for seamless appearance
- Treated engineered wood strand substrate




Staggered



Straight

38 SERIES CEDAR TEXTURE SHAKES

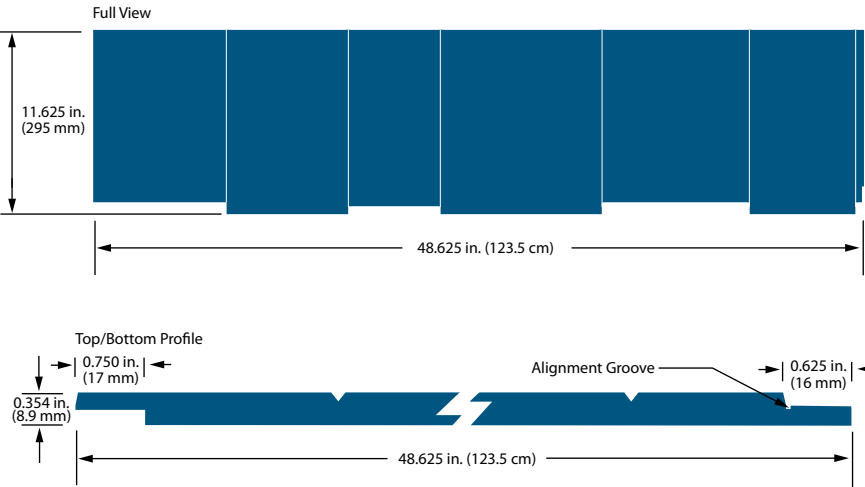

DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
36 Series Cedar Texture Shakes	4ft. (48.63 in.)(1.2 m)	11.625 in. (295 mm)	0.354 in. (8.9 mm)	42092	2 PSF

CEDAR TEXTURE TRIM


A DURABLE, FINISHED LOOK IN CLASSIC CEDAR

- Interior or exterior use, including corner boards, windows and doors
- Narrow widths save cutting time
- Pre-primed for exceptional paint adhesion
- 16’ length can result in faster installation and fewer seams
- Treated with the SmartGuard® process for superior protection against fungal decay and termites




Cedar Texture


190 SERIES CEDAR TEXTURE TRIM




440 SERIES CEDAR TEXTURE TRIM



540 SERIES CEDAR TEXTURE TRIM

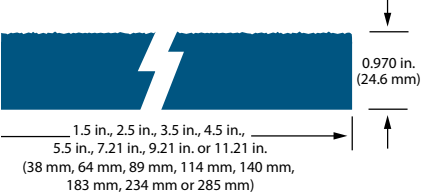

440 SERIES CEDAR TEXTURE PLOUGHED FASCIA




DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
190 Series Cedar Texture Trim	16 ft. (192 in.)(4.9 m)	2.50 in. (64 mm)	0.578 in. (14.6 mm)	28448	2 PSF
	16 ft. (192 in.)(4.9 m)	3.50 in. (89 mm)	0.578 in. (14.6 mm)	28450	2 PSF
	16 ft. (192 in.)(4.9 m)	5.50 in. (140 mm)	0.578 in. (14.6 mm)	28452	2 PSF
440 Series Cedar Texture Trim	16 ft. (192 in.)(4.9 m)	1.50 in. (38 mm)	0.675 in. (17.1 mm)	25877	2 PSF
	16 ft. (192 in.)(4.9 m)	2.50 in. (64 mm)	0.675 in. (17.1 mm)	25878	2 PSF
	16 ft. (192 in.)(4.9 m)	3.50 in. (89 mm)	0.675 in. (17.1 mm)	25880	2 PSF
	16 ft. (192 in.)(4.9 m)	5.50 in. (140 mm)	0.675 in. (17.1 mm)	25882	2 PSF
	16 ft. (192 in.)(4.9 m)	7.21 in. (183 mm)	0.675 in. (17.1 mm)	25883	2 PSF
	16 ft. (192 in.)(4.9 m)	9.21 in. (234 mm)	0.675 in. (17.1 mm)	25884	2 PSF
540 Series Cedar Texture Trim	16 ft. (192 in.)(4.9 m)	11.21 in. (285 mm)	0.675 in. (17.1 mm)	25885	2 PSF
	16 ft. (192 in.)(4.9 m)	1.50 in. (38 mm)	0.970 in. (24.6 mm)	25886 *	3 PSF
	16 ft. (192 in.)(4.9 m)	2.50 in. (64 mm)	0.970 in. (24.6 mm)	25887 *	3 PSF
	16 ft. (192 in.)(4.9 m)	3.50 in. (89 mm)	0.970 in. (24.6 mm)	25888	3 PSF
	16 ft. (192 in.)(4.9 m)	4.50 in. (114 mm)	0.970 in. (24.6 mm)	25889 *	3 PSF
	16 ft. (192 in.)(4.9 m)	5.50 in. (140 mm)	0.970 in. (24.6 mm)	25890	3 PSF
440 Series Cedar Texture Ploughed Fascia	16 ft. (192 in.)(4.9 m)	7.21 in. (183 mm)	0.970 in. (24.6 mm)	25891	3 PSF
	16 ft. (192 in.)(4.9 m)	9.21 in. (234 mm)	0.970 in. (24.6 mm)	25892	3 PSF
	16 ft. (192 in.)(4.9 m)	11.21 in. (285 mm)	0.970 in. (24.6 mm)	25893	3 PSF
	16 ft. (192 in.)(4.9 m)	5.50 in. (140 mm)	0.675 in. (17.1 mm)	27240 *	2 PSF
	16 ft. (192 in.)(4.9 m)	7.21 in. (183 mm)	0.675 in. (17.1 mm)	27819 *	2 PSF
	16 ft. (192 in.)(4.9 m)				

SMOOTH FINISH TRIM


ADD A CLEAN, CRISP FINISHING TOUCH

- Holds up in extreme weather, including moisture, hail, freeze/thaw cycles, and up to 200 mph wind gusts
- Treated with the SmartGuard® process for superior protection against fungal decay and termites
- 16’ length can result in faster installation and fewer seams
- Pre-primed for exceptional paint adhesion
- Backed by an industry-leading 5/50-year limited warranty
- Treated engineered wood strand substrate

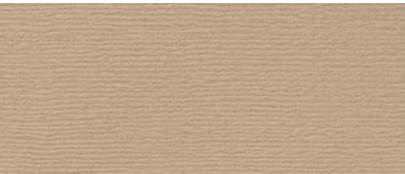


Smooth Finish

440 SERIES SMOOTH FINISH TRIM



540 SERIES SMOOTH FINISH TRIM

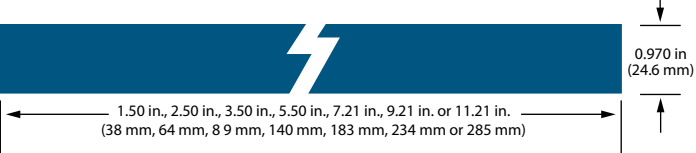


DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
440 Series Smooth Finish Trim	16 ft. (192 in.)(4.9 m)	1.50 in. (38 mm)	0.675 in. (17.1 mm)	41640	2 PSF
	16 ft (192 in.) (4.9 m)	2.50 in. (64 mm)	0.675 in. (17.1 mm)	41627	2 PSF
	16 ft. (192 in.)(4.9 m)	3.50 in. (89 mm)	0.675 in. (17.1 mm)	41420	2 PSF
	16 ft. (192 in.)(4.9 m)	5.50 in. (140 mm)	0.675 in. (17.1 mm)	41422	2 PSF
	16 ft. (192 in.)(4.9 m)	7.21 in. (183 mm)	0.675 in. (17.1 mm)	41423	2 PSF
	16 ft. (192 in.)(4.9 m)	9.21 in. (234 mm)	0.675 in. (17.1 mm)	41492	2 PSF
540 Series Smooth Finish Trim	16 ft. (192 in.)(4.9 m)	11.21 in. (285 mm)	0.675 in. (17.1 mm)	41490	2 PSF
	16 ft. (192 in.)(4.9 m)	1.50 in. (38 mm)	0.970 in. (24.6 mm)	41629	3 PSF
	16 ft. (192 in.)(4.9 m)	2.50 in. (64 mm)	0.970 in. (24.6 mm)	41628	3 PSF
	16 ft. (192 in.)(4.9 m)	3.50 in. (89 mm)	0.970 in. (24.6 mm)	41342	3 PSF
	16 ft. (192 in.)(4.9 m)	5.50 in. (140 mm)	0.970 in. (24.6 mm)	41343	3 PSF
	16 ft. (192 in.)(4.9 m)	7.21 in. (183 mm)	0.970 in. (24.6 mm)	41344	3 PSF
	16 ft. (192 in.)(4.9 m)	9.21 in. (234 mm)	0.970 in. (24.6 mm)	41345	3 PSF
	16 ft. (192 in.)(4.9 m)	11.21 in. (285 mm)	0.970 in. (24.6 mm)	41494	3 PSF

SMOOTH AND CEDAR TEXTURE SOFFIT

PERFECT ALTERNATIVE TO MDO AND PLYWOOD SOFFITS

- Cut-to-width eliminates time spent ripping full sheets
- 38 Series engineered for closed soffit applications
- 76 Series and 190 Series are ideal for use as the starter course for roofs with exposed eaves
- Treated engineered wood strand substrate
- Pre-primed for exceptional paint adhesion
- Comes in Cedar Texture and Smooth Finish

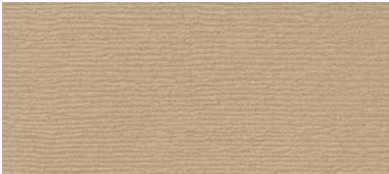


Smooth Finish




Cedar Texture


38 SERIES 4’ x 8’ CEDAR TEXTURE SOFFIT




76 SERIES 4’ x 8’ CEDAR TEXTURE SOFFIT




190 SERIES 4’ x 8’ CEDAR TEXTURE SOFFIT




38 SERIES SMOOTH FINISH SOFFIT - CUT-TO-WIDTH



38 SERIES CEDAR TEXTURE SOFFIT – CUT-TO-WIDTH



76 SERIES CEDAR TEXTURE SOFFIT – CUT-TO-WIDTH



DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
38 Series 4’ x 8’ Cedar Texture Soffit	8 ft. (96 in.)(2.4 m)	47.88 in. (1 216 mm)	0.354 in. (8.9 mm)	25813	-
38 Series 4’ x 8’ Cedar Texture Siding and Soffit Panel No Groove	8 ft. (96 in.)(2.4 m)	47.88 in. (1 216 mm)	0.354 in. (8.9 mm)	41044	1.5 PSF
76 Series 4’ x 8’ Cedar Texture Soffit	8 ft. (96 in.)(2.4 m)	47.88 in. (1 216 mm)	0.418 in. (10.6 mm)	25814	-
190 Series 4’ x 8’ Cedar Texture Soffit	8 ft. (96 in.)(2.4 m)	47.88 in. (1 216 mm)	0.578 in. (14.6 mm)	25816 *	-
38 Series Cedar Texture Soffit – Cut-to-Width	16 ft. (192 in.)(4.9 m)	11.94 in. (303 mm)	0.354 in. (8.9 mm)	25805	-
	16 ft. (192 in.)(4.9 m)	15.94 in. (405 mm)	0.354 in. (8.9 mm)	25806	-
	16 ft. (192 in.)(4.9 m)	23.94 in. (608 mm)	0.354 in. (8.9 mm)	25807	-
76 Series Cedar Texture Soffit – Cut-to-Width	16 ft. (192 in.)(4.9 m)	11.94 in. (303 mm)	0.418 in. (10.6 mm)	25808 (Discontinued)	-
38 Series Smooth Finish Soffit - Cut-to-Width	16 ft. (192 in.) (4.96 m)	15.94 in. (405 mm)	0.354 in. (8.9 mm)	42127	-

VENTED SOFFIT


MEET CODE REQUIREMENTS WHILE ADDING ARCHITECTURAL BEAUTY

- The perfect alternative to MDO, plywood or hand-installed metal vents
- Precisely cut vents offer 10 square inches of ventilation per linear foot
- Designed to minimize paint buildup and promote continuous airflow
- 1/8” vents to help keep hornets and bees out
- Eliminates time spent ripping full sheets
- Treated engineered wood strand substrate



Cedar Texture

38 SERIES VENTED CEDAR TEXTURE SOFFIT – CUT-TO-WIDTH

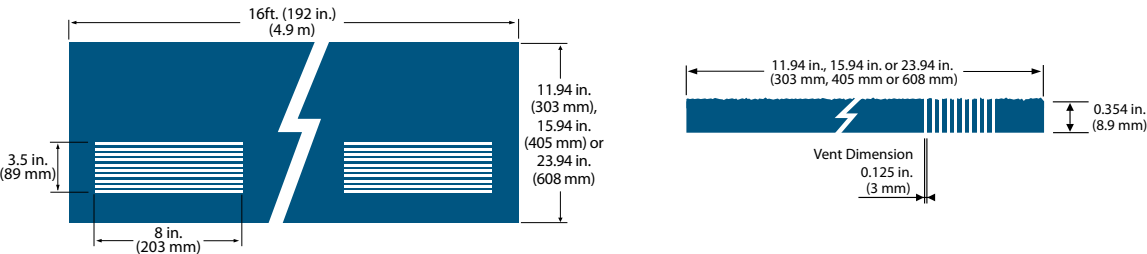

DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
38 Series Vented Cedar Texture Soffit – Cut-to-Width	16 ft. (192 in.)(4.9 m)	11.94 in. (303 mm)	0.354 in. (8.9 mm)	25822	-
	16 ft. (192 in.)(4.9 m)	15.94 in. (405 mm)	0.354 in. (8.9 mm)	25823	-
	16 ft. (192 in.)(4.9 m)	23.94 in. (608 mm)	0.354 in. (8.9 mm)	25824	-


ROOF SHEATHING

BACKED BY A 20-YEAR LIMITED MATERIALS WARRANTY

- Reduces the sun’s radiant energy through the shed roof panels
- Helps keep the shed cooler for storing items or working inside
- Highly reflective surface helps enhance lighting
- Label-free, professional-grade finish resists peeling and flaking
- Cuts with standard woodworking tools for easier installation
- Uniquely designed for use in outdoor structures



Interior
SilverTech

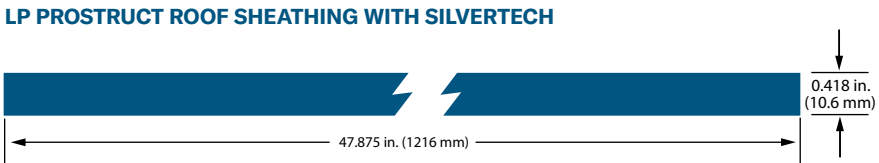

DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
Roof Sheathing with SilverTech	8ft. (95.813 in.)(2434 mm)	4ft. (47.875 in.)(1216 mm)	0.418 in. (10.6 mm)	29592	1.5 PSF





FLOORING

BACKED BY A 1/10-YEAR LIMITED MATERIALS WARRANTY

- Treated engineered wood strand technology for enhanced durability
- SmartGuard® process to resist fungal decay and termite damage
- Installs like conventional floor panels
- Excellent resistance to warping, splitting and cupping
- Free of knots, patches and face voids
- Specialized for non-residential use only



Interior
SmartFinish

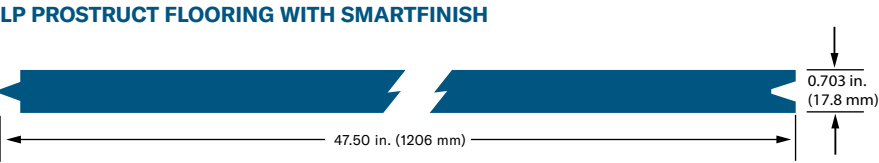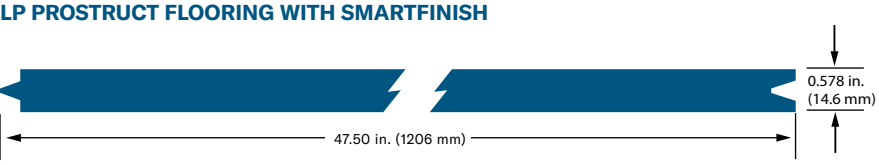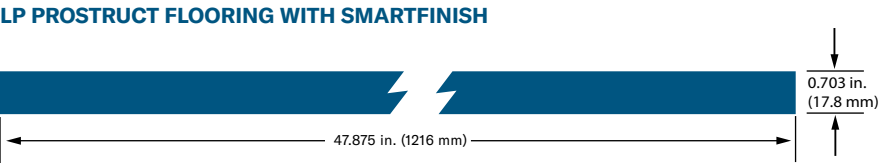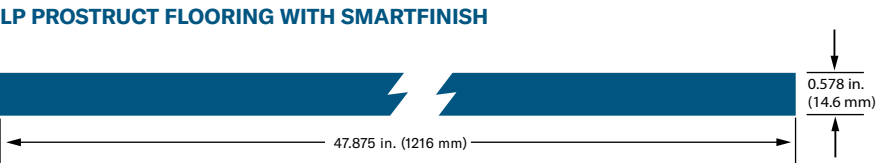

DESCRIPTION	LENGTH	ACTUAL WIDTH	THICKNESS	PID NUMBER	WEIGHT
19/32 ProStruct Flooring with SmartFinish	8ft. (95.813 in.)(2434 mm)	4ft. (47.875 in.)(1216 mm)	0.578 in. (14.6 mm)	30631	2 PSF
19/32 ProStruct Flooring with SmartFinish T&G	8ft. (95.813 in.)(2434 mm)	4ft. (47.5 in.)(1206 mm)	0.578 in. (14.6 mm)	30633	2 PSF
23/32 ProStruct Flooring with SmartFinish	8ft. (95.813 in.)(2434 mm)	4ft. (47.875 in.)(1216 mm)	0.703 in. (17.8 mm)	30632 (Discontinued)	2 PSF
23/32 ProStruct Flooring with SmartFinish T&G	8ft. (95.813 in.)(2434 mm)	4ft. (47.5 in.)(1206 mm)	0.703 in. (17.8 mm)	30628	2 PSF



PROVEN TO DEFEND YOUR BUILD™

Looking for additional options for your shed build? Try out LP® TechShield® Radiant Barrier or LP Legacy® Premium Sub-Flooring from the LP Structural Solutions product portfolio. Proven to Defend Your Build™, this collection of products is designed to work together to make any build stronger and more efficient. Visit LPCorp.com/StructuralSolutions to learn more.

Specifications: LP® TechShield® Radiant Barrier

RADIANT BARRIER

PROVEN TO BE THE #1 RADIANT BARRIER

- Blocks up to 97% of radiant heat in the panel
- Installs like conventional roof sheathing, requiring no additional labor
- Patented VaporVents™ technology with post-lamination incising allows panel to dry more quickly than other radiant barrier sheathing
- Can result in an overall lower HERS score



DESCRIPTION	LENGTH	EDGE PROFILE	ACTUAL WIDTH	THICKNESS	PID NUMBER	PIECE COUNT	WEIGHT PER UNIT (LBS.)
7/16" TechShield Sheathing	95-7/8"	Square Edge	47-7/8"	0.418 in.	39956	69	3,385

Specifications: LP Legacy® Premium Sub-Flooring

PREMIUM SUB-FLOORING

PROVEN TO BE ONE OF THE STIFFEST SUB-FLOORS ON THE PLANET

- Wood strands coated with water-resistant resins using Gorilla Glue Technology® for outstanding stiffness
- Boasts exceptional fastener holding
- Panels are packed with more strands, resins and wax to provide resistance to moisture and edge swell



DESCRIPTION	LENGTH	EDGE PROFILE	ACTUAL WIDTH	THICKNESS	PID NUMBER	PIECE COUNT	WEIGHT PER UNIT (LBS.)
23/32" Legacy Sub-flooring	95-7/8"	Tongue & Groove	47-7/16"	0.703 in.	40644	43	3,535

YOU BUILD SHEDS. WE HELP BUILD YOUR REPUTATION.

The LP® Outdoor Building Solutions® team is always looking for ways to help make building and selling sheds easier for you. With Shed Specialists across the country, we look for opportunities to provide one-on-one support that makes a meaningful difference to your business.

We're here to help you with Regional Support, Marketing Campaigns and Point-of-Sale Merchandising Material

If you have any questions, please contact an LP Outdoor Building Solutions team member by calling **844-5LP-SHED (844-557-7433)**

HELP YOUR CUSTOMERS FIND THE RIGHT SHED AT [LPCORP.COM/SHED](https://lpcorp.com/shed)

LPCorp.com/Shed offers valuable tools to help make the shed-buying process easier for your customers. Visitors to the website can determine how big a shed they need based on its intended use, customize the look of different sheds with our new Shed Visualizer, and learn how to prep their yard for a new shed.

Get inspired by visualizing different shed styles and selecting LP products



Find the right shed with a fun and interactive size selector tool

Multiple shed plans and installation instructions

Notes

[illegible]

To learn more about LP® Outdoor Building Solutions® products, view galleries and get advice, visit LPCorp.com/Shed.



ENGINEERED FOR BUILDING IT BETTER

For more than 40 years, LP has pioneered innovative building materials that look great and stand up to the elements. With a broad portfolio of products, LP is committed to delivering unparalleled quality, service and value.

LP® SMARTSIDE® TRIM & SIDING

Panel siding, lap siding, trim, soffit and more are available to elevate your shed and put your craftsmanship on display

LP® PROSTRUCT® ROOF SHEATHING WITH SILVERTECH®

A radiant barrier with a clean, bright appearance

LP® PROSTRUCT® FLOORING WITH SMARTFINISH®

Flooring developed specifically for sheds and backed by a 10-year limited warranty

For more information or to purchase LP® Outdoor Building Solutions® products, contact your local sales rep or connect with us at LPCorp.com/Shed.



Scan code for a digital version of this catalog.



For non-residential use only. The images in this catalog are for illustrative purposes only.

For more information, please visit LPCorp.com/Shed

 **WARNING:** Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to www.P65Warnings.ca.gov/wood.

©2021 Louisiana-Pacific Corporation. All rights reserved. SFI and associated logos are registered trademarks of Sustainable Forestry Initiative Inc. All other trademarks are owned by Louisiana-Pacific Corporation.

LPZB0864 7/2021