





BACKLIT PANEL


Series




PL-CK2




PL-CK

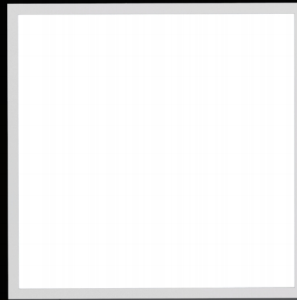


PL-CK5A

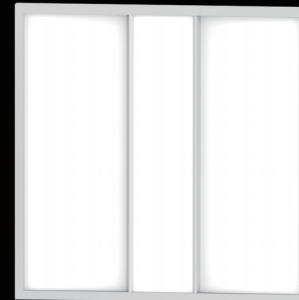

GL-AA

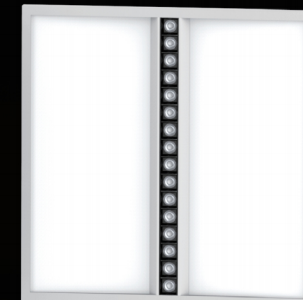

GL-AB

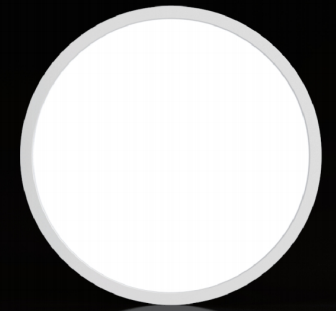

PL-DR






PL-CK Backlit Panel




Thickness

Only 32mm, saving shipping cost.



Diffuser

UGR<22 or UGR<19, No yellowing risk without LGP.



Backplane

Anti-bending, Integrated forming process Smooth corner.



Frame

21mm width 6063 Aluminum, Seamless, no light leakage.




Lens

Mitsubishi PMMA lens, no yellowing and burst.




Driver

External driver, DC connector, easy to installation and be replaced by 0-10V dimming driver, Dali dimming driver or other brand drivers



CCT changeable available



Smart control available
by Tuya, Casambi, Wiz or your smart system





PL3060-CK		120°	IP20	IP44	CRI≥80	TP(a)	TP(b)	AC 200-240V
Watt	Size(AxBxCmm)	Lumen(±5%)						
16W	595x295x32	(100LM/W UGR<19) (100LM/W)						
16W	595x295x32	(110LM/W UGR<19) (120LM/W)						

PL6060-CK		120°	IP20	IP44	CRI≥80	TP(a)	TP(b)	AC 200-240V
Watt	Size(AxBxCmm)	Lumen(±5%)						
NEW 20W	595x595x32	(160LM/W UGR<19) (180LM/W)						
30W	595x595x32	(110LM/W UGR<19) (120LM/W)						
30W	595x595x32	(130LM/W UGR<19) (140LM/W)						
36W	595x595x32	(100LM/W UGR<19) (100LM/W)						
36W	595x595x32	(110LM/W UGR<19) (120LM/W)						

PL6262-CK		120°	IP20	IP44	CRI≥80	TP(a)	TP(b)	AC 200-240V
Watt	Size(AxBxCmm)	Lumen(±5%)						
NEW 20W	620x620x32	(160LM/W UGR<19) (180LM/W)						
30W	620x620x32	(110LM/W UGR<19) (120LM/W)						
30W	620x620x32	(130LM/W UGR<19) (140LM/W)						
36W	620x620x32	(100LM/W UGR<19) (100LM/W)						
36W	620x620x32	(110LM/W UGR<19) (120LM/W)						


PL30120-CK		120°	IP20	IP44	CRI≥80	TP(a)	TP(b)	AC 200-240V
Watt	Size(AxBxCmm)	Lumen(±5%)						
NEW 20W	1195x295x32	(160LM/W UGR<19) (180LM/W)						
30W	1195x295x32	(110LM/W UGR<19) (120LM/W)						
30W	1195x295x32	(130LM/W UGR<19) (140LM/W)						
36W	1195x295x32	(100LM/W UGR<19) (100LM/W)						
36W	1195x295x32	(110LM/W UGR<19) (120LM/W)						

PL60120-CK		120°	IP20	IP44	CRI≥80	TP(a)	TP(b)	AC 200-240V
Watt	Size(AxBxCmm)	Lumen(±5%)						
NEW 40W	1195x595x32	(160LM/W UGR<19) (180LM/W)						
50W	1195x595x32	(110LM/W UGR<19) (120LM/W)						
50W	1195x595x32	(130LM/W UGR<19) (140LM/W)						
60W	1195x595x32	(100LM/W UGR<19) (100LM/W)						
60W	1195x595x32	(110LM/W UGR<19) (120LM/W)						

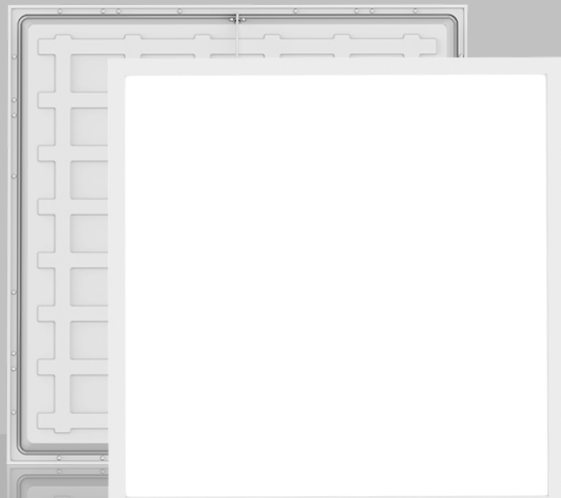


SLIM

PL-CK5A Backlit Panel

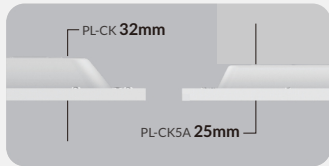

Thickness

PL-CK5A Only **25mm**. Reducing packing volume.



Diffuser

No yellowing risk without LGP.



Frame

21mm width 6063 Aluminum. Seamless, no light leakage.




Lens

Mitsubishi PMMA lens, no yellowing and burst.



Driver


External driver, DC connector, easy to installation and be replaced by 0-10V dimming driver, Dali dimming driver or other brand drivers



CCT changeable available




● **PL6060-CK5A** | 120° | IP20 | IP44 | CRI≥80 | TP(a) | TP(b) | AC 200-240V




Watt	Size(AxBxCmm)	Lumen(±5%)
36W	595x595x25 (100LM/W UGR<19)	(100LM/W)
36W	595x595x25 (110LM/W UGR<19)	(120LM/W)

● **PL6262-CK5A** | 120° | IP20 | IP44 | CRI≥80 | TP(a) | TP(b) | AC 200-240V



Watt	Size(AxBxCmm)	Lumen(±5%)
36W	620x620x25 (100LM/W UGR<19)	(100LM/W)
36W	620x620x25 (110LM/W UGR<19)	(120LM/W)

● **PL30120-CK5A** | 120° | IP20 | IP44 | CRI≥80 | TP(a) | TP(b) | AC 200-240V



Watt	Size(AxBxCmm)	Lumen(±5%)
36W	1195x295x25 (100LM/W UGR<19)	(100LM/W)
36W	1195x295x25 (110LM/W UGR<19)	(120LM/W)

Packing Measurement Comparison

Code	Carton Size(cm)	Qty/CTN	20GP (pcs)	40HQ (pcs)
PL6060-CK5A	66x21.5x69(1PCS/inner box)	5	1305	3150
	66x21.5x67.5(2PCS/inner box)	6	1638	3780
PL6060-CK	66X29X67.5(1PCS/inner box)	5	1020	2580
	66X30X67.5(2PCS/inner box)	6	1170	2682
PL6262-CK5A	68.5x21.5x71.5(1PCS/inner box)	5	1245	3105
	68.5x21.5x70(2PCS/inner box)	6	1638	3726
PL6262-CK	68.5x29x70(1PCS/inner box)	5	975	2205
	68.5x30x70(2PCS/inner box)	6	1134	2610
PL30120-CK5A	126.5x21.5x39(1PCS/inner box)	5	1175	2985
	126.5x21.5x37.5(2PCS/inner box)	6	1548	3636
PL30120-CK	126x29x37.5(1PCS/inner box)	5	930	2250
	126x30x37.5(2PCS/inner box)	6	1116	2664



PL-CK2 Backlit Panel

slim frame with frameless effect



Thickness

Only **28mm**, saving shipping cost.



Backplane

Anti-bending, Integrated forming process Smooth corner.



Frame

5mm width 6063 Aluminum, Seamless, no light leakage.




Lens

Mitsubishi PMMA lens, no yellowing and burst.




Driver


External driver, DC conneter, easy to installation and be replaced by 0-10V dimming driver, Dali dimming driver or other brand drivers



CCT changeable available

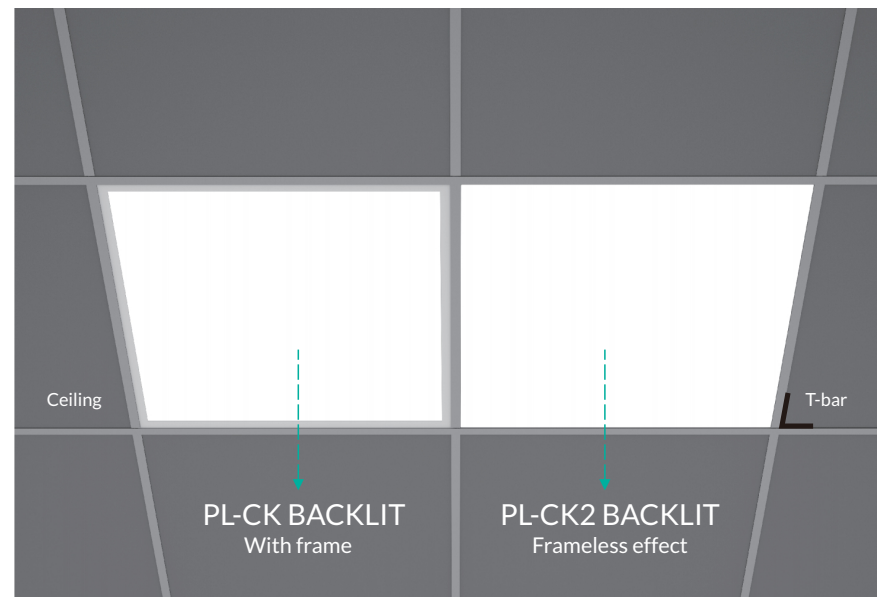


● PL6060-CK2 | 120° | IP40 | CRI≥80 | TP(a) | AC 200-240V




Watt	Size(AxBxCmm)	Lumen(±5%)
25W	595x595x28	130LM/W
30W	595x595x28	130LM/W
36W	595x595x28	120LM/W

● PL6262-CK2 | 120° | IP40 | CRI≥80 | TP(a) | AC 200-240V



Watt	Size(AxBxCmm)	Lumen(±5%)
25W	620x620x28	130LM/W
30W	620x620x28	130LM/W
36W	620x620x28	120LM/W

● PL30120-CK2 | 120° | IP40 | CRI≥80 | TP(a) | AC 200-240V



Watt	Size(AxBxCmm)	Lumen(±5%)
25W	1195x595x28	130LM/W
30W	1195x595x28	130LM/W
36W	1195x595x28	120LM/W



GL-AA Backlit Grille



Thickness

Only 49mm, saving shipping cost.



Diffuser

UGR<19, No yellowing risk without LGP.



Backplane

Anti-bending, Integrated forming process Smooth corner.



Frame

21mm width 6063 Aluminum, Seamless, no light leakage.




Lens

Mitsubishi PMMA lens, no yellowing and burst.



Driver

External driver, DC conneter, easy to installation and be replaced by 0-10V dimming driver, Dali dimming driver or other brand drivers



CCT changeable available




● **GL6060-AA** | 90° | IP20 | UGR<19 | CRI≥80 | TP(b) | AC 200-240V |




Watt	Size(AxBxCmm)	Lumen(±5%)
36W	595x595x49	100lm/w

● **GL6262-AA** | 90° | IP20 | UGR<19 | CRI≥80 | TP(b) | AC 200-240V |




Watt	Size(AxBxCmm)	Lumen(±5%)
36W	620x620x49	100lm/w

● **GL30120-AA** | 90° | IP20 | UGR<19 | CRI≥80 | TP(b) | AC 200-240V |




Watt	Size(AxBxCmm)	Lumen(±5%)
36W	1195x295x49	100lm/w

● **GL60120-AA** | 90° | IP20 | UGR<19 | CRI≥80 | TP(b) | AC 200-240V |



Watt	Size(AxBxCmm)	Lumen(±5%)
36W	1195x595x49	100lm/w

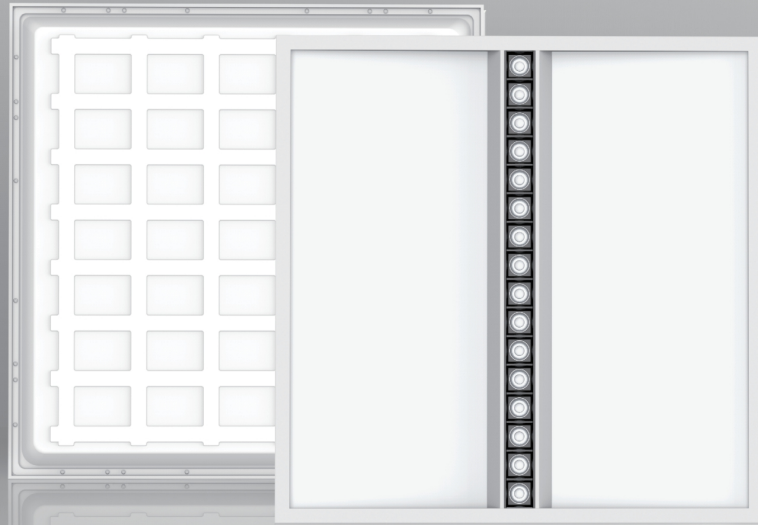

GL-AB Backlit Grille



Thickness

Only **50mm**, saving shipping cost.



Lens

Lens with secondary light distribution



Backplane

Anti-bending, Integrated forming process Smooth corner.



Frame

18mm width 6063 Aluminum, Seamless, no light leakage.



Lens

Mitsubishi PMMA lens, no yellowing and burst.




Driver

External driver, DC connector, easy to installation and be replaced by 0-10V dimming driver, Dali dimming driver or other brand drivers



Recessed



Recessed with frame



Installation for plaster ceilings



Suspended



● **GL6060-AB** | 55° | IP40 | UGR<16 | CRI≥90 | AC 200-240V



Watt	Size(AxBxCmm)	Lumen(±5%)
36W	595x595x50	100lm/w
45W	595x595x50	100lm/w




PL-DR Backlit Round Panel



Thickness

Only 30mm, saving shipping cost.



Diffuser

UGR<22 or UGR<19, No yellowing risk without LGP.



Backplane

Anti-bending, Integrated forming process Smooth corner.



Frame

24mm width 6063 Aluminum, Seamless, no light leakage.




Lens

Mitsubishi PMMA lens, no yellowing and burst.




Driver

External driver, DC connector, easy to installation and be replaced by 0-10V dimming driver, Dali dimming driver or other brand drivers



CCT changeable available

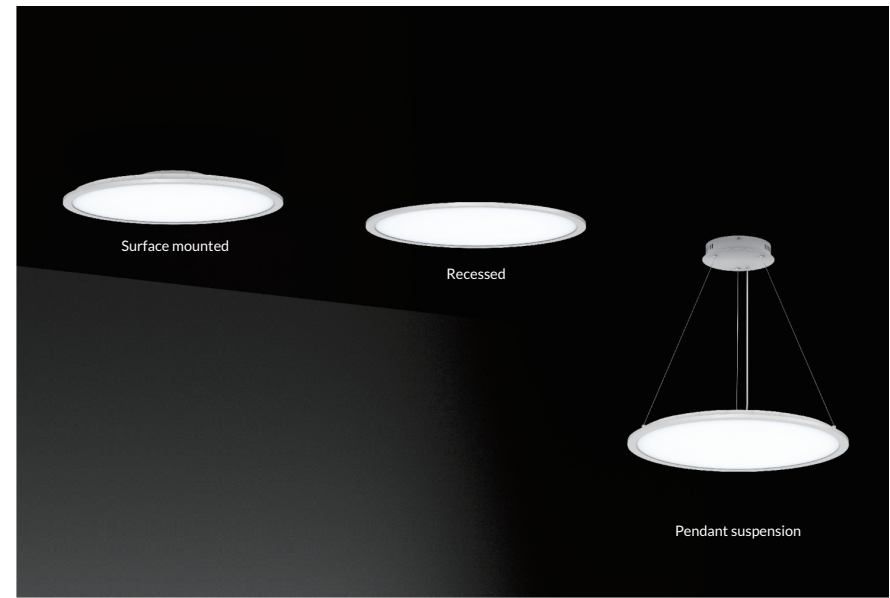

Model	Beam Angle	IP Rating	UGR	CRI	Voltage		
DR300	90°	IP20	UGR<19	CRI≥80	AC 200-240V		
					Watt	Size(AxBmm)	Lumen(±5%)
					18W	Ø300x30	100lm/w
DR400	90°	IP20	UGR<19	CRI≥80	AC 200-240V		
					Watt	Size(AxBmm)	Lumen(±5%)
					25W	Ø400x30	100lm/w
					35W	Ø400x30	100lm/w
DR500	90°	IP20	UGR<19	CRI≥80	AC 200-240V		
					Watt	Size(AxBmm)	Lumen(±5%)
					30W	Ø500x30	100lm/w
					35W	Ø500x30	100lm/w
DR600	90°	IP20	UGR<19	CRI≥80	AC 200-240V		
					Watt	Size(AxBmm)	Lumen(±5%)
					35W	Ø600x30	100lm/w
					45W	Ø600x30	100lm/w
					60W	Ø600x30	100lm/w