



LED SIGNAGE
2024 V1.0

CONTENT

LED signage letter illumination

| | |
|----------------|---|
| 2-6cm depth | RKPW30TA-A-2 ----- 01 RKPW42TA-A-2 ----- 01 RKPW60TA-A-2 ----- 02 RK0W60TA-A-2 ----- 02 RK0WC0TA-A-2 ----- 02 RKPWC0TA-A-2 ----- 02 |
| 2-4cm depth | M601TA ----- 03 M601TB ----- 03 M911TA ----- 04 M922TA ----- 04 M602TA ----- 05 M603TA ----- 05 M9A1TA ----- 06 M8R1TB ----- 07 M8R2TB ----- 07 M8R3TB ----- 07 M8R4TB ----- 07 M8C1QB ----- 08 M8C2QB ----- 08 M8C3QB ----- 08 M8C4QB ----- 08 |
| 4-8cm depth | M8B1TB ----- 09 M8B2TB ----- 09 M8B3TB ----- 09 M8B4TB ----- 09 M942TA-3 ----- 10 M943TA-3 ----- 10 ML862TA ----- 11 ML863TA ----- 12 ML863TA-1 ----- 12 ML863TA-2 ----- 12 |
| 8-12cm depth | M663TA ----- 13 M9A2TB ----- 14 M9F3TB ----- 14 M9G3TB ----- 14 M902AQ ----- 15 M903AQ ----- 15 M903AR ----- 16 |
| >12cm depth | C209TAW ----- 17 C209FAW-LT ----- 18 C112TAW-1 ----- 19 C115TAW-1 ----- 20 |
| Crystal series | |
| RGB series | |
| φ 9mm | |
| φ 12mm | |
| φ 15mm | |

LED Light Box illumination

Single side

| | |
|--------------|--|
| 3-6cm depth | M951QB ----- 21 Z6116TA-K ----- 22 |
| 6-10cm depth | M931TB-2 ----- 23 M921QB ----- 24 Z6212QA ----- 25 ZL6206TA-K ----- 26 ZL6206TC-K ----- 26 ZL6210TA-K ----- 26 ZL6210TC-K ----- 26 ZL6212TA-K ----- 26 ZL6212TC-K ----- 26 |

| | |
|--------------|--|
| 6-10cm depth | ZL7006TA-K ----- 27 ZL7006TC-K ----- 27 ZL7010TA-K ----- 27 ZL7010TC-K ----- 27 ZL7012TA-K ----- 27 ZL7012TC-K ----- 27 ZL6312TA-K ----- 28 ZL6312TC-K ----- 28 ZL6314TA-K ----- 28 ZL6314TC-K ----- 28 ZL7112TA-9A ----- 29 ZL7112TC-9A ----- 29 AC 220V ZH7106THA-K ----- 30 AC 220V ZH7112THA-K ----- 30 AC 220V ZH7406THA-K ----- 31 AC 220V ZH7409THA-K ----- 31 AC 220V ZH7412THA-K ----- 31 AC 220V ZH7414THA-K ----- 31 |
| >10cm depth | M906TD ----- 32 MA06TD ----- 33 MKA14TC ----- 34 MKA16QK ----- 34 Z7124TX ----- 35 AC 220V ZH2018THA-H ----- 36 AC 220V ZH2027THA-H ----- 36 AC 220V ZH2036THA-H ----- 36 AC 220V ZH2115THA-H ----- 37 AC 220V ZH2130THA-H ----- 37 Z1F18TA-A ----- 38 Z1F30TA-A ----- 38 Z1F36TA-A ----- 38 |


LED Light Box illumination

Double side

| | |
|--------------|---|
| 6-8cm depth | M933QB ----- 39 M901QB ----- 40 M911QB-1 ----- 41 MG903DB ----- 42 Z6110QA ----- 43 Z6120QA ----- 43 Z9110QA ----- 44 Z9120QA ----- 44 |
| 8-14cm depth | Z6203DD ----- 45 Z6205DD ----- 45 Z6207DD ----- 45 Z6209DD ----- 45 Z7003WD ----- 46 Z7005WD ----- 46 |
| >14cm depth | |

Power Supply

| | |
|------------|--|
| Waterproof | PE Series ----- 47 PA Series ----- 48 |
| Rainproof | PL Series ----- 49 PB Series ----- 50 PJ Series ----- 51 PJ Series ----- 52 |

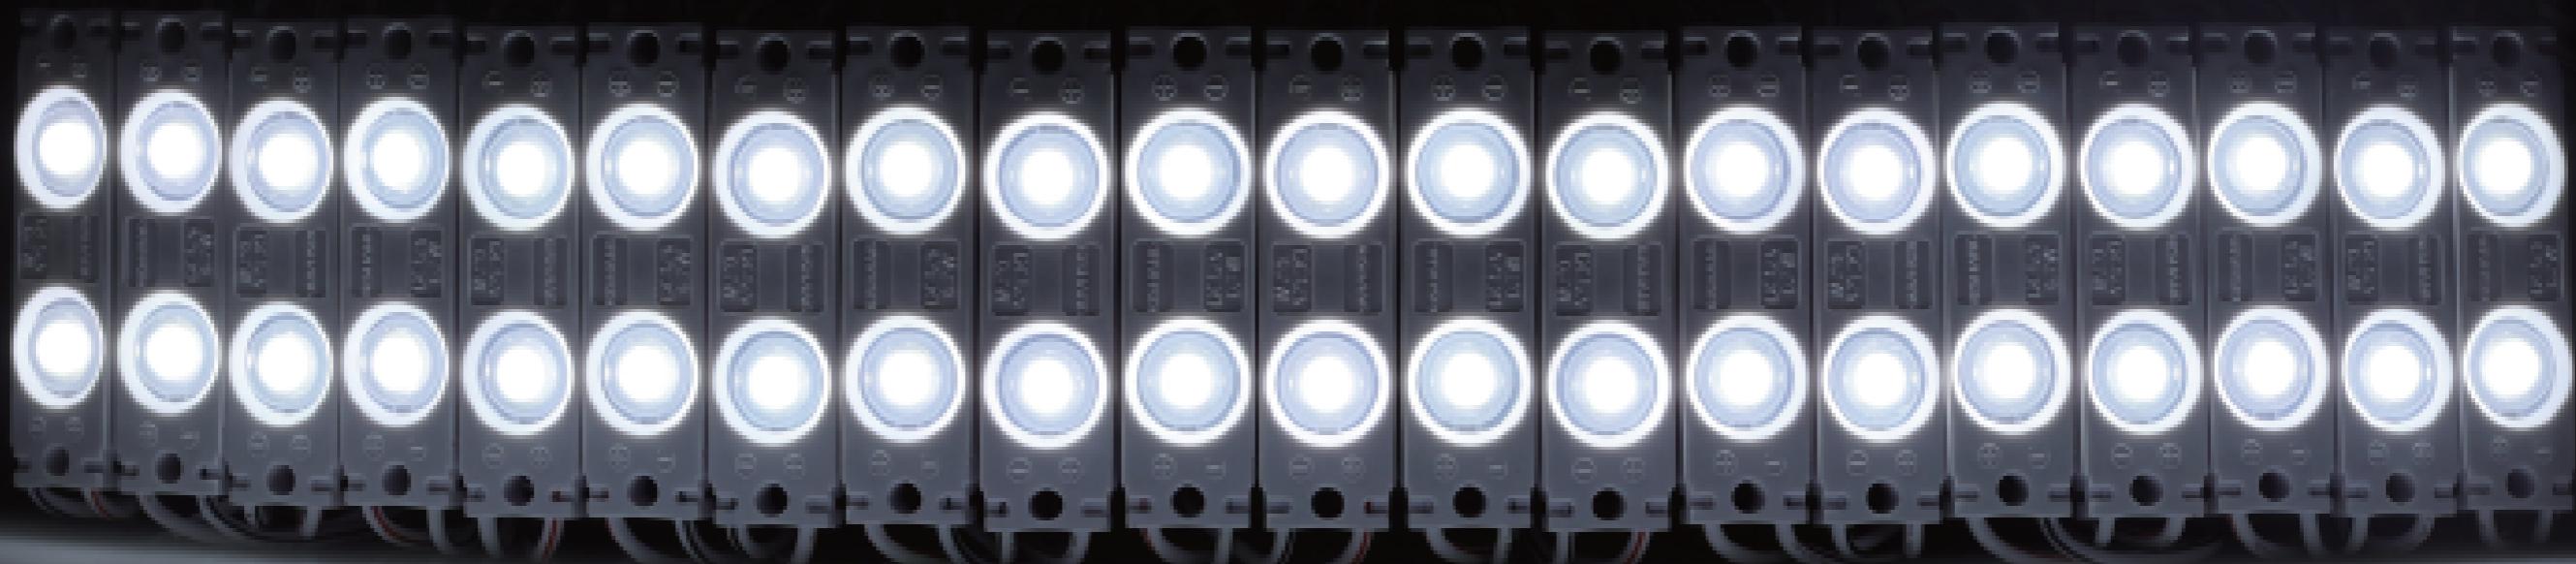


LED signage letter illumination

► LED advertising and signage modules are mainly used to display the lighting effect of the channel letters installed on the top or the wall of buildings. Rishang has various types of LED advertising modules with complete LED quantity series, with the advantages of uniform light, high brightness, long life, low energy consumption, small size, easy installation and so on. Customers can select appropriate specifications of modules according to the signage's material, depth, stroke width, application environments and other specific conditions.

Zig Zag LED Strip

RKPW30TA-A-2 / RKPW42TA-A-2

- Exclusive patented product, cool running streamline design.
- Pure copper plate, high-end quality, more excellent performance.
- Various color temperature and color matching complete.
- High adhesive thermal conductive backing, good heat dissipation, strong adhesion.

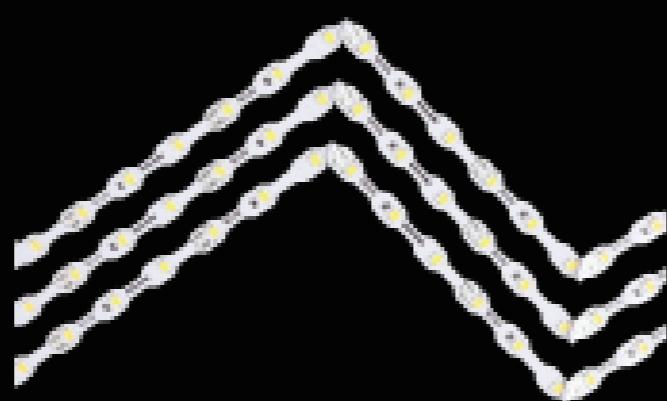


4~8cm depth

Zig Zag LED Strip

RKPW60TA-A-2 / RK0W60TA-A-2 / RK0WCOTA-A-2 / RKPWCOTA-A-2

- Exclusive patented product, cool running streamline design.
- Pure copper plate, high-end quality, more excellent performance.
- Various color temperature and color matching complete.
- High adhesive thermal conductive backing, good heat dissipation, strong adhesion.

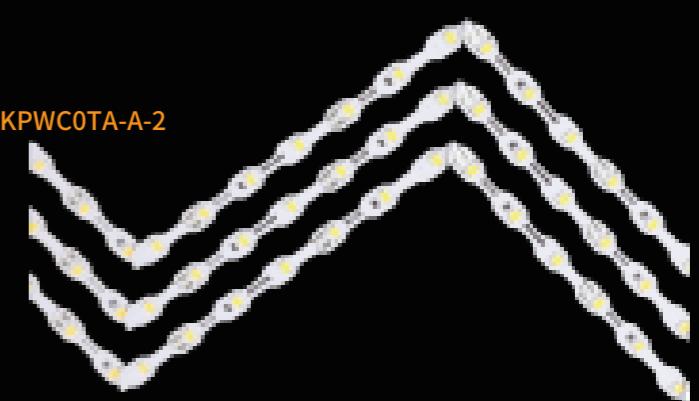

2~4cm depth


Parameters




| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------------|------|---------|---------------|---------------------|---------|------|---------|--------------|
| RKPW30TA-A-2 | 6500 | DC 12V | 630Lm/pcs | 90Lm/W | 7W/pcs | 30 | 2m | 100000*6.8mm |
| RKPW42TA-A-2 | 6500 | DC 12V | 900Lm/pcs | 90Lm/W | 10W/pcs | 42 | 2m | 100000*6.8mm |

Dimension (Unit):mm(inch)

RKPW30TA-A-2

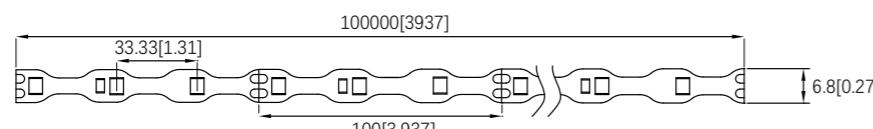

RKPW42TA-A-2

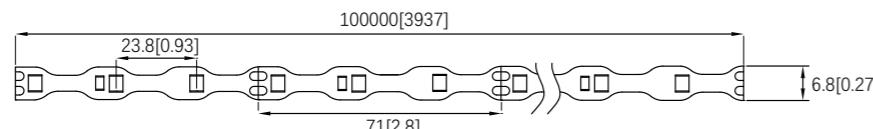


Parameters




| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------------|-------|---------|---------------|---------------------|----------|------|---------|--------------|
| RKPW60TA-A-2 | 6500K | DC 12V | 600Lm/pcs | 100Lm/W | 6W/pcs | 60 | 2m | 100000*6.8mm |
| RK0W60TA-A-2 | 6500K | DC 12V | 600Lm/pcs | 100Lm/W | 6W/pcs | 60 | 2m | 100000*6.8mm |
| RK0WCOTA-A-2 | 6500K | DC 12V | 750Lm/pcs | 104Lm/W | 7.2W/pcs | 120 | 2m | 50000*6.5mm |
| RKPWCOTA-A-2 | 6500K | DC 12V | 730Lm/pcs | 102Lm/W | 7.2W/pcs | 120 | 2m | 50000*6.5mm |

Dimension (Unit):mm(inch)


RKPW60TA-A-2

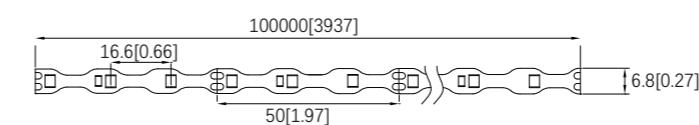


RK0W60TA-A-2

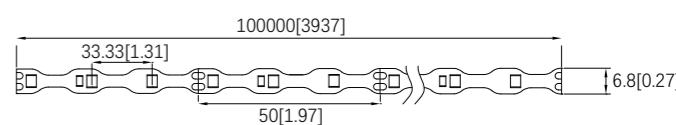

RK0WCOTA-A-2

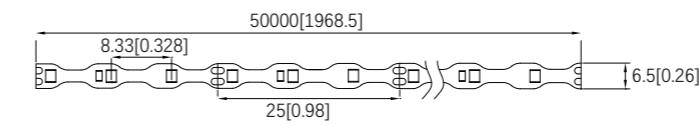

RKPWCOTA-A-2

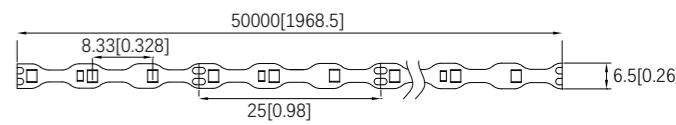

Application



Application



3~10cm depth
LED Module

M601TA / M601TB



- One-piece structure design, compact size, flexible application.
- Good protection effect, stable quality.

**Parameters**

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|----------------|
| M601TA | 6500K | DC 12V | 18Lm/pcs | 90Lm/W | 0.2W/pcs | 1 | 50 | 13.2*7.2*6.7mm |
| M601TB | 6500K | DC 12V | 22Lm/pcs | 92Lm/W | 0.24W/pcs | 1 | 50 | 13.2*7.2*6.7mm |



3~12cm depth
LED Module




M911TA / M922TA



- Using high-efficiency LED light source, higher brightness and more energy-saving.
- Double angle optical lens design, rectangular light spot.
- Super long life, five years warranty.

**Parameters**


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|--------------|
| M911TA | 6000K | DC 12V | 30Lm/pcs | 125Lm/W | 0.24W/pcs | 1 | 50 | 17*11.6*10mm |
| M922TA | 6000K | DC 12V | 60Lm/pcs | 125Lm/W | 0.48W/pcs | 2 | 30 | 31*11.8*10mm |

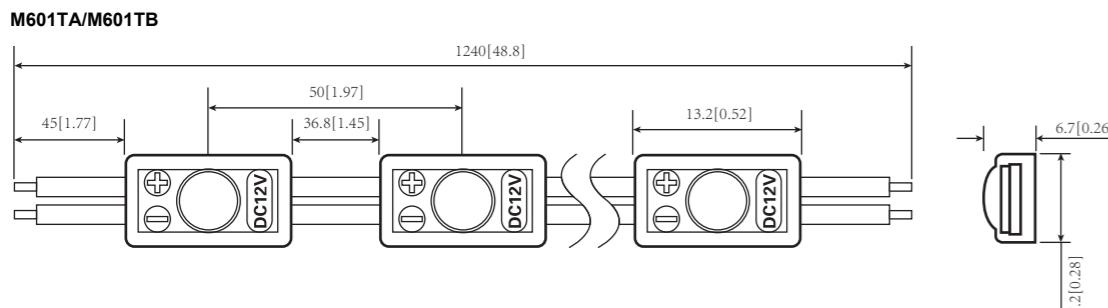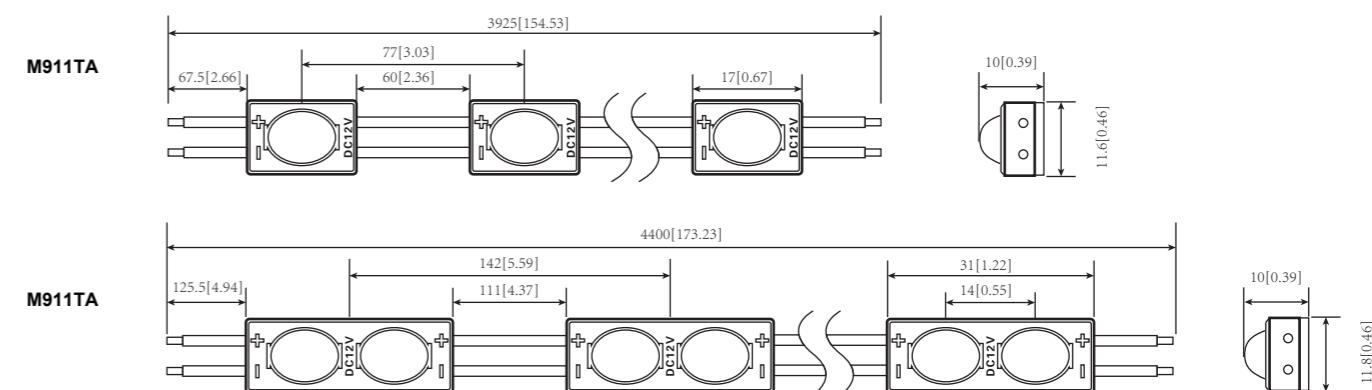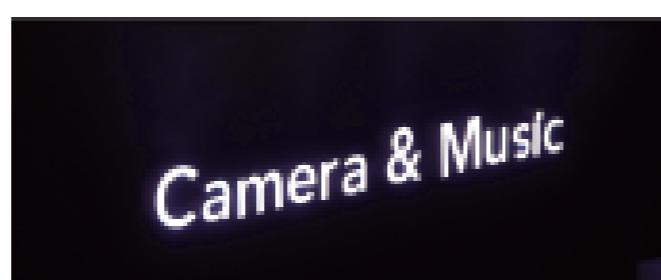Dimension (Unit):mm(inch)**Dimension (Unit):mm(inch)****Application****Application**

LED Module

M602TA / M603TA

3~12cm depth

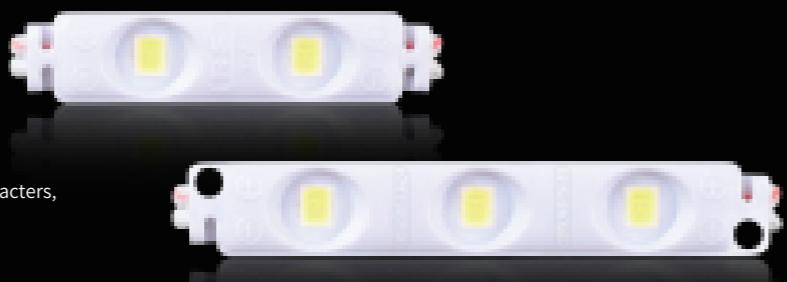

- Extreme size, only 7mm wide.
- Supporting three-lamp products, compatible with large characters, more flexible.




Parameters




| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|---------------|
| M602TA | 6000K | DC 12V | 20Lm/pcs | 61Lm/W | 0.33W/pcs | 2 | 50 | 30*7*5.66mm |
| M603TA | 6000K | DC 12V | 30Lm/pcs | 91Lm/W | 0.33W/pcs | 3 | 50 | 48*12.4*5.5mm |

Dimension (Unit):mm(inch)

M602TA

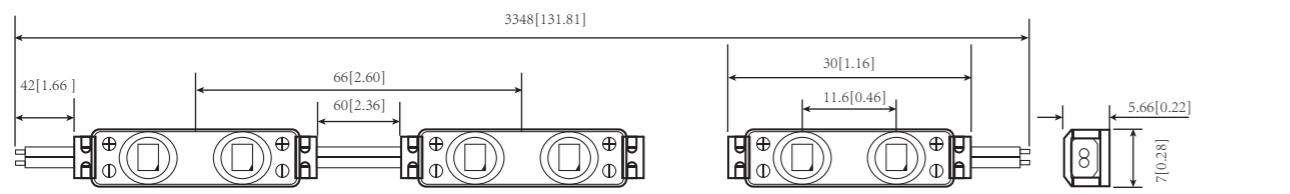

M603TA

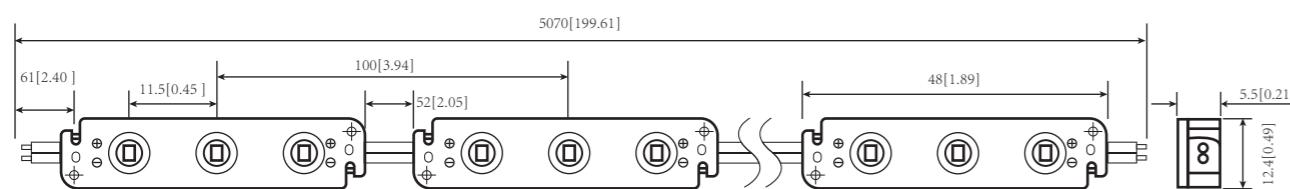


Application



LED Module

M9A1TA

3~8cm depth

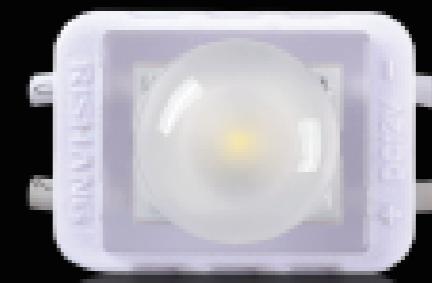

- Standard cascading qty up to 60pcs.
- Beam angle: 160°.
- Can be cut between every unit.




Parameters



| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|
| M9A1TA | 7000K | DC 12V | 44.8Lm/pcs | 160Lm/W | 0.28W/pcs | 1 | 60 | 16*12*8.8mm |

Dimension (Unit):mm(inch)

M9A1TA

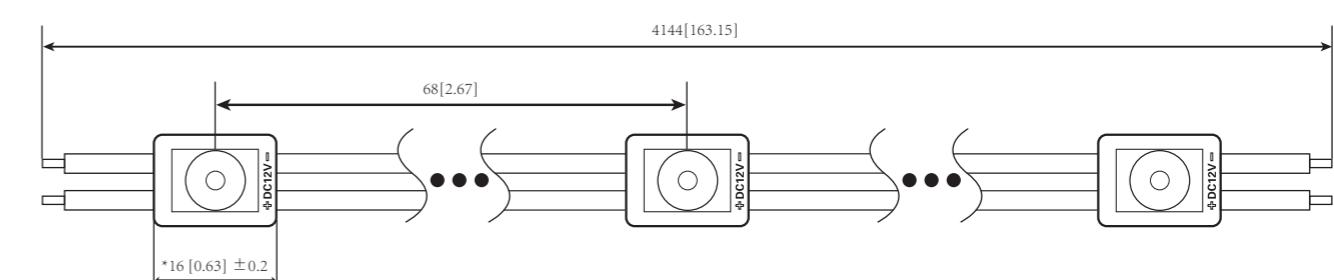

Application




4~12cm depth
LED Module

M8R1TB / M8R2TB / M8R3TB / M8R4TB

- Secondary optical large bat wing design, higher uniformity.
- High luminous efficacy, up to 160lm/W.
- With constant current technology, the performance is more stable.

**Parameters**


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|
| M8R1TB | 6000K | DC 12V | 58Lm/pcs | 160Lm/W | 0.36W/pcs | 1 | 40 | 42*16*7.5mm |
| M8R2TB | 6000K | DC 12V | 96Lm/pcs | 160Lm/W | 0.6W/pcs | 2 | 35 | 57*16*7.5mm |
| M8R3TB | 6000K | DC 12V | 160Lm/pcs | 160Lm/W | 1W/pcs | 3 | 25 | 79*16*7.5mm |
| M8R4TB | 6000K | DC 12V | 230Lm/pcs | 160Lm/W | 1.44W/pcs | 4 | 20 | 49*39*7.5mm |

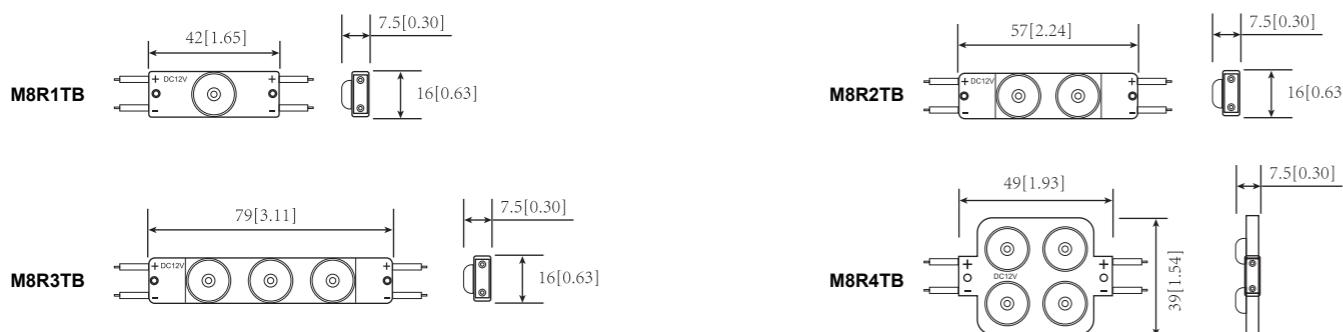Dimension (Unit):mm(inch)**Application**


4~12cm depth
LED Module

M8C1QB / M8C3QB / M8C2QB / M8C4QB

- 20% more energy efficient than conventional energy-saving modules.
- Good spacing, spacing to depth is 3.5 to 1.
- Constant current driving, continuous brightness output.

**Parameters**


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|---------|
| M8C1QB | 7000K | DC 12V | 65Lm/pcs | 180Lm/W | 0.36W/pcs | 1 | 55 | 38*20mm |
| M8C2QB | 7000K | DC 12V | 130Lm/pcs | 180Lm/W | 0.72W/pcs | 2 | 35 | 55*20mm |
| M8C3QB | 7000K | DC 12V | 180Lm/pcs | 180Lm/W | 1W/pcs | 3 | 25 | 82*20mm |
| M8C4QB | 7000K | DC 12V | 259Lm/pcs | 180Lm/W | 1.11W/pcs | 4 | 25 | 55*55mm |

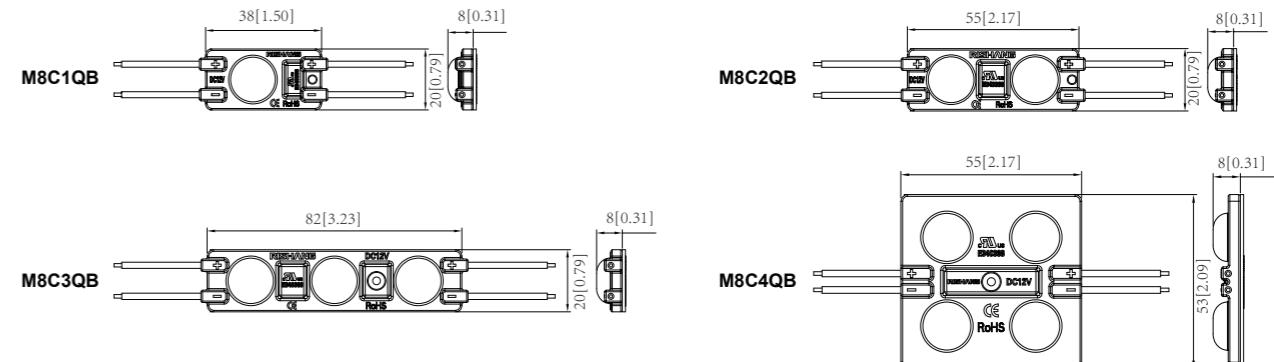Dimension (Unit):mm(inch)**Application**

LED Module

M8B1TB / M8B2TB / M8B3TB / M8B4TB





- Patented design of tough blade appearance.
- High-end atmosphere 5 years Warranty.
- Constant current technology.

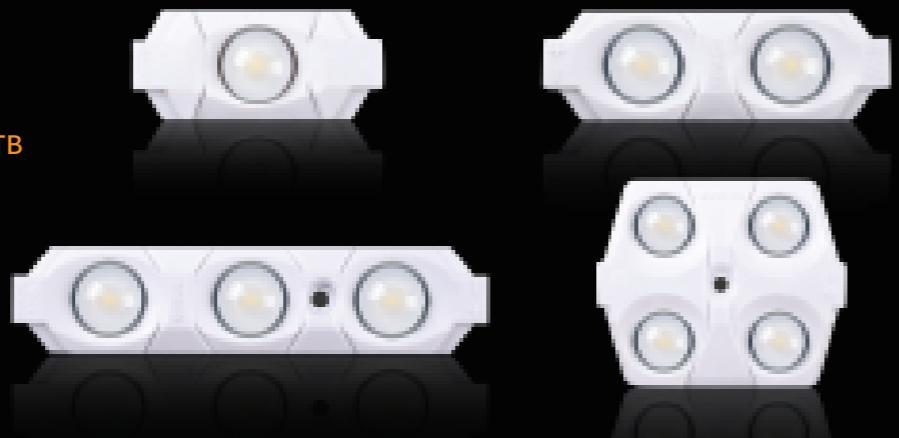


Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|
| M8B1TB | 6000K | DC 12V | 42Lm/pcs | 117Lm/W | 0.36W/pcs | 1 | 50 | 35*16*7.8mm |
| M8B2TB | 6000K | DC 12V | 93Lm/pcs | 129Lm/W | 0.72W/pcs | 2 | 50 | 49*16*7.8mm |
| M8B3TB | 6000K | DC 12V | 128Lm/pcs | 128Lm/W | 1W/pcs | 3 | 50 | 70*16*7.8mm |
| M8B4TB | 6000K | DC 12V | 172Lm/pcs | 119Lm/W | 1.44W/pcs | 4 | 25 | 45*38*7.8mm |

Dimension (Unit):mm(inch)

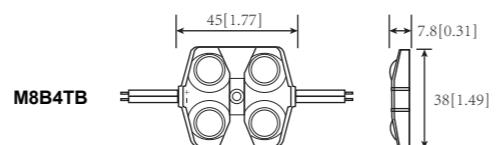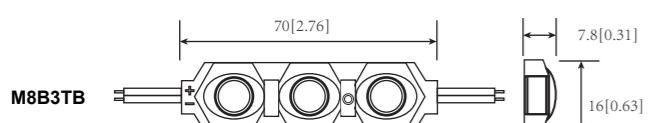



Application

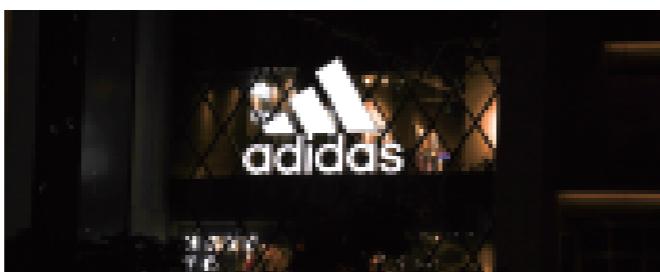

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|----------|-------|---------|---------------|---------------------|----------|------|---------|-------------|
| M942TA-3 | 6000K | DC 12V | 56Lm/pcs | 80Lm/W | 0.7W/pcs | 2 | 20 | 48*13*6.5mm |
| M943TA-3 | 6000K | DC 12V | 90Lm/pcs | 112Lm/W | 0.8W/pcs | 3 | 20 | 68*13*6.5mm |

Dimension (Unit):mm(inch)

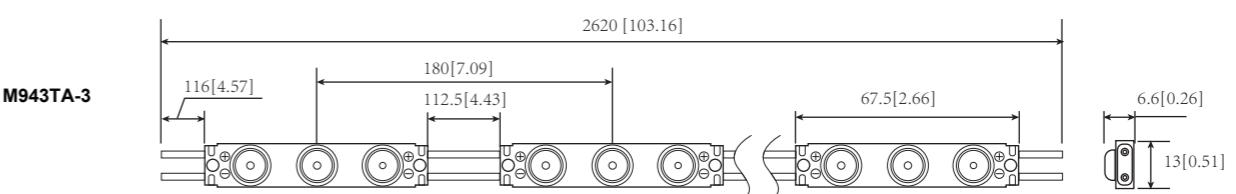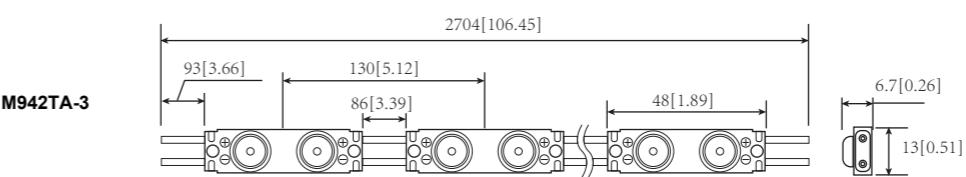

Application



8~12cm depth
LED Module

ML862TA

- By the second optical light distribution, more uniform light-emitting.
- The most cost-effective light-emitting character module light source.



SMD **IP65** **(3)** **150°** **3000K-14000K** **W**

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|
| ML862TA | 7500K | DC 12V | 37Lm/pcs | 77Lm/W | 0.48W/pcs | 2 | 20 | 45*12.6*4mm |

RoHS **CE** **UL**

8~12cm depth
LED Module

ML863TA / ML863TA-1 / ML863TA-2

- By the second optical light distribution, more uniform light-emitting.
- The most cost-effective light-emitting character module light source.





SMD **IP65** **(3)** **150°** **3000K-14000K** **W**

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-----------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|
| ML863TA | 7500K | DC 12V | 80Lm/pcs | 111Lm/W | 0.72W/pcs | 3 | 20 | 63*12.6*4mm |
| ML863TA-1 | 7500K | DC 12V | 80Lm/pcs | 110Lm/W | 0.72W/pcs | 3 | 20 | 63*12.6*4mm |
| ML863TA-2 | 7500K | DC 12V | 111Lm/pcs | 111Lm/W | 1W/pcs | 3 | 20 | 63*12.6*4mm |

RoHS **CE** **UL**

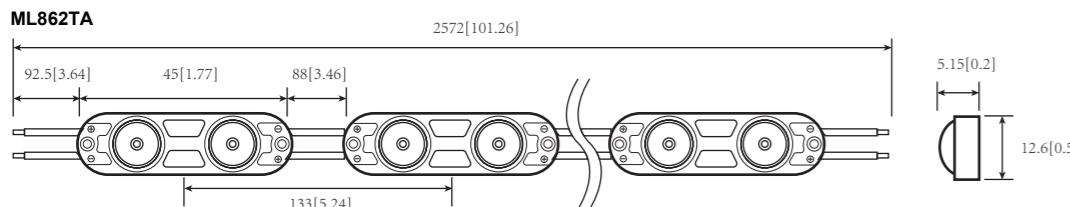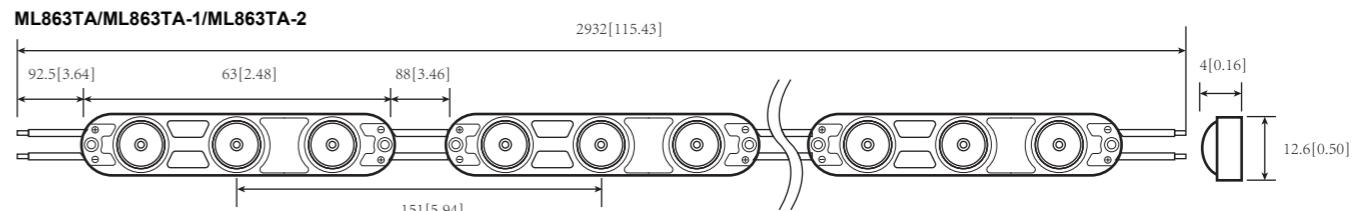Dimension (Unit):mm(inch)**Dimension (Unit):mm(inch)****Application****Application**


10~20cm depth
LED Module

M663TA

- High-power, direct-emitting, high-brightness products.
- Suitable for luminous channel letter on the roof, color luminous characters.

**Parameters**


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|--------|------|---------|-------------|
| M663TA | 6000K | DC 12V | 100Lm/pcs | 100Lm/W | 1W/pcs | 3 | 20 | 68*12*4.5mm |

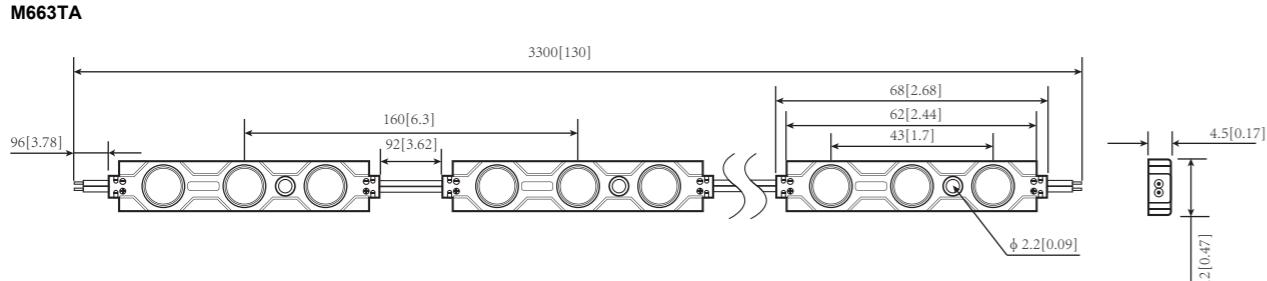Dimension (Unit):mm(inch)**Application**


6~20cm depth
LED Module

Crystal Series**M9A2TB / M9F3TB / M9G3TB**

- Great appearance.
- All-in-one optical design.
- High luminous efficacy and uniform brightness.

**Parameters**

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|
| M9A2TB | 6000K | DC 12V | 39Lm/pcs | 114Lm/W | 0.34W/pcs | 2 | 50 | 33*11*10mm |
| M9F3TB | 6000K | DC 12V | 53Lm/pcs | 110Lm/W | 0.48W/pcs | 3 | 50 | 45*11*9.6mm |
| M9G3TB | 6000K | DC 12V | 80Lm/pcs | 111Lm/W | 0.72W/pcs | 3 | 50 | 40*11*9.6mm |

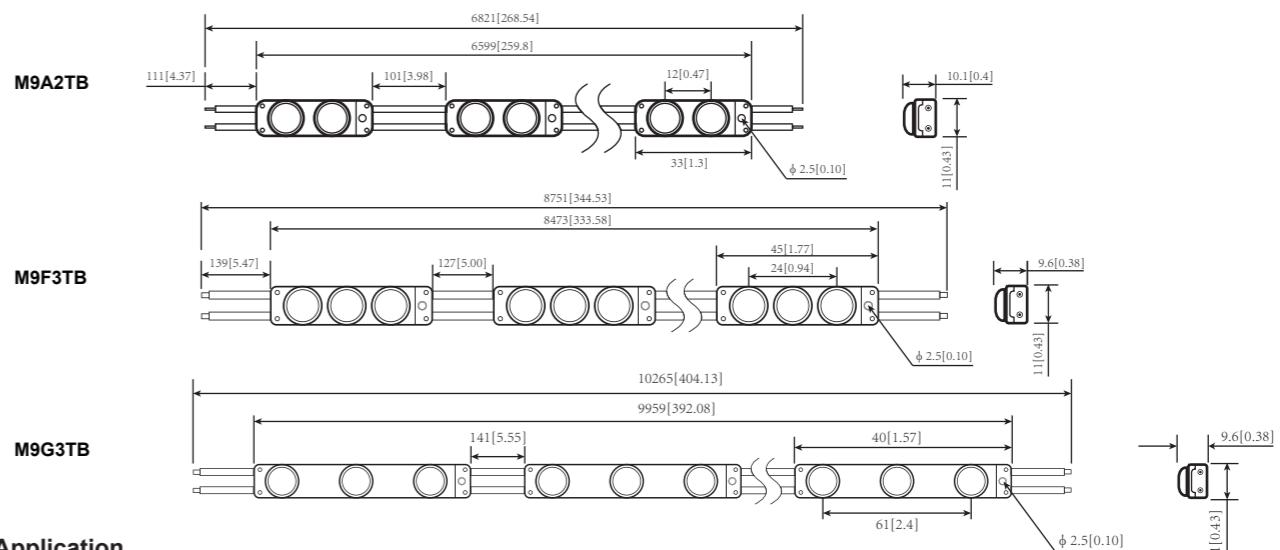Dimension (Unit):mm(inch)**Application**

8~20cm depth

LED Module


RGB Series

M902AQ / M903AQ

- Colorful module.
- Adopt one-piece lens, high-end appearance.
- The external controller can realize colorful effects and rich colors.
- Can be cut between every single light.

**Parameters**

| P/N | Wave Length | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size | | |
|---------|----------------|----------------|----------------|---------------------|----------|----------|-----------|------|----|----------------|
| M902AQ | 620-625nm R | 525-530nm G | 465-470nm B | DC 12V | 14Lm/pcs | 19.4Lm/W | 0.72W/pcs | 2 | 25 | 49*18.6*10.4mm |
| M9023AQ | 620-625nm R | 525-530nm G | 465-470nm B | DC 12V | 21Lm/pcs | 29Lm/W | 0.72W/pcs | 3 | 25 | 70*16*11.2mm |

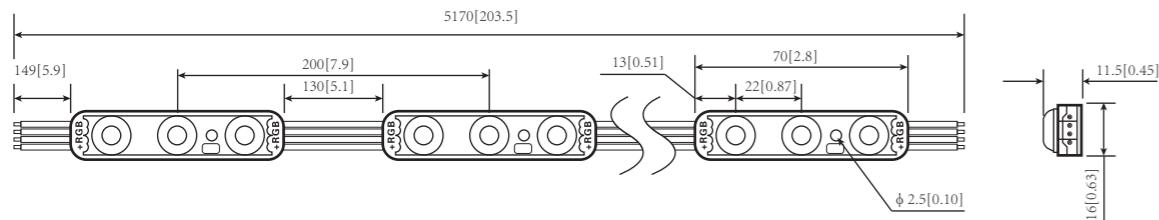Dimension (Unit):mm(inch)**M902AQ/M903AQ**

8~20cm depth

LED Module


RGB Series

M903AR

- Full color module.
- RGB colorful single-point control to achieve rich color changing effects.
- Can be cut between every single light, support breakpoint resume.

**Parameters**

| P/N | Wave Length | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size | | |
|--------|----------------|----------------|----------------|---------------------|---------------------|---------------------|-----------|------|----|--------------|
| M903AR | 620-625nm R | 525-530nm G | 465-470nm B | DC 12V | R8 / G16 / B4Lm/pcs | R33 / G66 / B16Lm/W | 0.24W/pcs | 3 | 20 | 78*18*10.7mm |

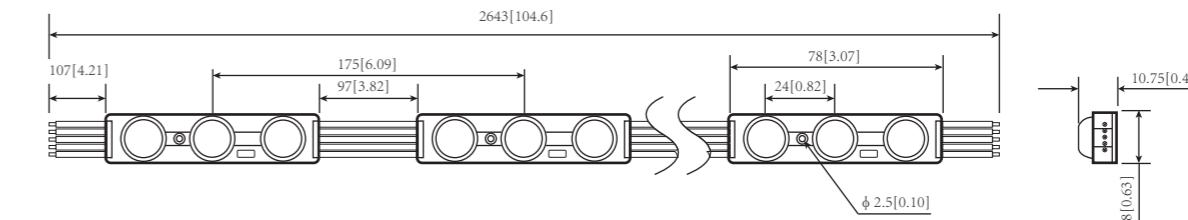
Dimension (Unit):mm(inch)**M903AR****Application****Application**

Dot LED φ 9mm**C209TAW**

- Special technology structure design, uniform and soft lighting.
- No yellowing after long time use.
- The lugs are automatically locked by rebound after getting through the hole.


SMD
IP66
(3)
143°
Dot LED φ 9mm**C209FAW-LT**


- Standard cascade quantity up to 50pcs.
- SMD process, uniform light.
- Waterproof, dustproof, anti-UV.

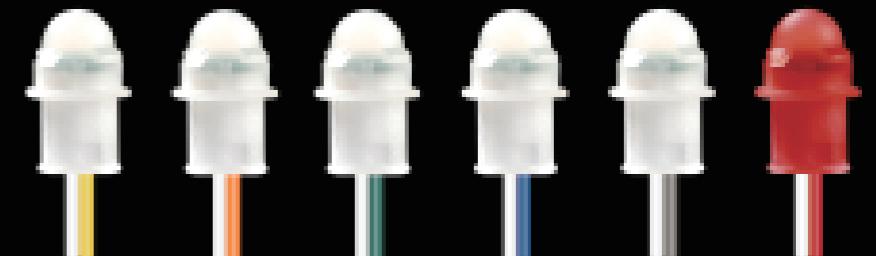
SMD
IP67
(3)
170°
10000K-12000K
W
Parameters

| P/N | CCT/Wave Length | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-----------------|---------|---------------|---------------------|-----------|------|---------|--------|
| C209TAW | 7000K | DC 12V | 16.7Lm/pcs | 93Lm/W | 0.18W/pcs | 1 | 50 | 20*9mm |
| C209TAW | R 620-625nm | DC 12V | 1.7Lm/pcs | 9.5Lm/W | 0.18W/pcs | 1 | 50 | 20*9mm |
| C209TAW | G 522-527nm | DC 12V | 15.7Lm/pcs | 87Lm/W | 0.18W/pcs | 1 | 50 | 20*9mm |
| C209TAW | B 455-460nm | DC 12V | 2.9Lm/pcs | 16Lm/W | 0.18W/pcs | 1 | 50 | 20*9mm |
| C209TAW | Y 1800-2200nm | DC 12V | 16.2Lm/pcs | 90Lm/W | 0.18W/pcs | 1 | 50 | 20*9mm |

Dimension (Unit):mm(inch)



C209TAW

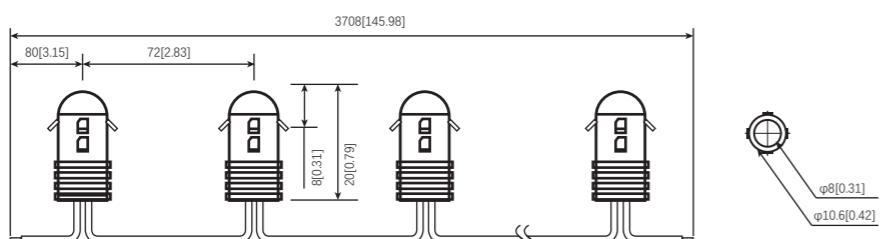**Application****Parameters**

| P/N | CCT/Wave Length | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|------------|-----------------|---------|---------------|---------------------|-----------|------|---------|--------|
| C209FAW-LT | 10000K | DC 12V | 14Lm/pcs | 77Lm/W | 0.16W/pcs | 1 | 50 | 17*9mm |
| C209FAW-LT | R 620-625nm | DC 12V | 3Lm/pcs | 16Lm/W | 0.16W/pcs | 1 | 50 | 17*9mm |
| C209FAW-LT | G 530-535nm | DC 12V | 19Lm/pcs | 109Lm/W | 0.16W/pcs | 1 | 50 | 17*9mm |
| C209FAW-LT | Y 585-590nm | DC 12V | 12.8Lm/pcs | 67Lm/W | 0.16W/pcs | 1 | 50 | 17*9mm |
| C209FAW-LT | B 460-465nm | DC 12V | 2.6Lm/pcs | 14Lm/W | 0.16W/pcs | 1 | 50 | 17*9mm |
| C209FAW-LT | O 605-610nm | DC 12V | 6.3Lm/pcs | 34Lm/W | 0.16W/pcs | 1 | 50 | 17*9mm |

Dimension (Unit):mm(inch)


C209FAW-LT

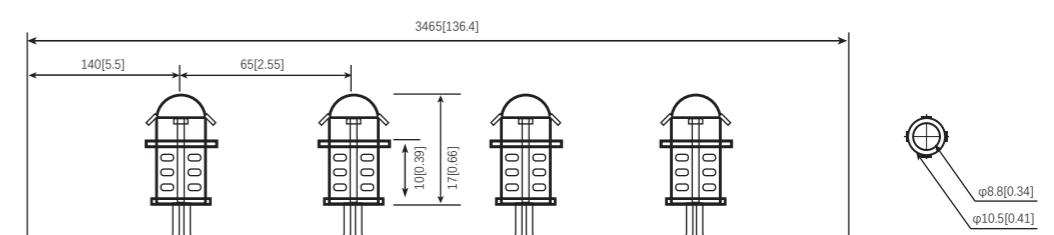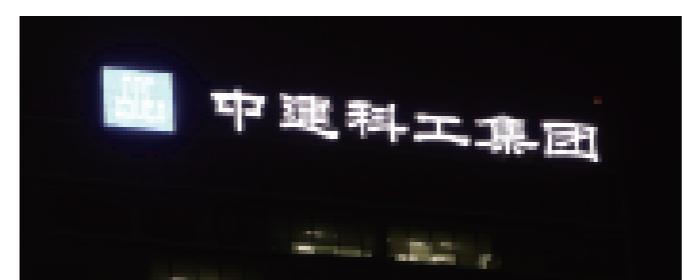**Application**

Dot LED Φ 12mm

C112TAW-1


- Patent product, SMD process.
- Stable and reliable, 5 years warranty.
- The first choice for bright channel letter on the outdoor roof.

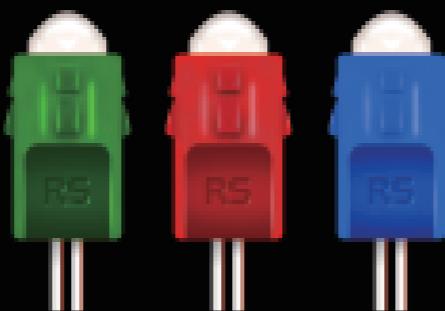

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-----------|-------|---------|---------------|---------------------|-----------|------|---------|---------|
| C112TAW-1 | 9000K | DC 12V | 10Lm/pcs | 62.5Lm/W | 0.16W/pcs | 1 | 50 | 25*12mm |

Dimension (Unit:mm/inch)

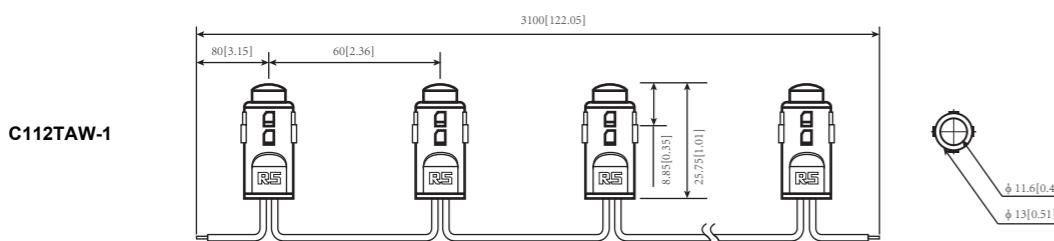


Application



Dot LED Φ 15mm

C115AAW-1


- Patent product, SMD process.
- Stable and reliable, 5 years warranty.
- The first choice for bright channel letter on the outdoor roof.

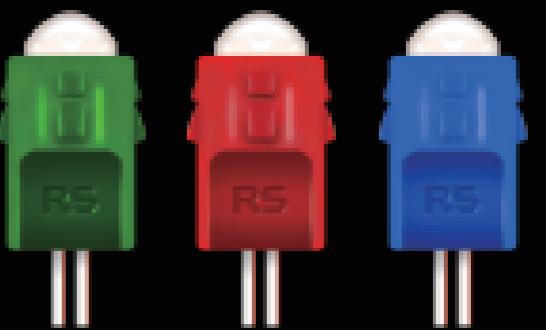


Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-----------|-------------|---------|---------------|---------------------|-----------|------|---------|---------|
| C115AAW-1 | 9000K | DC 12V | 20Lm/pcs | 83.3Lm/W | 0.24W/pcs | 1 | 50 | 26*15mm |
| C115AAW-1 | R 620-625nm | DC 12V | 6.1Lm/pcs | 25.4Lm/W | 0.24W/pcs | 1 | 50 | 26*15mm |
| C115AAW-1 | Y 585-590nm | DC 12V | 5.5Lm/pcs | 23Lm/W | 0.24W/pcs | 1 | 50 | 26*15mm |
| C115AAW-1 | G 525-530nm | DC 12V | 10.6Lm/pcs | 44.2Lm/W | 0.24W/pcs | 1 | 50 | 26*15mm |
| C115AAW-1 | B 465-470nm | DC 12V | 20Lm/pcs | 2.5Lm/W | 0.24W/pcs | 1 | 50 | 26*15mm |

Dimension (Unit:mm/inch)

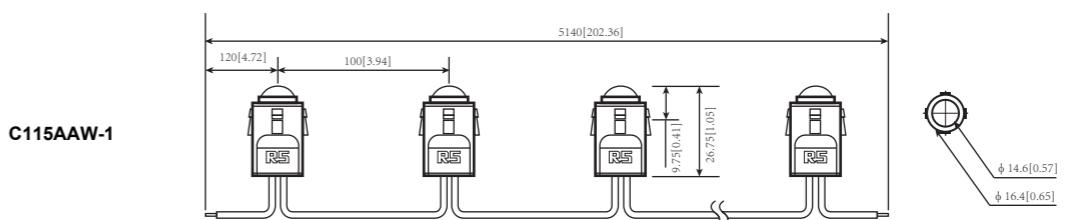

Application

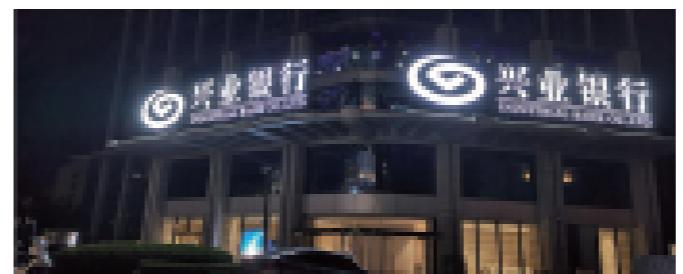



LED Light Box illumination

Single side

► Rishang's light source products for single-sided light boxes are divided into two categories, low voltage and high voltage, including LED light bars and modules, which are widely used in back-lit light boxes with different depths. The products usually adopt straight structure, wide angle optical design and high thermal conductive aviation aluminum substrate. The products have the advantages of high brightness, uniform light, low energy consumption, easy installation, making the pictures of advertising light boxes look bright, uniform, clear and natural.

3~10cm depth

LED Module

M951QB

- Single-LED large-angle optical design.
- 60 pieces of ultra-long cascade.
- Flexible and easy installation.


SMD IP65 5 160°


Parameters



| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|---------------|
| M951QB | 6500K | DC 12V | 80Lm/pcs | 110Lm/W | 0.72W/pcs | 1 | 60 | 42.8*24*8.8mm |

Dimension (Unit):mm(inch)

M951QB

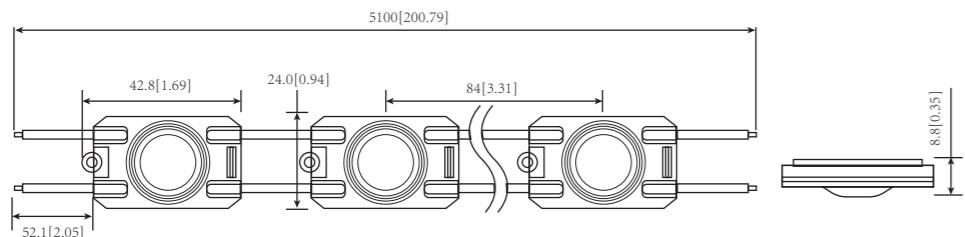

Application



2.5~8cm depth

LED Rigid Bar

Z6116TA-K

- Large beam angle optical design.
- Uniform luminous effect.


SMD IP20 3 160°


Parameters




| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-----------|-------|---------|---------------|---------------------|-----------|------|---------|----------|
| Z6116TA-K | 6000K | DC 12V | 1400Lm/pcs | 110Lm/W | 12.8W/pcs | 16 | 1 | 990*19mm |

Dimension (Unit):mm(inch)

Z6116TA-K

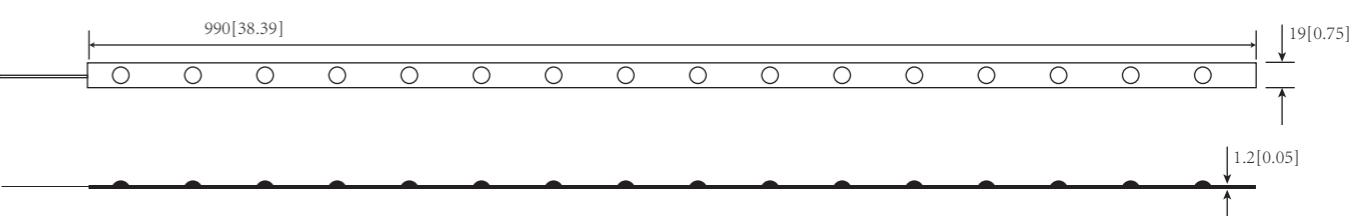

Application

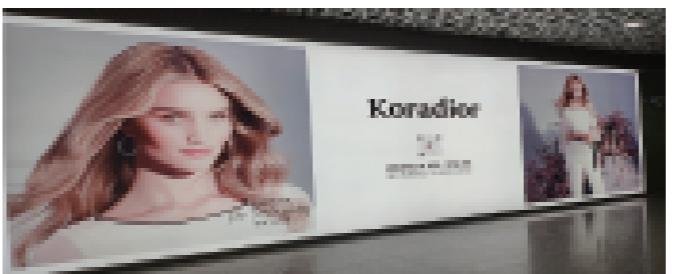

4~10cm depth

LED Module

M931TB-2

- Large optical lens, better lighting effect.
- Small size structure design, flexible lighting layout.
- Suitable for all kinds of small special-shaped light boxes.

**Parameters**

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|----------|-------|---------|---------------|---------------------|----------|------|---------|-------------|
| M931TB-2 | 6000K | DC 12V | 96Lm/pcs | 96Lm/W | 1.0W/pcs | 1 | 25 | 44*23*6.9mm |



6~12cm depth

LED Module

M921QB


- Using 3030 high-power LED, long life.
- Constant current technical solution products, more stable.
- IP65 protection perfect for indoor and outdoor light box lighting.

**Parameters**



| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|----------|------|---------|-------------|
| M921QB | 6000K | DC 12V | 215Lm/pcs | 90Lm/W | 2.4W/pcs | 1 | 25 | 50*30*7.7mm |

**Dimension (Unit:mm/inch)**

M931TB-2

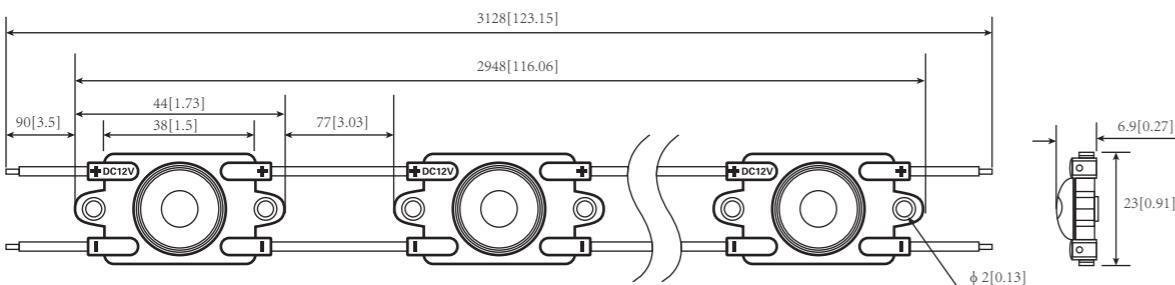**Dimension (Unit:mm/inch)**

M921QB

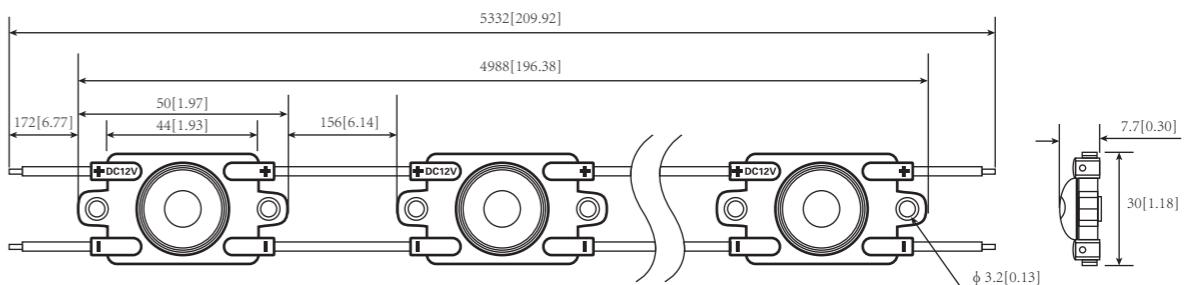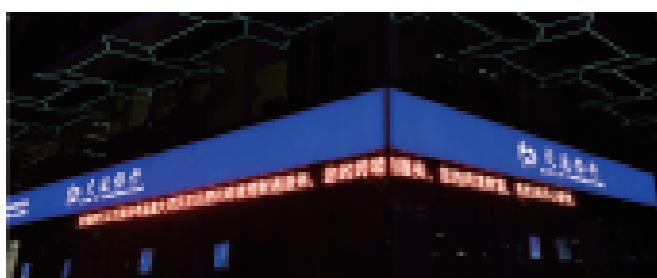**Application****Application**

6~10cm depth

LED Rigid Bar

Z6212QA

- Simple design, stable performance.
- Simple roller shutter structure design, easy to use.
- Large beam angle 160°, good uniformity.



6~20cm depth

LED Rigid Bar

ZL6206 / 10 / 12 TA-K ZL6206 / 10 / 12 TC-K


- Single LED uses three big chips, high brightness.
- Large angle lens, uniform light.
- Various colors are available.
- The most cost-effective light source for indoor light box.



Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|---------|------|---------|----------|
| Z6212QA | 7500K | DC 12V | 1150Lm/pcs | 95Lm/W | 12W/pcs | 12 | 10 | 960*17mm |

Dimension (Unit):mm(inch)

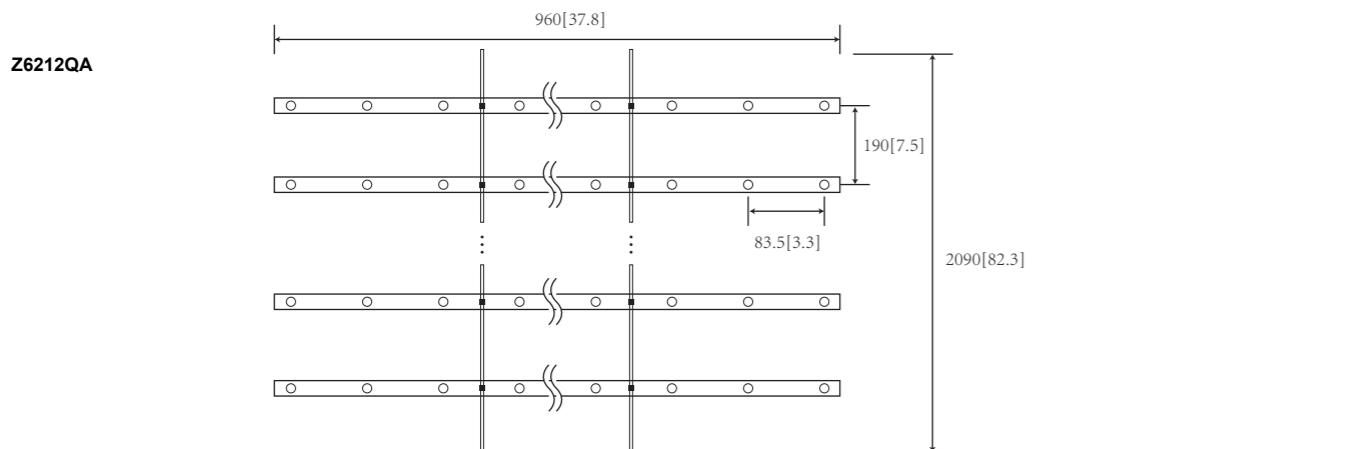


Application



Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|------------------|-------|---------|---------------------|---------------------|--------------|---------|---------|-------------------|
| ZL6206/10/12TA-K | 7000K | DC 12V | 600/1000/1200Lm/pcs | 100Lm/W | 6/10/12W/pcs | 6/10/12 | 10 | 530/930/1130*15mm |
| ZL6206/10/12TC-K | 7000K | DC 24V | 600/1000/1200Lm/pcs | 100Lm/W | 6/10/12W/pcs | 6/10/12 | 10 | 530/930/1130*15mm |

Dimension (Unit):mm(inch)

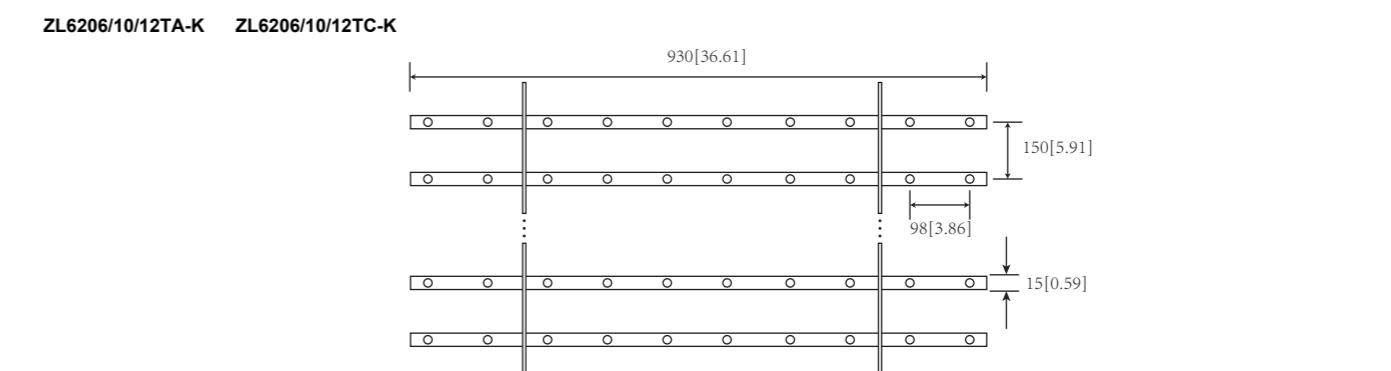

Application



6~10cm depth

LED Rigid Bar

ZL7006 / 10 / 12 TA-K ZL7006 / 10 / 12 TC-K

- Cost-effective large angle LED light bar.
- High brightness, light efficacy up to 100lm/W.
- IP65 high protection.




Parameters


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|------------------|-------|---------|--------------------|---------------------|--------------|------|---------|-------------------|
| ZL7006/10/12TA-K | 7000K | DC 12V | 570/950/1140Lm/pcs | 95Lm/W | 6/10/12W/pcs | 10 | 6/10/12 | 538/930/1126*17mm |
| ZL7006/10/12TC-K | 7000K | DC 24V | 570/950/1140Lm/pcs | 95Lm/W | 6/10/12W/pcs | 10 | 6/10/12 | 538/930/1126*17mm |

Dimension (Unit:mm/inch)

ZL7006/10/12TA-K ZL7006/10/12TC-K

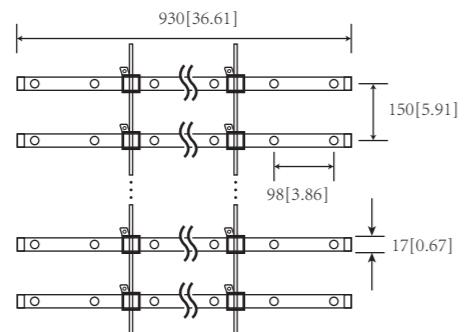

Application

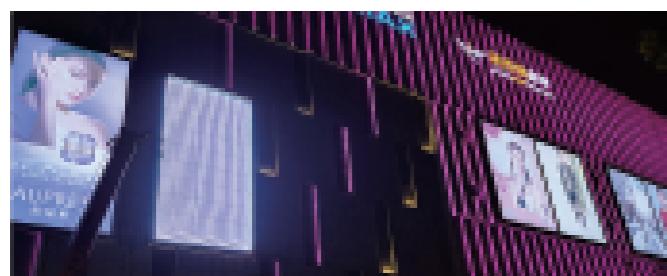

6~15cm depth

LED Rigid Bar

ZL6312 / 14 TA-K ZL6312 / 14 TC-K

- Straight structure design process, more stable quality.
- Secondary optical distribution, more uniform light.
- Roller shutter structure design, easy installation.




Parameters


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------------|-------|---------|-----------------|---------------------|------------|-------|---------|-----------------|
| ZL6312/14TA-K | 6500K | DC 12V | 1120/1302Lm/pcs | 93Lm/W | 12/14W/pcs | 12/14 | 20/10 | 947/1130*16.5mm |
| ZL6312/14TC-K | 6500K | DC 24V | 1120/1302Lm/pcs | 93Lm/W | 12/14W/pcs | 12/14 | 20/10 | 947/1130*16.5mm |

Dimension (Unit:mm/inch)

ZL6312/14TA-K ZL6312/14TC-K

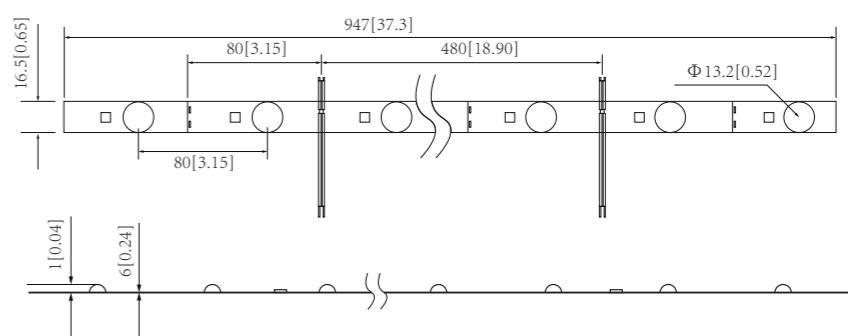

Application

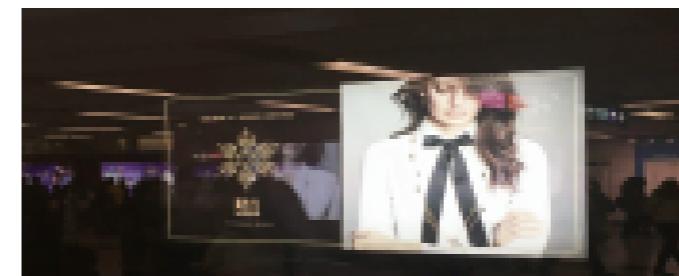

6~15cm depth

LED Rigid Bar

ZL7112TA-9A ZL7112TC-9A

- Secondary optical light distribution, uniform light.
- Flame retardant engineering plastics, high reliability.
- Roller shutter structure design, easy to install.
- High quality aluminum, good heat dissipation.



SMD

IP65

3

160°




Parameters


| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-------------|-------|---------|---------------|---------------------|---------|------|---------|------------|
| ZL7112TA-9A | 7000K | DC 12V | 1140Lm/pcs | 95Lm/W | 12W/pcs | 12 | 10 | 925*16.6mm |
| ZL7112TC-9A | 7000K | DC 24V | 1140Lm/pcs | 95Lm/W | 12W/pcs | 12 | 10 | 925*16.6mm |

Dimension (Unit:mm/inch)

ZL7112TA-9A ZL7112TC-9A

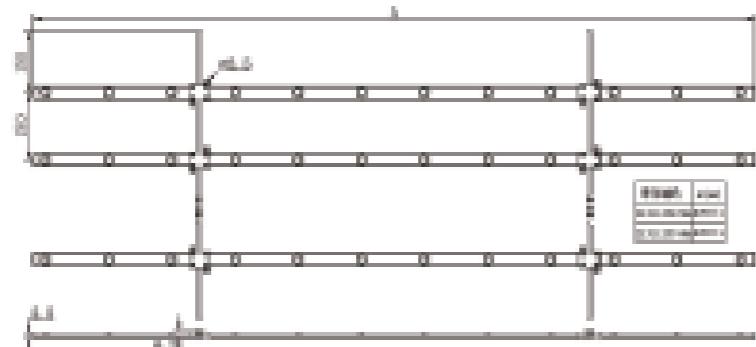

Application

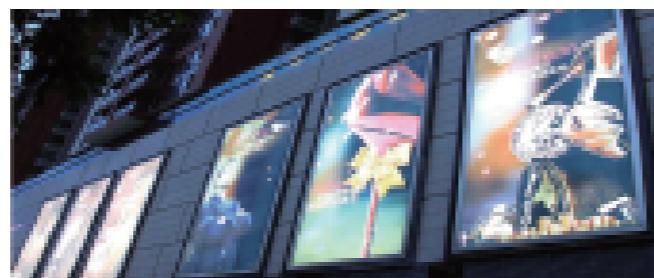

8~15cm depth

LED Rigid Bar

ZH7106THA-K ZH7112THA-K

- IP65 high protection.
- Secondary optical light distribution, uniform light.
- Flame retardant engineering plastics, high reliability.



SMD

IP65

3

160°




Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-------------|-------|---------|---------------|---------------------|---------|------|---------|-----------|
| ZH7106THA-K | 6500K | AC 220V | 575Lm/pcs | 115Lm/W | 5W/pcs | 6 | 20 | 595*15mm |
| ZH7112THA-K | 6500K | AC 220V | 1150Lm/pcs | 115Lm/W | 10W/pcs | 12 | 20 | 1185*15mm |

Dimension (Unit:mm/inch)

ZH7106THA-K ZH7112THA-K

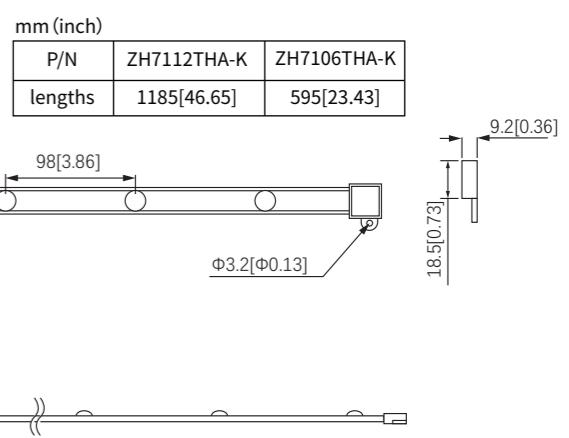

Application



8~15cm depth

LED Rigid Bar

ZH7406THA-K ZH7409THA-K
ZH7412THA-K ZH7414THA-K

- Secondary optical light distribution, uniform light.
- Flame retardant engineering plastics, high reliability.
- Good heat dissipation, long life.



10~40cm depth

LED Module

M906TD

- Secondary optical light distribution, only 4 modules for one square meter application.
- High brightness, good heat dissipation, energy saving.
- Various protection options.




Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size | |
|-------------|-------|---------|---------------|---------------------|-----------|------|---------|-------------|--|
| ZH7406THA-K | 7000K | AC 220V | 720Lm/pcs | 120Lm/W | 6W/pcs | 6 | 10 | 487*16mm | |
| ZH7409THA-K | 7000K | AC 220V | 1020Lm/pcs | 120Lm/W | 8.5W/pcs | 9 | 10 | 727*16mm | |
| ZH7412THA-K | 7000K | AC 220V | 1260Lm/pcs | 120Lm/W | 10.5W/pcs | 12 | 10 | 957*16mm | |
| ZH7414THA-K | 7000K | AC 220V | 1500Lm/pcs | 120Lm/W | 12.5W/pcs | 14 | 10 | 1150*16.5mm | |

Dimension (Unit):mm(inch)

ZH7406THA-K ZH7409THA-K ZH7412THA-K ZH7414THA-K

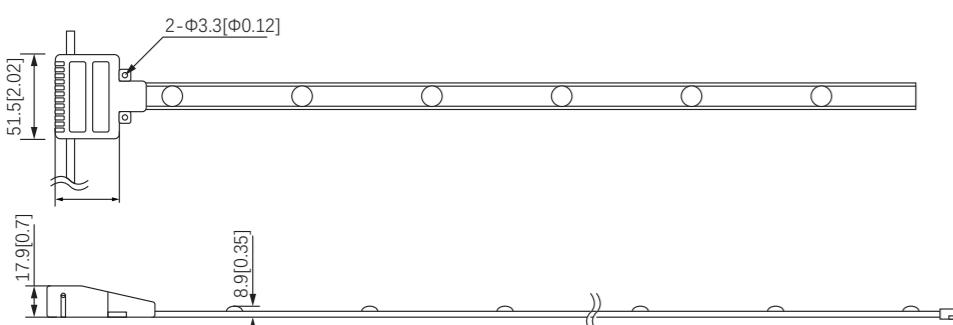

| mm (inch) | |
|-------------|-------------|
| P/N | lengths |
| ZH7406THA-K | 487[19.17] |
| ZH7409THA-K | 727[28.62] |
| ZH7412THA-K | 957[37.67] |
| ZH7414THA-K | 1150[45.27] |

Application




Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size | | | |
|--------|-------|---------|---------------|---------------------|--------|------|---------|------------|--|--|--|
| M906TD | 7000K | DC 24V | 450Lm/pcs | 150Lm/W | 3W/pcs | 6 | 20 | 181*27.5mm | | | |

Dimension (Unit):mm(inch)

M906TD

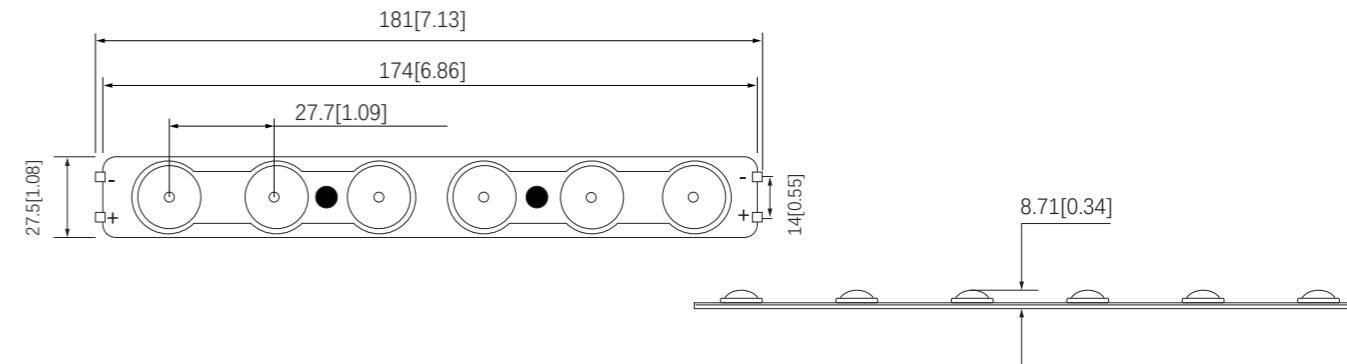

Application



10~40cm depth

LED Module

MA06TD


- Secondary optical light distribution, only 4 modules for one square meter application.
- High brightness, good heat dissipation, energy saving.
- Various protection options.



Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|--------|------|---------|------------|
| MA06TD | 6500K | DC 12V | 450Lm/pcs | 150Lm/W | 3W/pcs | 6 | 20 | 170*23.5mm |

Dimension (Unit):mm(inch)

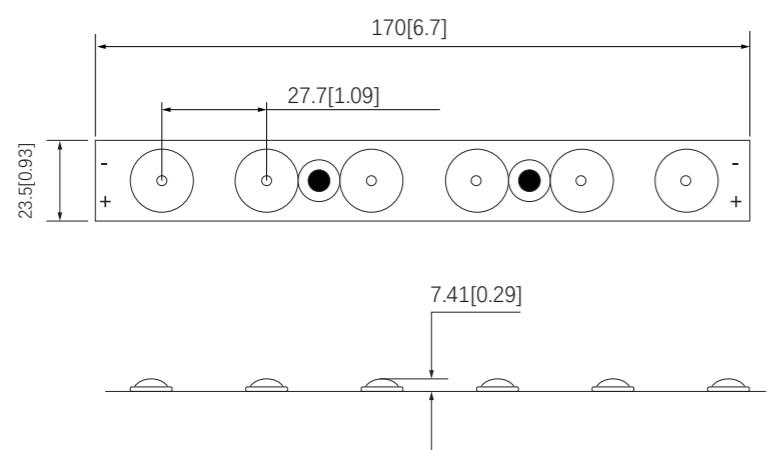

Application




8~12cm depth

LED Module

MKA14TC

- Secondary optical light distribution, uniform light emission.
- Single module can be cut, flexible light distribution.
- Support PWM, 0-10V, DALI, DMX dimming.



MKA14TC




MKA16QK




Parameters

| P/N | CCT/Wave Length | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-----------------|---------|---------------|---------------------|--------|------|---------|-------------|
| MKA14TC | 6500K | DC 24V | 396Lm/pcs | 99Lm/W | 4W/pcs | 4 | 20 | 67.8*67.8mm |
| MKA16QK | R 620-625nm | DC 24V | 105Lm/pcs | 35Lm/W | 3W/pcs | 6 | 20 | 67.8*67.8mm |
| MKA16QK | G 525-530nm | DC 24V | 105Lm/pcs | 35Lm/W | 3W/pcs | 6 | 20 | 67.8*67.8mm |
| MKA16QK | B 460-465nm | DC 24V | 105Lm/pcs | 35Lm/W | 3W/pcs | 6 | 20 | 67.8*67.8mm |

Dimension (Unit):mm(inch)

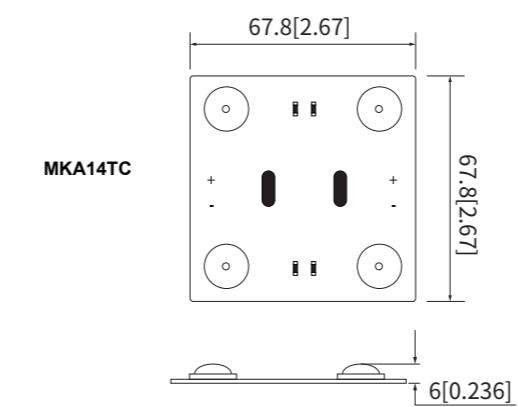

MKA14TC

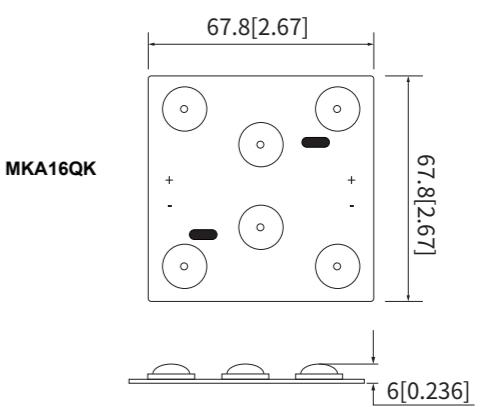

MKA16QK

Application




10~20cm depth


LED Rigid Bar

Z7124TX

- LED rigid bar for light boxes at the metro, high-speed rail and airport.
- Branded light source, high-end constant current solution.
- Surface illuminance up to 3000lux, minimum power per square meter 36W/m².

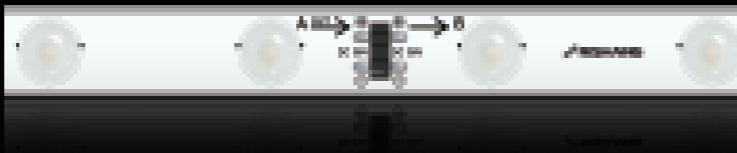

SMD IP65 5 160°
Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|----------|------|---------|-----------|
| Z7124TX | 6500K | DC 36V | 1260Lm/pcs | 133Lm/W | 9.5W/pcs | 24 | 1 | 1470*18mm |

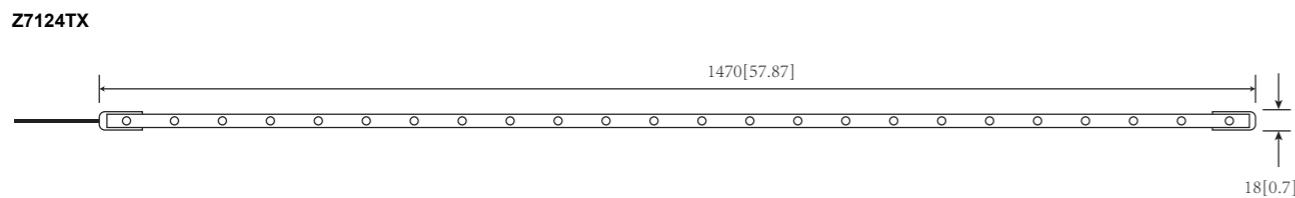
Dimension (Unit):mm(inch)

Application

Parameters
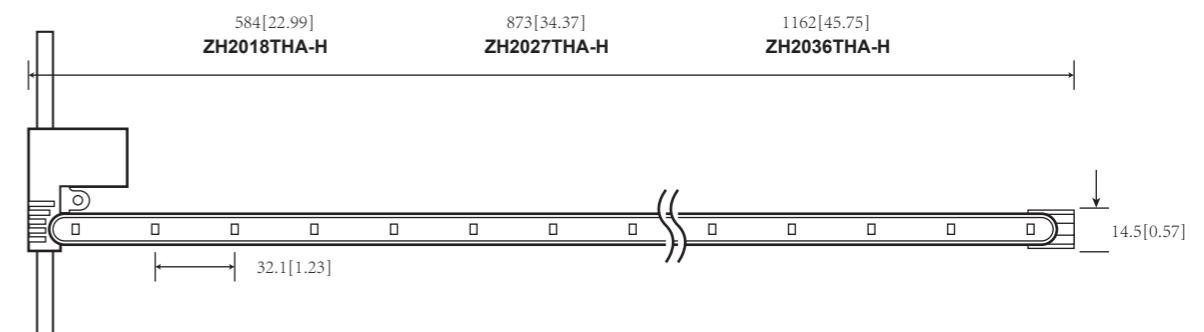
| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-------------|-------|---------|---------------|---------------------|----------|------|---------|-----------------|
| ZH2018THA-H | 7000K | AC 220V | 632Lm/pcs | 115Lm/W | 5.5W/pcs | 18 | 15 | 584*14.5*9.8mm |
| ZH2027THA-H | 7000K | AC 220V | 955Lm/pcs | 115Lm/W | 8.3W/pcs | 27 | 15 | 873*14.5*9.8mm |
| ZH2036THA-H | 7000K | AC 220V | 1265Lm/pcs | 115Lm/W | 11W/pcs | 36 | 15 | 1162*14.5*9.8mm |

Dimension (Unit):mm(inch)

Application


10~20cm depth

LED Rigid Bar

ZH2115THA-H / ZH2130THA-H


- Built-in constant current power supply, cost saving.
- 220V input voltage, fast installation and labor saving.
- Plastic insulation structure, protection against electric shock and leakage.





Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-------------|-------|---------|---------------|---------------------|---------|------|---------|-------------|
| ZH2115THA-H | 7000K | AC 220V | 625Lm/pcs | 125Lm/W | 5W/pcs | 15 | 20 | 575*13*8mm |
| ZH2130THA-H | 7000K | AC 220V | 1250Lm/pcs | 125Lm/W | 10W/pcs | 30 | 20 | 1175*13*8mm |

Dimension (Unit):mm(inch)

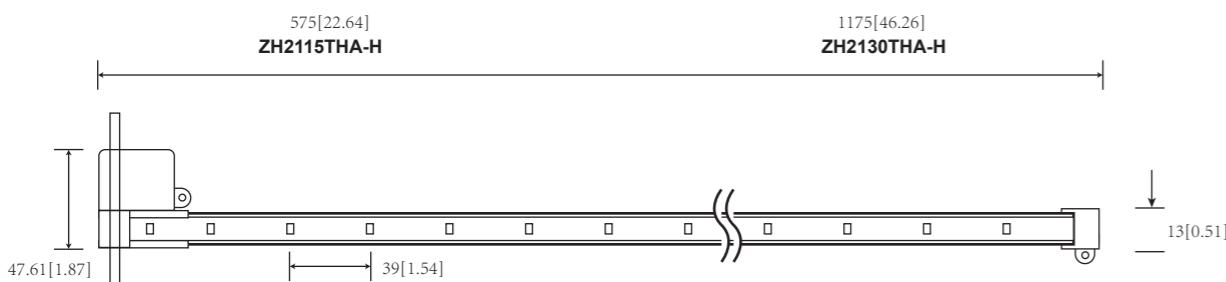

Application

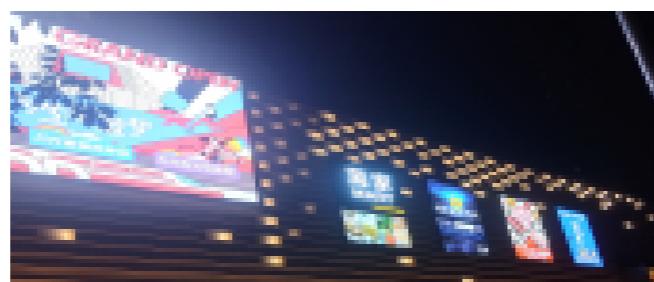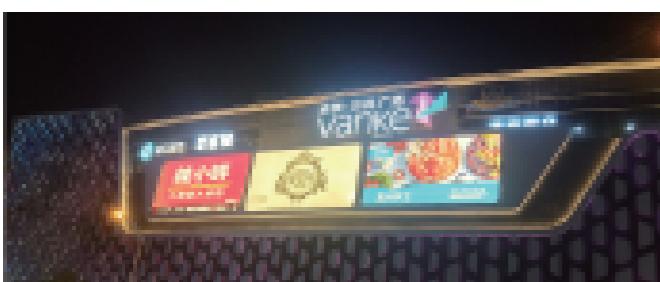

10~20cm depth

LED Rigid Bar

Z1F18TA-A / Z1F30TA-A / Z1F36TA-A


- High-end aluminum profile, silica gel coating.
- Cost-effective.



Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|-----------|-------|---------|---------------|---------------------|----------|------|---------|-----------|
| Z1F18TA-A | 9000K | DC 12V | 279Lm/pcs | 71.5Lm/W | 3.9W/pcs | 18 | 20 | 600*12mm |
| Z1F30TA-A | 9000K | DC 12V | 470Lm/pcs | 70Lm/W | 6.7W/pcs | 30 | 10 | 1000*12mm |
| Z1F36TA-A | 9000K | DC 12V | 542Lm/pcs | 69.5Lm/W | 7.8W/pcs | 36 | 10 | 1200*12mm |

Dimension (Unit):mm(inch)

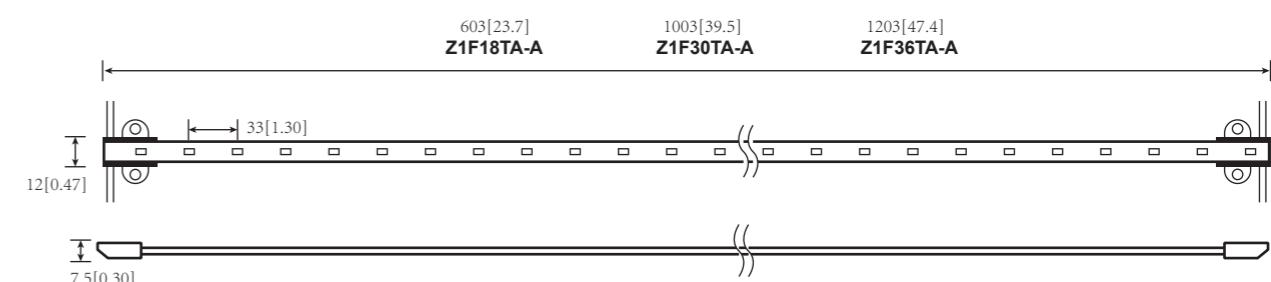

Application





LED Light Box illumination

double side

► Rishang's double-sided light box light sources mainly adopt edge-lit straight bar structure, which can be widely used in rather deep double-sided light boxes with long lighting distance. The products use high-end brand LED diodes, high thermal conductive aviation aluminum substrate and wide angle optical design, and some of them can be flexibly cut and dimmed. The products have the advantages of high brightness, uniform light, low energy consumption, easy installation, making the the pictures of advertising light boxes look bright, uniform, clear and natural.

5~10cm depth
LED Module

M933QB



- Side-light module light box light source.
- five years warranty.



SMD **IP65** **5**

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|-----------|------|---------|-----------------|
| M933QB | 6500K | DC 12V | 250Lm/pcs | 86Lm/W | 2.88W/pcs | 3 | 20 | 120*23.2*11.6mm |

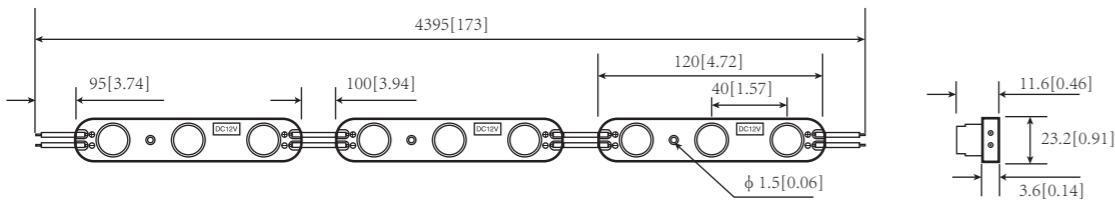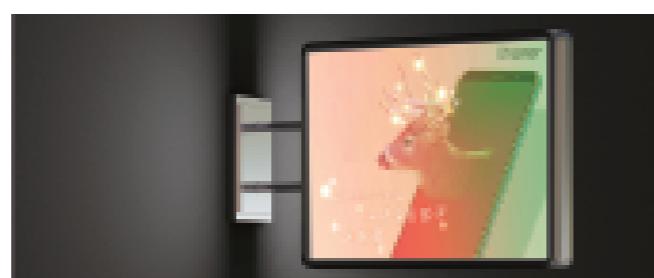**Dimension (Unit):mm(inch)****M933QB****Application**

>10cm depth
LED Module

M901QB


- Edge-lit light source for light box.
- Cost-effective .



SMD **IP65** **3**

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|--------|-------|---------|---------------|---------------------|----------|------|---------|--------------|
| M901QB | 6000K | DC 12V | 100Lm/pcs | 91Lm/W | 1.2W/pcs | 1 | 20 | 44*28*14.5mm |

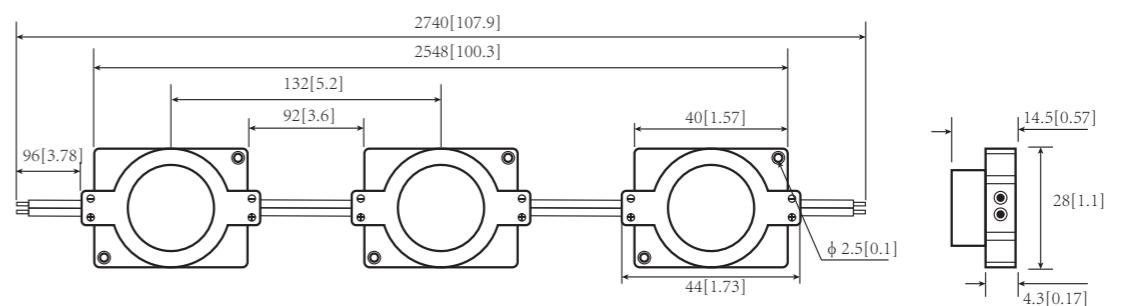**Dimension (Unit):mm(inch)****M901QB****Application**

>8cm depth

LED Module

M911QB-1

- Edge-lit light source for light box.
- Using 3030 high power LED, long life.
- Constant current technology, more stable.



SMD **IP65** **(3)** **19°~32°**

Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|----------|-------|---------|---------------|---------------------|--------|------|---------|--------------|
| M911QB-1 | 6000K | DC 12V | 188Lm/pcs | 94Lm/W | 2W/pcs | 1 | 25 | 50*30*13.8mm |




4~8cm depth

LED Module

MG903DB

- High power, 5w per module.
- Double-sided lighting.
- Surface uniformity up to 80%.

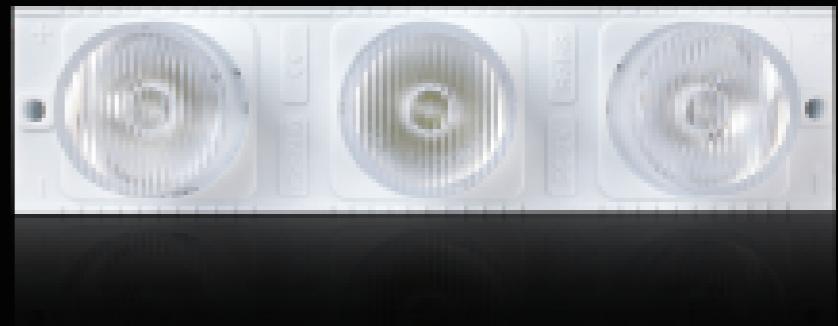

SMD **IP65** **(3)** **8°~18°**


Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|--------|------|---------|----------|
| MG903DB | 6400K | DC 12V | 400Lm/pcs | 79Lm/W | 5W/pcs | 3 | 15 | 128*32mm |




Dimension (Unit):mm(inch)

M911QB-1

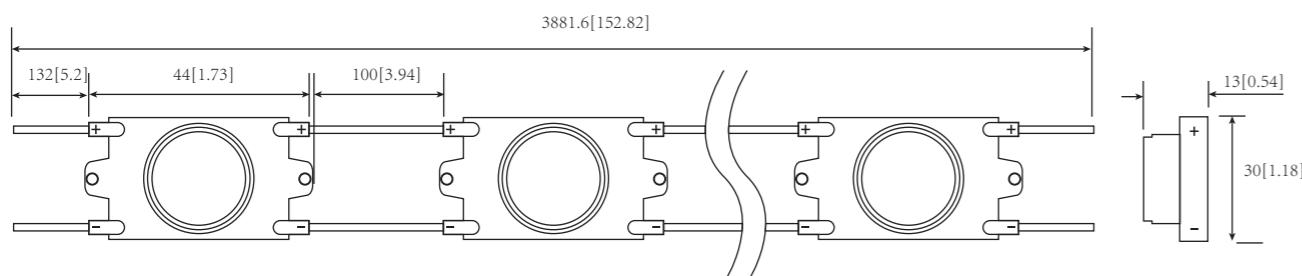


Dimension (Unit):mm(inch)

MG903DB

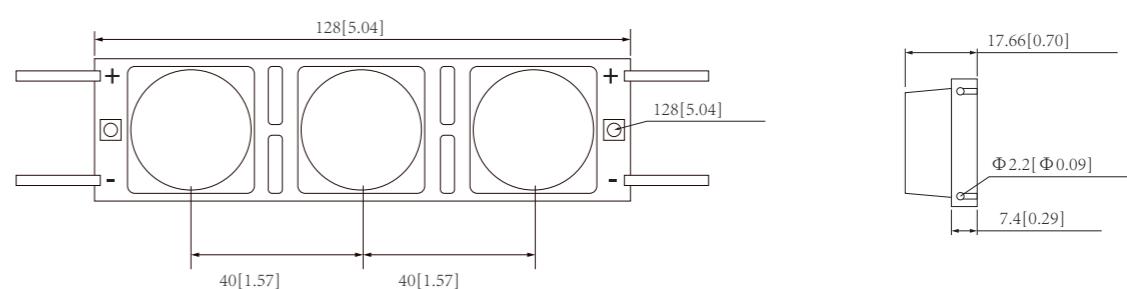

Application

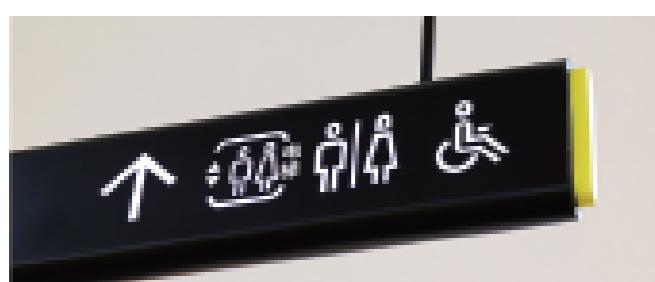


Application





≥8cm depth
LED Rigid Bar

Z6110QA / Z6120QA


- High thermal conductivity aluminum board, good heat dissipation performance, safe and reliable.
- Can be cut every single LED, more convenient to use.

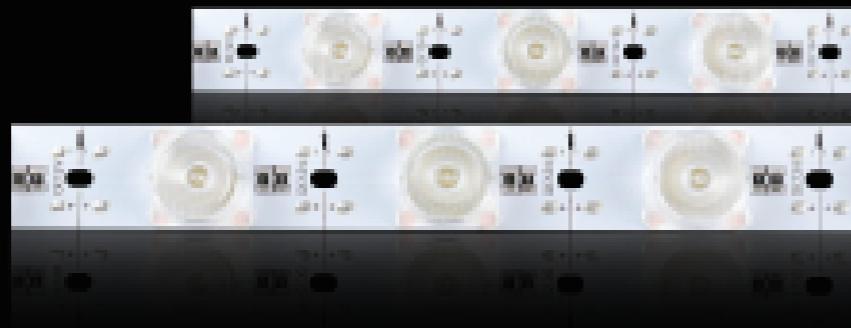**Parameters**

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|---------|------|---------|-------------|
| Z6110QA | 7000K | DC 12V | 1710Lm/pcs | 95Lm/W | 18W/pcs | 10 | 2 | 459*22*13mm |
| Z6120QA | 7000K | DC 12V | 3420Lm/pcs | 95Lm/W | 36W/pcs | 20 | 1 | 990*22*13mm |

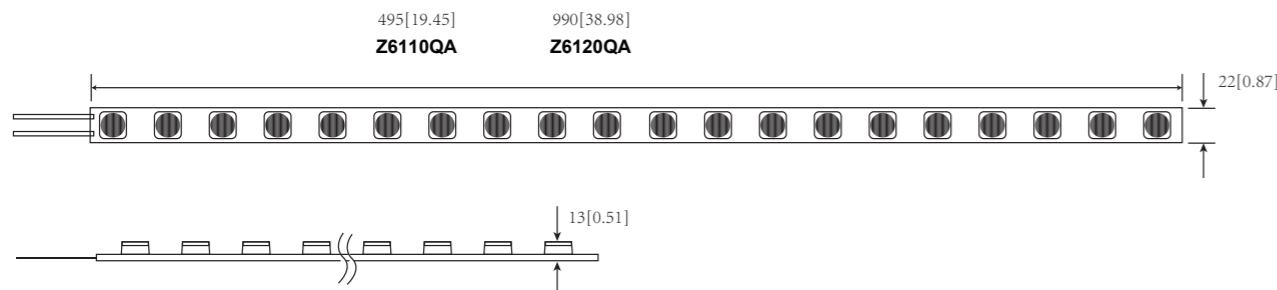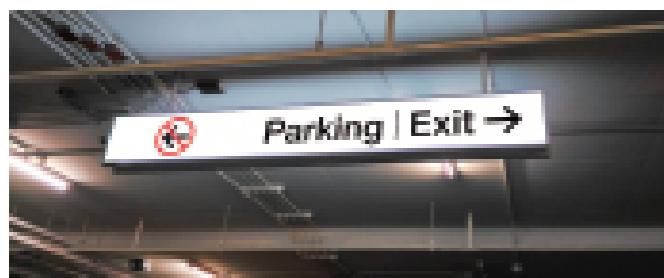Dimension (Unit):mm(inch)**Application****Parameters**

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|---------|------|---------|--------------|
| Z9110QA | 7000K | DC 12V | 1710Lm/pcs | 95Lm/W | 18W/pcs | 10 | 1 | 505*29*16mm |
| Z9120QA | 7000K | DC 12V | 3420Lm/pcs | 95Lm/W | 36W/pcs | 20 | 1 | 1000*29*16mm |

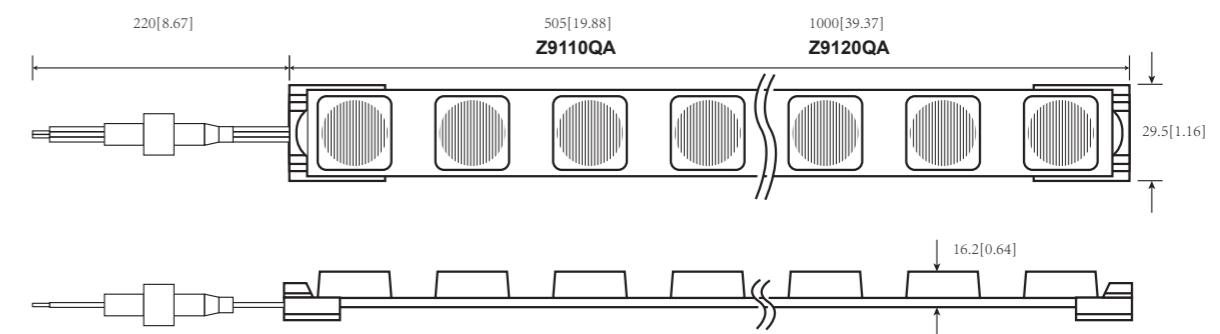Dimension (Unit):mm(inch)**Application**

14-40cm depth

LED Rigid Bar

Z6203DD / Z6205DD / Z6207DD / Z6209DD


- ① Unique lens design for long size light box lighting, good uniform light.
- ② Dimmable, easy to be adjusted to the optimal brightness at different time period.
- ③ Energy saving, environmentally friendly.



Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|-----------|------|---------|----------|
| Z6203DD | 6500K | DC 24V | 712Lm/pcs | 95Lm/W | 8W/pcs | 3 | 15 | 170*30mm |
| Z6205DD | 6500K | DC 24V | 1250Lm/pcs | 100Lm/W | 12.5W/pcs | 5 | 9 | 270*30mm |
| Z6207DD | 6500K | DC 24V | 1750Lm/pcs | 100Lm/W | 17.5W/pcs | 7 | 6 | 370*30mm |
| Z6209DD | 6500K | DC 24V | 2137Lm/pcs | 95Lm/W | 22.5W/pcs | 9 | 5 | 480*30mm |

Dimension (Unit):mm(inch)

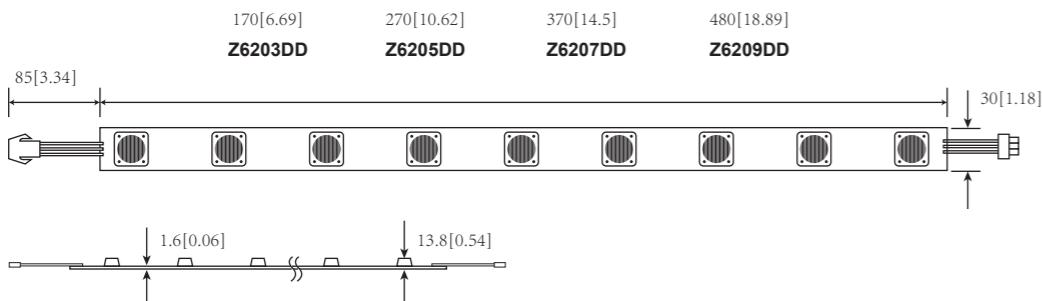

Application




≥8cm depth

LED Rigid Bar

Z7003WD / Z7005WD


- ① Famous brand LED, high-end quality.
- ② Dimmable.
- ③ IP65 protection, 5 years warranty.

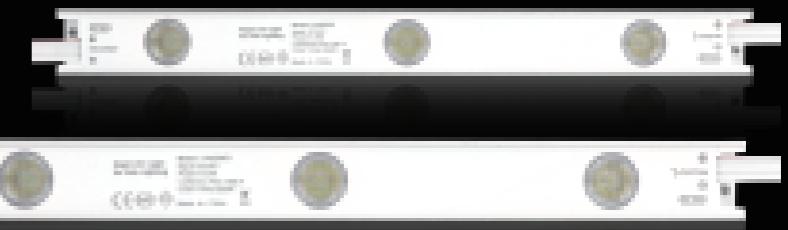


Parameters

| P/N | CCT | Voltage | Luminous Flux | Luminous Efficiency | Power | LEDs | Max Run | Size |
|---------|-------|---------|---------------|---------------------|-----------|------|---------|----------|
| Z7003WD | 6000K | DC 24V | 720Lm/pcs | 110Lm/W | 6.5W/pcs | 3 | 1 | 323*30mm |
| Z7005WD | 6000K | DC 24V | 1200Lm/pcs | 110Lm/W | 10.5W/pcs | 5 | 1 | 543*30mm |

Dimension (Unit):mm(inch)

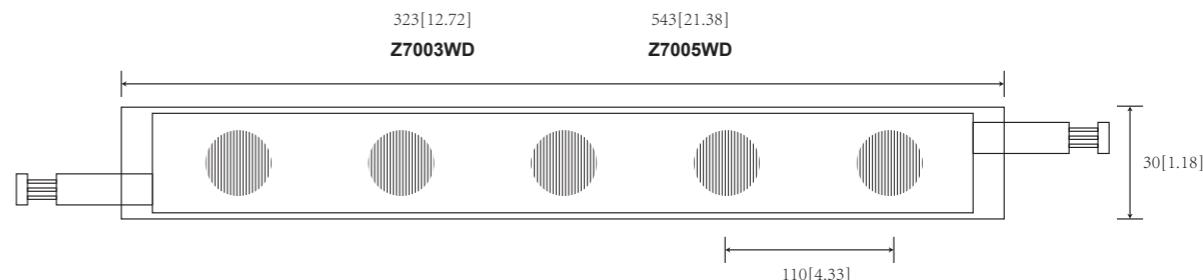

Application

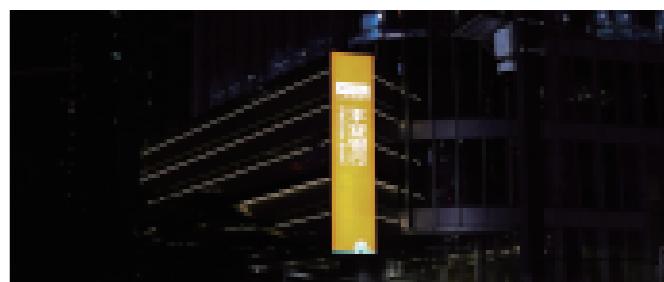

POWER SUPPLY

► Our products adopt advanced and stable circuit design, select brand components, and pass 100% full load aging test to ensure the high quality and stability of LED power supply. It can be widely used in indoor and outdoor advertising, signage, light box lighting and other scenes.



PE Series**IP67****12V/24V****30W / 60W / 100W / 150W / 200W / 240W / 300W / 320W / 400W**

- Wide voltage input AC100-240V, suitable for multiple countries and regions.
- High efficiency, power factor PF≥0.95.
- Full series certification, certified by CCC, TUV-Mark, UKCA, CE, RoHS, RCM, CB.
- Equipped with overvoltage, overcurrent, and short-circuit protection functions.
- 5-year warranty.

**Parameters**

| P/N | Input Voltage | Voltage | Power | Input Current | Output Current | Size | Weight |
|---------------|---------------|---------|-------|---------------|----------------|-------------|--------|
| PE30-12-BC01 | AC100-240V | DC12V | 30W | ≤0.40A | 2.50A | 170*40*29mm | 0.35kg |
| PE30-24-BC01 | AC100-240V | DC24V | 30W | ≤0.40A | 1.25A | 170*40*29mm | 0.35kg |
| PE60-12-BC01 | AC100-240V | DC12V | 60W | ≤0.79A | 5.00A | 153*68*37mm | 0.62kg |
| PE60-24-BC01 | AC100-240V | DC24V | 60W | ≤0.79A | 2.50A | 153*68*37mm | 0.62kg |
| PE100-12-BC01 | AC100-240V | DC12V | 100W | ≤1.22A | 8.33A | 163*68*37mm | 0.69kg |
| PE100-24-BC01 | AC100-240V | DC24V | 100W | ≤1.22A | 4.17A | 163*68*37mm | 0.69kg |
| PE150-12-BC01 | AC100-240V | DC12V | 150W | ≤1.81A | 12.50A | 185*68*37mm | 0.79kg |
| PE150-24-BC01 | AC100-240V | DC24V | 150W | ≤1.81A | 6.25A | 185*68*37mm | 0.79kg |
| PE200-12-BC01 | AC100-240V | DC12V | 200W | ≤2.44A | 16.67A | 217*68*37mm | 0.98kg |
| PE200-24-BC01 | AC100-240V | DC24V | 200W | ≤2.44A | 8.33A | 217*68*37mm | 0.98kg |
| PE240-12-BC01 | AC100-240V | DC12V | 240W | ≤2.93A | 20.00A | 217*68*37mm | 0.98kg |
| PE240-24-BC01 | AC100-240V | DC24V | 240W | ≤2.93A | 10.00A | 217*68*37mm | 0.98kg |
| PE300-12-BC01 | AC100-240V | DC12V | 300W | ≤3.62A | 25.00A | 251*86*42mm | 1.66kg |
| PE300-24-BC01 | AC100-240V | DC24V | 300W | ≤3.62A | 12.50A | 251*86*42mm | 1.66kg |
| PE320-12-BC01 | AC100-240V | DC12V | 320W | ≤3.86A | 26.66A | 251*86*42mm | 1.66kg |
| PE320-24-BC01 | AC100-240V | DC24V | 320W | ≤3.86A | 13.32A | 251*86*42mm | 1.66kg |
| PE400-12-BC01 | AC100-240V | DC12V | 400W | ≤4.78A | 33.32A | 251*86*42mm | 1.66kg |
| PE400-24-BC01 | AC100-240V | DC24V | 400W | ≤4.78A | 16.66A | 251*86*42mm | 1.66kg |

PA Series**12V/24V****100W / 200W / 300W / 400W**

- Ultra-thin, thickness only 22mm.
- Fanless design, no noise.
- Over-voltage, over-current and short-circuit protection function.
- 3 years warranty, can provide third party quality inspection report.

**Parameters**

| P/N | Input Voltage | Voltage | Power | Input Current | Output Current | Size | Weight |
|----------|---------------|---------|-------|---------------|----------------|---------------|---------|
| PA100-12 | AC200-240V | DC12V | 100W | ≤1.2A | 8.3A | 415*398*268mm | 0.224kg |
| PA100-24 | AC200-240V | DC24V | 100W | ≤1.2A | 4.16A | 415*398*268mm | 0.224kg |
| PA200-12 | AC200-240V | DC12V | 200W | ≤2.5A | 16.7A | 415*398*268mm | 0.288kg |
| PA200-24 | AC200-240V | DC24V | 200W | ≤2.5A | 8.3A | 415*398*268mm | 0.288kg |
| PA300-12 | AC200-240V | DC12V | 300W | ≤3.2A | 25A | 380*360*240mm | 0.379kg |
| PA300-24 | AC200-240V | DC24V | 300W | ≤3.2A | 12.5A | 380*360*240mm | 0.379kg |
| PA400-12 | AC200-240V | DC12V | 400W | ≤4.5A | 33.3A | 380*360*240mm | 0.499kg |
| PA400-24 | AC200-240V | DC24V | 400W | ≤4.5A | 16.7A | 380*360*240mm | 0.499kg |

PL Series**12V/24V****100W / 200W / 30W0 / 400W**

- Wide voltage input.
- Working temperature range -25°C~+60°C.
- Have OCP, SCP protection function.

**PB Series****12V/24V****200W / 400W**

- Semi-potted process, moisture-proof, rain-proof, corrosion-proof.
- Cost-effective, high reliability, can provide third-party quality inspection report.
- Fanless, silent design.
- Over-voltage, over-current and short-circuit protection function.
- 3 years warranty.

**Parameters**

| P/N | Input Voltage | Voltage | Power | Input Current | Output Current | Size | Weight |
|----------|---------------|---------|-------|---------------|----------------|----------------|---------|
| PL100-12 | AC200-240V | DC12V | 100W | ≤1.2A | 8.3A | 124*74*38mm | 0.248kg |
| PL100-24 | AC200-240V | DC24V | 100W | ≤1.2A | 4.16A | 124*74*38mm | 0.248kg |
| PL200-12 | AC200-240V | DC12V | 200W | ≤2.5A | 16.7A | 171*91*51.5mm | 0.41kg |
| PL300-12 | AC200-240V | DC12V | 300W | ≤3.2A | 25A | 171*91*51.5mm | 0.43kg |
| PL400-12 | AC200-240V | DC12V | 400W | ≤4.5A | 33A | 185*120*51.5mm | 0.54kg |
| PL400-24 | AC200-240V | DC24V | 400W | ≤4.5A | 16.6A | 185*120*51.5mm | 0.54kg |

Parameters

| P/N | Input Voltage | Voltage | Power | Input Current | Output Current | Size | Weight |
|----------|---------------|---------|-------|---------------|----------------|--------------|----------|
| PB200-12 | AC200-240V | DC12V | 200W | ≤2.5A | 16.7A | 185*95*49mm | 0.678 kg |
| PB200-24 | AC200-240V | DC24V | 200W | ≤2.5A | 8.3A | 185*95*49mm | 0.678 kg |
| PB400-12 | AC200-240V | DC12V | 400W | ≤4.5A | 33.3A | 216*118*51mm | 0.978 kg |
| PB400-24 | AC200-240V | DC24V | 400W | ≤4.5A | 16.7A | 216*118*51mm | 0.978 kg |

PJ Series**400W****12V/24V**

- Voltage input.
- Working temperature range -35°C~+60°C
- Have OCP, OTP protection function.

**PJ Series****12V/24V****400W**

- Voltage input.
- Working temperature range -35°C~+60°C
- Have OCP, OTP protection function.

**Parameters**

| P/N | Input Voltage | Voltage | Power | Input Current | Output Current | Size | Weight |
|----------------|---------------|---------|-------|---------------|----------------|------------------|--------|
| PJF400-12A-B01 | AC200-240V | DC12V | 400W | ≤4.5A | 33.3A | 183.5*116*47.5mm | 0.42kg |
| PJF400-24A-B01 | AC200-240V | DC24V | 400W | ≤4.5A | 16.7A | 183.5*116*47.5mm | 0.42kg |

Parameters

| P/N | Input Voltage | Voltage | Power | Input Current | Output Current | Size | Weight |
|----------------|---------------|---------|-------|---------------|----------------|--------------|--------|
| PJF400-12B-B01 | AC200-240V | DC12V | 400W | ≤4.5A | 33.3A | 200*118*51mm | 0.65kg |
| PJF400-24B-B01 | AC200-240V | DC24V | 400W | ≤4.5A | 16.7A | 200*118*51mm | 0.65kg |



RISHANG INTRODUCTION

RISHANG OPTOELECTRONICS CO.,LTD

Founded in 2007, Rishang Optoelectronics is a national high-tech enterprise integrating the research, development, production, sales, and service of LED lighting products for signage, box, and education as well as linear lighting. Rishang Optoelectronics has focused on LED lighting for 20 years with strong R&D power. It has employed many Senior R&D staffs for LED lighting products to prepare for related industrial standards, which gained over 600 patents and qualifications for the company.

Rishang Optoelectronics is the wholly-owned subsidiary of Mason Tech (stock code 002654), the state owned listed company. Mason Tech has established LED industrial bases in many places including Guangming District in Shenzhen, Songshan Lake in Dongguan, Xiantao city in Hubei, and is qualified for Witness Laboratory Authorization in American UL and in Rheinland Germany TUV and has completed establishing the first light efficiency simulation and test center for LED signage lighting in China. The company has a wide range of products, many of which have passed international and domestic certifications such as UL, CE, RoHS, BIS, CSA, RCM, SAA, CCC, CQC, explosion-proof, energy-saving, etc. The factory has passed the ISO9001、ISO4001、ISO45001 international quality management system certification. The products have been widely used in many places and industries like large transportation hub, commercial syntheses, brand chain stores, finance and insurance, supermarkets, 3C electronics, petrol station, automobile, clothing, catering, hotels, home decoration, schools and training. And have cooperated with well-known enterprises worldwide.

State-owned Enterprise

Changjiang River Industrial Investment Group Co., Ltd
The largest industrial investment group in Hubei Province.

Shenzhen Stock Exchange Listed Enterprises

MASON Technology (002654)
Top 50 in China LED industry by revenue

National High-tech Enterprise

Obtained over 600 patents and qualifications

COMPANY HISTORY



2007
• Rishang Optoelectronics Co., LTD.
• founded in Shenzhen

2009
• Set up SMD LED Encapsulation Division
• Set up reliability lab for solid-state lighting

2008
• Set up Rishang R&D centre
• Attained ISO9001 Quality Management System Certification
• Set up the 1st full-automatic SMT module production line in China
• Established nationwide sales network system

2011
• Brought in production line with RoHS standard,
and all products were RoHS compliant
• Set up Rishang LED GmbH
• Honored as 'Top 100 Enterprises of LED Lighting Applications in China'
• Applied for more than 100 patents

2012
• Honored as 'National High-tech Enterprise'
Led and drafted the industrial standard report for
signage lighting and flex lighting

2013
• Set up TÜV key lab and UL WTDP lab
• Set up Shenzhen Lighting Environment
Monitor and Testing Center
• Honored as 'Shenzhen Famous Brand'
• Attained ISO9001 Environmental
Management System Certification

2014
• Honored as 'National Famous Brand'
in Guangdong Province'

2017
• Honored as 'National High-tech Enterprise'

2020
• Won the certificate of CSAIII

2016
• Owned the earliest and most complete COB full-automatic production line in China
• Honored as 'Well-known enterprises in Shenzhen'
• TOP 10 LED lighting enterprises in international competitiveness in China

2015
Entered into capital market (Stock code: 002654)

2019
• Won the 'Light' and 'Lightdot' Award

2022
• Set the Specification for energy
efficiency minimum allowable
values and energy efficiency
grades of LED strip lights

2024
• Thailand Plant Launch

2023
• Honored as the SRDI Enterprises in Shenzhen
• Honored as 'Well-known Enterprises in Shenzhen'


COMPANY BACKGROUND

Rishang Optoelectronics., a wholly-owned subsidiary of the state-controlled listed enterprise, Mason Technology (stock code 002654). With a solid financial foundation, reasonable management, and outstanding operation capabilities, Rishang has become the top brand in the fields of high-end LED signage and linear lighting, and participated in the draft of LED lighting standards in Shenzhen & Guangdong Province, which contributes to the standardized development of LED lighting industry.



IPD R&D PROCESS

Integrated Product Development (IPD) is a tried and trusted program level solution that formulates strategy whilst coordinating and prioritising the individual project contributions of a innovative and feedback based product development continuum. With a perfect IPD R&D process, we strictly follow the development process to make the product design more in line with the market demand and with more guaranteed quality.

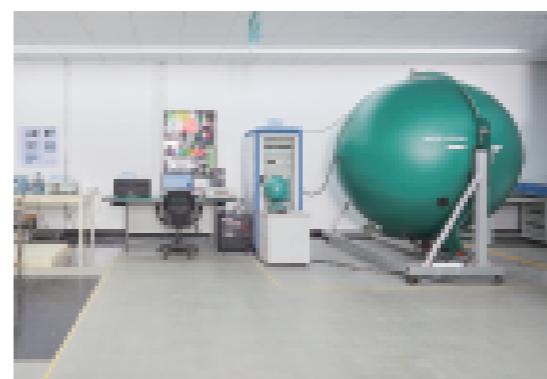

20+
IPD R&D Process

50+
R&D Teams

600+
Patents and Qualifications

TÜV
German TÜV Authorized Lab



QUALITY MANAGEMENT SYSTEMS

Rishang is certified by the quality systems that complies with the ISO 9001-2015, ISO14001-2015, ISO 45001, ISO 10012-2003 standards for the whole production cycle, the logistics and the marketing activities of its products. Upgrading the manufacturing process, to provide better products for the customers.



State-Controlled

► HOLDING

listed company

► 100% HOLDING

National High-tech Enterprise

Changjiang River Industrial Investment Group Co., Ltd

Shenzhen Mason Technology Co., Ltd

The largest industrial investment group in Hubei Province


Top 50 in the LED Industry by Revenue

Shenzhen Rishang Optoelectronics Co., Ltd

Aim to be a first-class provider of healthy and intelligent LED lighting.

INTELLIGENT MANUFACTURING


Rishang has an independent industrial park with over 30,000 square meters of modern workshops. We have built the first fully automatic SMT module production line and the first and most integrated COB flexible LED strip automatic production line in China, which ensures product quality and production capacity.

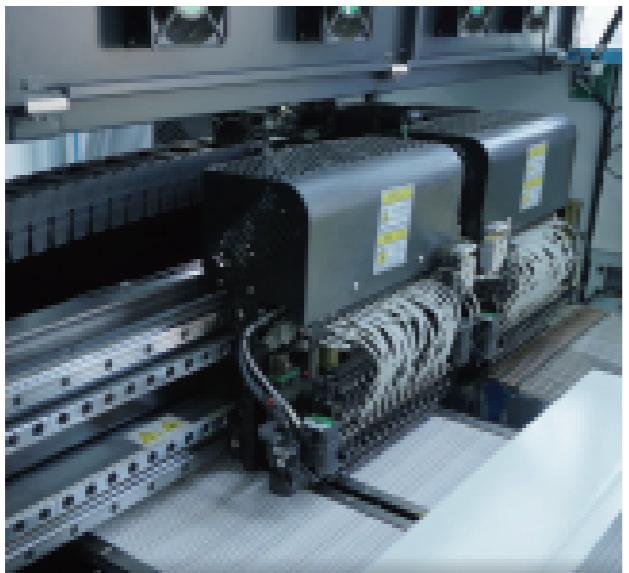

LABORATORY

ADVERTISEMENT & SIGN LIGHTING ENVIRONMENT MONITOR AND TESTING CENTER

RISHANG has set up TÜV key lab and the linear lighting environment monitor and testing center in China. And from LED encapsulation, to product development in accordance with IPD process, and daily production quality control, a set of strict reliability test standard from the comprehensive parameters, such as optical, electrical, thermal parameter of the product and environmental reliability testing, lighting lifespan test.

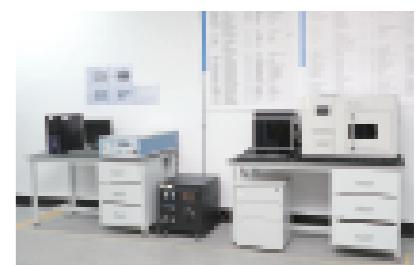


Electrical Test



Break Test



EMC Test



Accelerated Life Test



Safety Test



IP Grade Test



Environmental & Reliability Test



Optical Performance Test

HONOR & QUALIFICATION

Rishang has been in the field of LED lighting for 20 years with strong R&D power and has participated in the draft of lighting industrial standards. Now the company has attained over 600 patents and qualifications.

Qualifications:



Awards:



Patents:



Has obtained more than 600 patents and qualifications

Standard setting:

Province-level Standard
Led Strip
Outdoor advertising lights

City-level standard
Led Module for channel letter
Led Module for advertising light-box

Group-level Standard
Standard of Sinage enterprise design qualification
Standard of Sinage enterprise manufacturing qualification
Standard of Sinage enterprise installation qualification

MARKETING NETWORK

Global: RISHANG has realized globalized precise marketing services, set up an international sales department and a German subsidiary, with an international marketing team of more than 50 people.



【 Global Branches of Rishang】



【 Stores of Rishang 】

The products have been widely used in many places and industries like large transportation hub (airport, underground railway, high-speed railway and intercity railway), commercial syntheses, brand chain stores, finance and insurance, supermarkets, 3C electronics, petrol station, automobile, clothing, catering, hotels, home decoration, schools and training institutions. And have cooperated with well-known enterprises worldwide such as Mercedes-Benz, BMW, Microsoft, Huawei, MI, VIVO, Sinopec, CNPC, Tesla Inc, Xiaomi, BYD, ICBC, Agricultural Bank of China, Walmart, JD.COM, Gome, Vanke and Wanda Group. Besides, it is also the high-quality supplier for providing integrated solutions to the Asian Games, World Expo, CCTV Spring Festival Evening Gala, commercial syntheses and traffic hubs LED lighting and healthy



International Sales Department

info@ledlamps.com.cn

Subsidiary in Germany

rishang.europe@ledlamps.com.cn