

Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Multi Spot 4

4 accent Spot LED module can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture (from 20-100%), DALI and 0-10V (from 10-100%). Standard beam spread is 11° additional interchangeable lenses available in 20° and 30°, and elliptical beam spread.

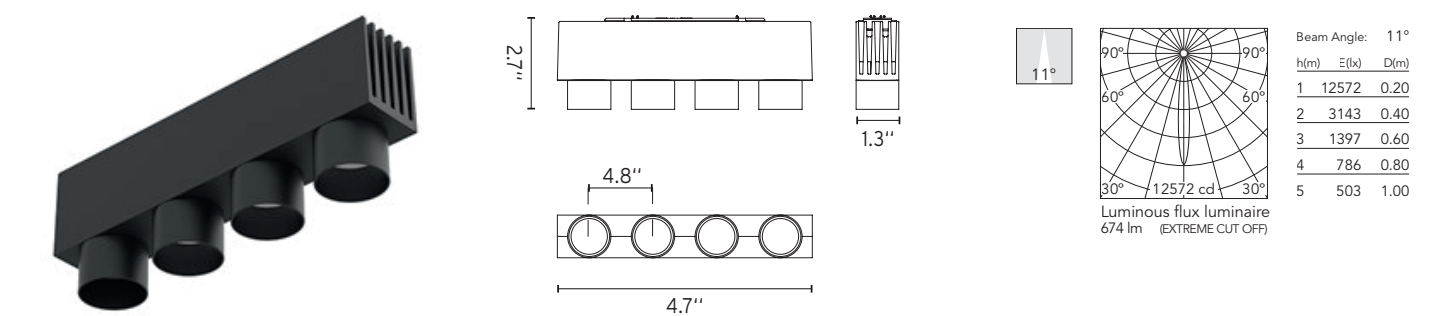


Table with 9 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Beam Spread, Part Number, Finish, Dimming Protocol. It lists specifications for 3000K and 2700K versions of the fixture.

Optional Accessories

Table with 3 columns: Flood Lens Accessory 20° Field Changeable, Wide Flood Lens Accessory 30° Field Changeable, Elliptical Lens Accessory Field Changeable 10° x 40°. Each column includes a part number and an image of the lens.