


Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Spot Module

Accent LED Spot modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture DALI from 1-100% and 0-10V from 10-100%. Standard beam spread is 14°. Additional interchangeable lenses available in 23° and 33°, and 10° x 40° elliptical beam spread.

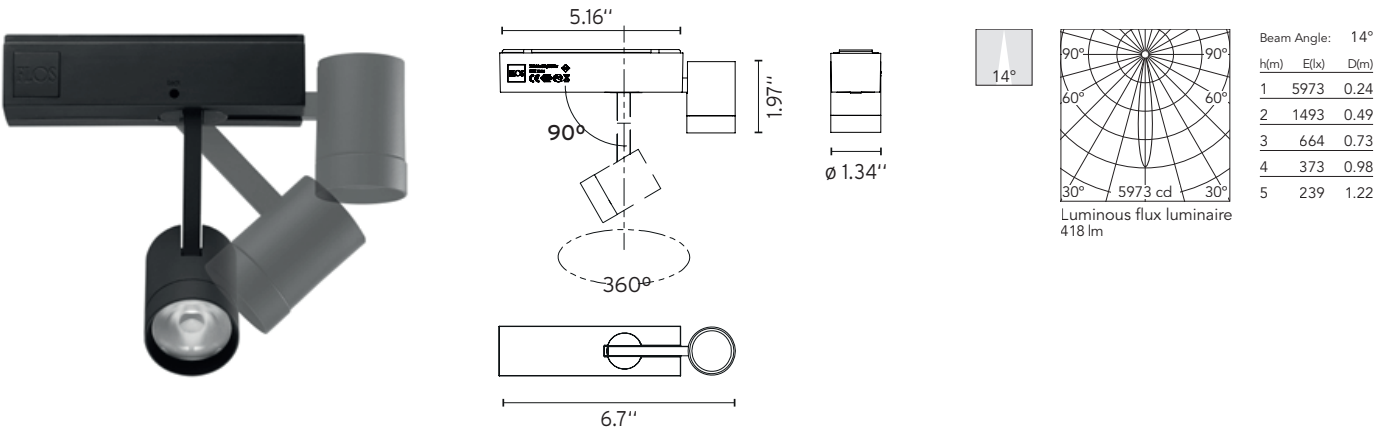

How to Specify ex. 03.6302.14A90

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
2700K	90	550lm	404lm	8W	14°	03.6303	■ 14 = Black	B90 = Dimmable on board CDD = DALI B9V = 0-10V
3000K	90	600lm	418lm	8W	14°	03.6302		

Optional Accessories

Flood Lens Accessory 23° Field Changeable	Wide Flood Lens Accessory 33° Field Changeable	Elliptical Lens Accessory Field Changeable 10° x 40°	Extra long snoot for added shielding in aluminum with black finish (does not protude from channel when tucked up into housing)
Part Number: 08.8760.00	Part Number: 08.8761.00	Part Number: 08.8759.00	Part Number: 08.8427.14
			