



## Light Shadow PRO 60 Adjustable - Quick Ship

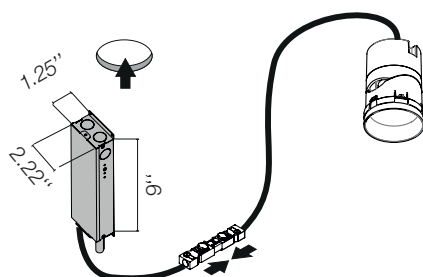
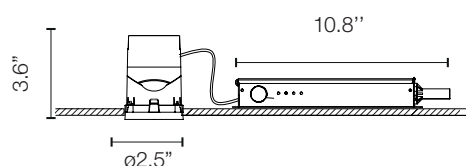
NON-IC Recessed Downlight Designed by Flos Architectural

### Description

The natural evolution of Light Shadow, now available in Pro versions. This high comfort downlight can be integrated in the space thanks to its reduced size and compact structure. Born to give high efficiency lighting with the highest standards of visual comfort when using the black patented reflectors. The dual focus lenses that the PRO family uses are developed by Flos to ensure the maximum control and give an exceptional even light beam. Light shadow PRO takes advantage of an innovative micro-textured silicone lens that allows extreme control without sacrificing the product efficiency. A total of 3 optics are available in this collection: Spot, Medium, Flood.



### Dimensions



### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Lamp

Lamp Type	LED
Wattage	8.8W
Initial Lumens	816 lm, 834 lm
Color Temperature	2700K, 3000K
Color rendering	90

### Optical

Beam Angle	16°/ 21°/ 31°
Lighting Type	Direct
Light Distribution	Symmetric

### Physical

Material	Aluminum
Aiming	Adjustable 30°
Weight	0.5 Pounds
Ingress Protection Rating	IP20

Finishes:

☐ White

☒ Black



Installation type	Ceiling Recessed - Non IC
Environment	Indoor
Minimum plenum height	10.5"

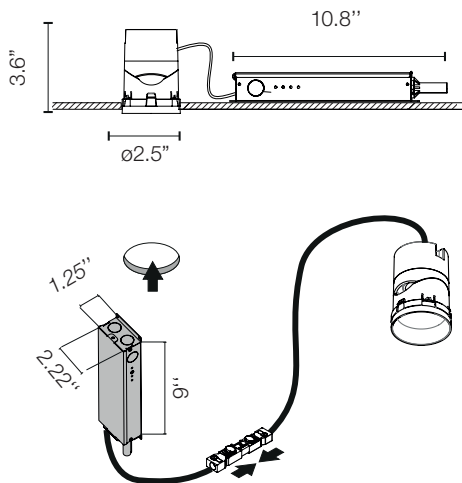


## Light Shadow PRO 60 Adjustable - Quick Ship

NON-IC Recessed Downlight Designed by Flos Architectural



### Dimensions



### Electrical & Control

Driver Location	Attached Splice Box
Driver Input Voltage	120V or 277V (depending on Selected Splice Box)
Control	0-10V
Current	700mA

### Performance

Delivered Lumens	663 lm, 678 lm, 752 lm
Efficacy	up to 85 lm/W

### Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Pre-Installation frame required. Depending on Installation requirements select Trim or Trimless Installation frames

Splice Box is installed from below.

Min 3" clearance from insulation.

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

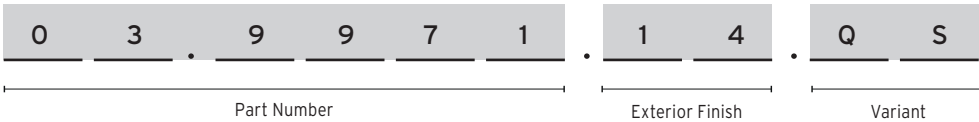
### Warranty

2 years from date of sale.

Light Shadow PRO 60 Adjustable - Quick Ship

NON-IC Recessed Downlight Designed by Flos Architectural

How to specify



Optic Spot (16°)



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	816	663	8.8	16°	03.9971	<div>14 Black</div> <div>40 White</div>	<p>Beam Angle: 16°            h(m) E(lx) D(m)            1 8749 0.28            2 2187 0.55            3 972 0.83            4 547 1.11            5 350 1.39            Luminous flux luminaire 722 lm</p>
3000	90	834	678	8.8		03.9976	<div>14 Black</div> <div>40 White</div>	<p>Beam Angle: 16°            h(m) E(lx) D(m)            1 9270 0.28            2 2317 0.55            3 1030 0.83            4 579 1.11            5 371 1.39            Luminous flux luminaire 765 lm</p>

Optic Medium (21°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	816	663	8.8	21°	03.9972	<div>14 Black</div> <div>40 White</div>	<p>Beam Angle: 21°            h(m) E(lx) D(m)            1 5856 0.37            2 1464 0.73            3 651 1.10            4 366 1.47            5 234 1.83            Luminous flux luminaire 728 lm</p>
3000	90	834	678	8.8		03.9977	<div>14 Black</div> <div>40 White</div>	<p>Beam Angle: 21°            h(m) E(lx) D(m)            1 6205 0.37            2 1552 0.73            3 689 1.10            4 388 1.47            5 248 1.83            Luminous flux luminaire 771 lm</p>

Light Shadow PRO 60 Adjustable - Quick Ship
NON-IC Recessed Downlight Designed by Flos Architectural

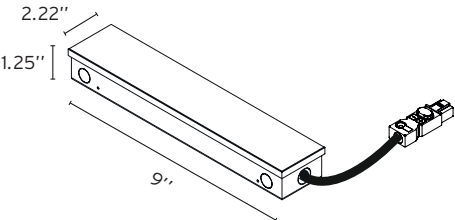
Optic Flood (31°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	816	663	8.8	31°	03.9973	14 Black 40 White	 <p>Beam Angle: 31° h(m) E(lx) D(m) 1 2638 0.56 2 659 1.11 3 293 1.67 4 165 2.23 5 106 2.79 Luminous flux luminaire 738 lm</p>
3000	90	834	678	8.8		03.9978	14 Black 40 White	 <p>Beam Angle: 31° h(m) E(lx) D(m) 1 2796 0.56 2 699 1.11 3 311 1.67 4 174 2.23 5 112 2.79 Luminous flux luminaire 782 lm</p>





Light Shadow PRO 60 Adjustable - Quick Ship

NON-IC Recessed Downlight Designed by Flos Architectural

Driver

Splice Box UL 120V 700mA 1-10V	
06.0319.00.90	
	

Required Accessories

Frame Trim Ø60. Adjustable Maximum Ceiling thickness 0.8"	Frame No Trim Ø60. Adjustable Maximum Ceiling thickness 1" CEILING TYPE: Drywall	
<div><input type="checkbox"/> 08.0164.40</div> <div><input checked="" type="checkbox"/> 08.0164.14</div>	08.0166.00	
		
		

Light Shadow PRO 60 Adjustable - Quick Ship

NON-IC Recessed Downlight Designed by Flos Architectural

Tray - Optional Accessories

Trimless registration tray -non electrical, place holder for non IC new construction, 14" x 10" Ø 4.75"	Trim registration tray -non electrical, place holder for non IC new construction, 14" x 10" Ø 2.95"
TRAY-0019	TRAY-0001

How to order Light Shadow PRO

