



## Light Shadow PRO 90 Fixed

NON-IC Recessed Downlight Designed by Flos Architectural

### Description

The natural evolution of Light Shadow, now available in Pro versions. This high comfort downlight can be integrated in the space thanks to its reduced size and compact structure. Born to give high efficiency lighting with the highest standards of visual comfort when using the black patented reflectors. The dual focus lenses that the PRO family uses are developed by Flos to ensure the maximum control and give an exceptional even light beam. Light shadow PRO takes advantage of an innovative micro-textured silicone lens that allows extreme control without sacrificing the product efficiency. A total of 5 optics are available in this collection: Super Spot, Spot, Medium, Flood, Wide Flood.

### Lamp

Lamp Type	LED
Wattage Super Spot	19W
Wattage (Optic S/M/F)	22W
Initial Lumens Super Spot	1867lm, 1593lm, 1752lm
Initial Lumens (Optic S/M/F/WF)	2324lm, 2419lm, 2520lm
Color Temperature	2700K, 3000K, 4000K *3500K (See Notes)
Color rendering	90

### Optical


Beam Angle	10°/14°/ 27°/ 39° /48°
Lighting Type	Direct
Light Distribution	Symmetric

### Physical



Material	Aluminum
Aiming	Fixed
Weight	0.5 Pounds
Ingress Protection Rating	IP54

Finishes:	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black <input type="checkbox"/> Steel <input type="checkbox"/> Bronze <input type="checkbox"/> Copper
	    

Installation type	Ceiling Recessed
Environment	Indoor
Maximum plenum height	11"

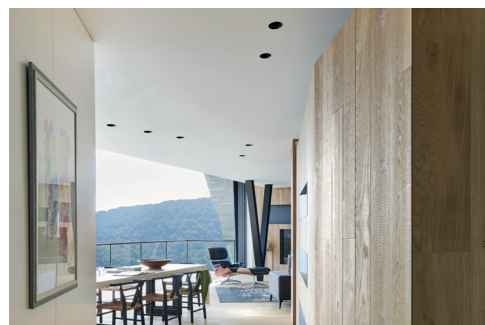

### Dimensions

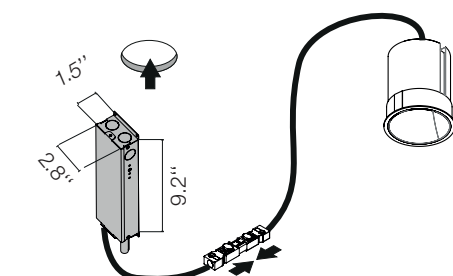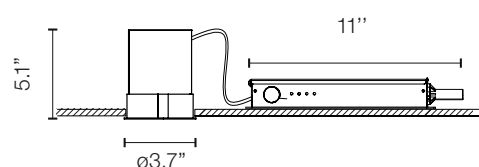

### Certifications



### Photometrics

For current IES files please visit [arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.





## Light Shadow PRO 90 Fixed

NON-IC Recessed Downlight Designed by Flos Architectural



### Dimensions

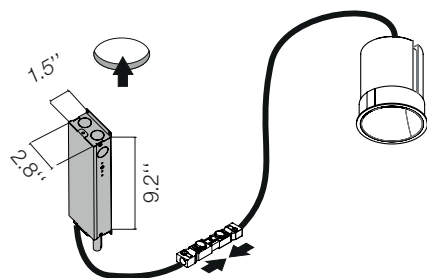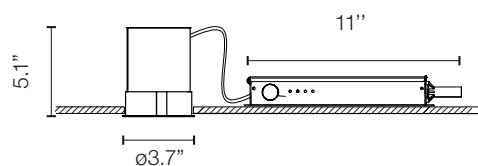

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Electrical & Control

Driver Location	Integral - In Splice Box
Driver Input Voltage	120V or 277V (depending on Selected Splice Box)
Control	0-10V, ELV
Current Super Spot	500mA
Current (Optic S/M/F/WF)	600mA
Vf	38

### Performance

Delivered Lumens Super Spot	1650lm, 1408lm, 1503lm
Delivered Lumens (Optic S/M/F/WF)	1793lm, 1914lm, 2011lm
Efficacy	91,4lm/W

### Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Pre-Installation frame required. Depending on Installation requirements select Trim or Trimless Installation frames


Splice Box is installed from below.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.




## Light Shadow PRO 90 Fixed

## NON-IC Recessed Downlight Designed by Flos Architectural

## How to specify

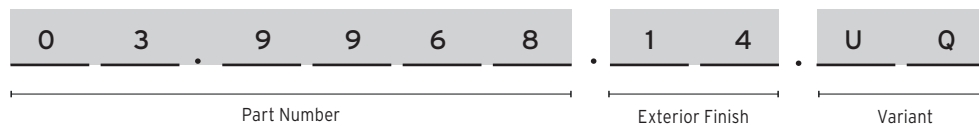

Optic Super Spot (14°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	1867	1650	19	10°	03.9968	<div><div>14 Black</div><div>40 White</div><div>ER Steel</div><div>ES Bronze</div><div>EQ Copper</div></div>	<div><div>Beam Angle: 10° h(m)E(lx)D(m) 1355930.17 288980.34 339550.51 422250.67 514240.84 Luminous flux luminaire 1300 lm</div></div>
3000	90	1593	1408	19		03.9969	<div><div>14 Black</div><div>40 White</div><div>ER Steel</div><div>ES Bronze</div><div>EQ Copper</div></div>	<div><div>Beam Angle: 10° h(m)E(lx)D(m) 1374790.17 293700.34 341640.51 423420.67 514990.84 Luminous flux luminaire 1368 lm</div></div>
4000	90	1752	1503	19		03.9924	<div><div>14 Black</div><div>40 White</div><div>ER Steel</div><div>ES Bronze</div><div>EQ Copper</div></div>	<div><div>Beam Angle: 10° h(m)E(lx)D(m) 1408310.17 2102080.34 345370.51 425520.67 516330.84 Luminous flux luminaire 1491 lm</div></div>

Optic Spot (14°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	1035	1786	22	14°	03.9960	<div><div>■</div>14 Black</div> <div><div>□</div>40 White</div> <div><div>▒</div>ER Steel</div> <div><div>■</div>ES Bronze</div> <div><div>■</div>EQ Copper</div>	<div><p>Beam Angle: 14° h(m) E(lx) D(m) 1 24449 0.25 2 6112 0.50 3 2717 0.75 4 1528 1.00 5 978 1.25 Luminous flux luminaire 1786 lm</p></div>
3000	90	1115	1906	22		03.9964	<div><div>■</div>14 Black</div> <div><div>□</div>40 White</div> <div><div>▒</div>ER Steel</div> <div><div>■</div>ES Bronze</div> <div><div>■</div>EQ Copper</div>	<div><p>Beam Angle: 14° h(m) E(lx) D(m) 1 26098 0.25 2 6524 0.50 3 2900 0.75 4 1631 1.00 5 1044 1.25 Luminous flux luminaire 1906 lm</p></div>
4000	90	1185	2003	22		03.9920	<div><div>■</div>14 Black</div> <div><div>□</div>40 White</div> <div><div>▒</div>ER Steel</div> <div><div>■</div>ES Bronze</div> <div><div>■</div>EQ Copper</div>	<div><p>Beam Angle: 14° h(m) E(lx) D(m) 1 27421 0.25 2 6855 0.50 3 3047 0.75 4 1714 1.00 5 1097 1.25 Luminous flux luminaire 2003 lm</p></div>

Light Shadow PRO 90 Fixed

NON-IC Recessed Downlight Designed by Flos Architectural

Optic Medium (27°)




CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	1035	1814	22	27°	03.9961	14 Black 40 White ER Steel ES Bronze EQ Copper	<p>Beam Angle: 27° h(m) E(lx) D(m) 1 9219 0.48 2 2305 0.95 3 1024 1.43 4 576 1.90 5 369 2.38 Luminous flux luminaire 1814 lm</p>
3000	90	1115	1936	22		03.9965	14 Black 40 White ER Steel ES Bronze EQ Copper	<p>Beam Angle: 27° h(m) E(lx) D(m) 1 9840 0.48 2 2460 0.95 3 1093 1.43 4 615 1.90 5 394 2.38 Luminous flux luminaire 1936 lm</p>
4000	90	1185	2034	22		03.9921	14 Black 40 White ER Steel ES Bronze EQ Copper	<p>Beam Angle: 27° h(m) E(lx) D(m) 1 10339 0.48 2 2585 0.95 3 1149 1.43 4 646 1.90 5 414 2.38 Luminous flux luminaire 2034 lm</p>

Optic Flood (39°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	1035	1760	22	39°	03.9962	14 Black 40 White ER Steel ES Bronze EQ Copper	<p>Beam Angle: 39° h(m) E(lx) D(m) 1 4809 0.71 2 1202 1.42 3 534 2.13 4 301 2.85 5 192 3.56 Luminous flux luminaire 1760 lm</p>
3000	90	1115	1878	22		03.9966	14 Black 40 White ER Steel ES Bronze EQ Copper	<p>Beam Angle: 39° h(m) E(lx) D(m) 1 5133 0.71 2 1283 1.42 3 570 2.13 4 321 2.85 5 205 3.56 Luminous flux luminaire 1878 lm</p>
4000	90	1185	1974	22		03.9922	14 Black 40 White ER Steel ES Bronze EQ Copper	<p>Beam Angle: 39° h(m) E(lx) D(m) 1 5393 0.71 2 1348 1.42 3 599 2.13 4 337 2.85 5 216 3.56 Luminous flux luminaire 1974 lm</p>

Light Shadow PRO 90 Fixed
NON-IC Recessed Downlight Designed by Flos Architectural





Optic Wide Flood (48°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	1035	1872	22	48°	03.9963	<div><div></div>14 Black</div> <div><div></div>40 White</div> <div><div></div>ER Steel</div> <div><div></div>ES Bronze</div> <div><div></div>EQ Copper</div>	<div><div>Beam Angle: 48° h(m) E(fx) D(m) 1 3084 0.89 2 771 1.79 3 343 2.68 4 193 3.58 5 123 4.47 3084 cd Luminous flux luminaire 1872 lm</div></div>
3000	90	1115	1999	22		03.9967	<div><div></div>14 Black</div> <div><div></div>40 White</div> <div><div></div>ER Steel</div> <div><div></div>ES Bronze</div> <div><div></div>EQ Copper</div>	<div><div>Beam Angle: 48° h(m) E(fx) D(m) 1 3293 0.89 2 823 1.79 3 366 2.68 4 206 3.58 5 132 4.47 3293 cd Luminous flux luminaire 1999 lm</div></div>
4000	90	1185	2100	22		03.9923	<div><div></div>14 Black</div> <div><div></div>40 White</div> <div><div></div>ER Steel</div> <div><div></div>ES Bronze</div> <div><div></div>EQ Copper</div>	<div><div>Beam Angle: 48° h(m) E(fx) D(m) 1 3459 0.89 2 865 1.79 3 384 2.68 4 216 3.58 5 138 4.47 3459 cd Luminous flux luminaire 2100 lm</div></div>




Light Shadow PRO 90 Fixed

NON-IC Recessed Downlight Designed by Flos Architectural

Required Accessories

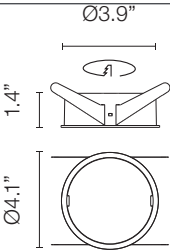Frame Trim Ø90. Maximum Ceiling thickness 1"	Frame Trimless Ø90. Maximum Ceiling thickness 1" CEILING TYPE: Drywall	
<div><div></div> 08.0161.40 <div></div> 08.0161.14</div>	08.0193.00	
		
		

Required Drivers

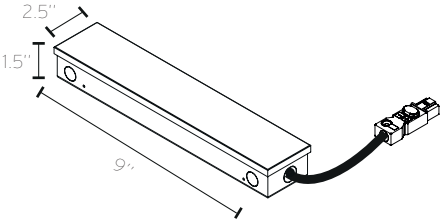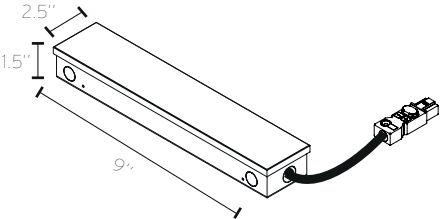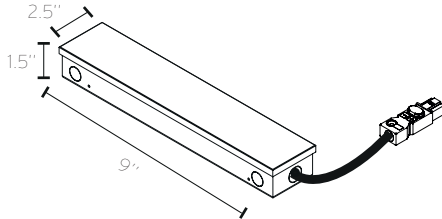Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 120V	Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 277V	Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 30W, ELV Dimmable, Thermal 120V
SP40W600MA-120-A01	SP40W600MA-277-A01	SP30W600MA-ELV-U02
		

Light Shadow PRO 90 Fixed

NON-IC Recessed Downlight Designed by Flos Architectural

Tray - Optional Accessories

Trimless registration tray -non electrical, place holder for non IC new construction, 14" x 10" Ø 4.75"	Trim registration tray -non electrical, place holder for non IC new construction, 14" x 10" Ø 4"
TRAY-0019	TRAY-0016

How to order Light Shadow PRO

