


The Running Magnet 2.0 Surface

High-tech LED lighting system for interior architecture.

Mini Glo-ball

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

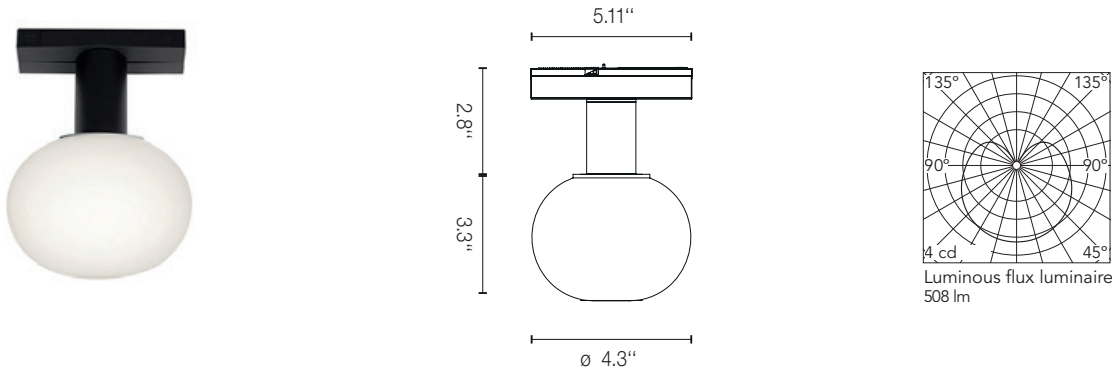

How to Specify ex. 03.6260.30B90



| | CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Part Number | Finish | Dimming Protocol |
|-----------------|-------|-----|----------------|------------------|-------|-------------|--------------|---------------------------|
| Mini Glo - Ball | 3000K | 80 | 880lm | 528lm | 7W | 03.6261 | ■ 14 = Black | B90 = Dimmable on board |
| | 2700K | 80 | 800lm | 488lm | 7W | 03.6260 | | .DD = DALI .9V = 0-10V |

The Running Magnet 2.0 Surface

High-tech LED lighting system for interior architecture.

Mini Glo - Ball Suspension

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

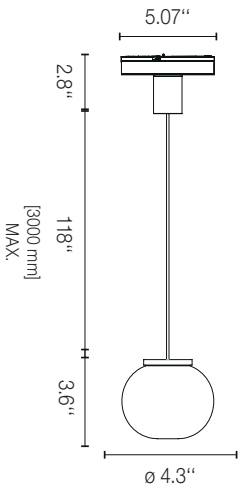

How to Specify ex. 03.6263.30B90

| | CCT | CRI | Initial Lumens | Delivered Lumens | Watts | Part Number | Finish | Dimming Protocol |
|----------------------------|-------|-----|----------------|------------------|-------|-------------|--------------|---------------------------|
| Mini Glo - Ball Suspension | 3000K | 80 | 440lm | 271lm | 3.5W | 03.6263 | ■ 14 = Black | B90 = Dimmable on board |
| | 2700K | 80 | 400lm | 259lm | 3.5W | 03.6262 | | ADD = DALI .9V = 0-10V |