



## Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

### Description

Fun with magnets and light. Simultaneously graphic and subtle, the Running Magnet is flexible, precise, and as creative as you. It is track lighting redesigned and elegantly refined. Light elements snap in place and connect automatically through the magic of magnets. Extruded aluminum housings create a clean 1-3/8-inch slot and preconfigured corners complete the system that can run up, around and across walls and ceilings. Finishes align perfectly, always, because Running Magnet can be easily cut on site (except Suspension Up&Down). Linear LED and accent fixtures, available in a variety of sizes, can be exchanged and repositioned quickly, without tools, with artistic results. The Running Magnet is perfect for retail displays where frequent changes are typical and absolute performance is mandatory.

### Lamp

System Lamp Type	LED
Color Temperature	2700K, 3000K, 3500K*, 4000K (*See Notes)
Color Rendering	CRI90
Application	General Lighting / Accent lighting


### Physical

Material	Aluminum
Ingress Protection Rating	IP20
Finishes	■ 14 Black □ 40 = White
Installation type	Suspended
Environment	Indoor
Field cuttable	No

### Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Driver Output Voltage	24V
Maximum Driver Wattage	Class 2 - 96W
Control	On fixture: Standard 0-10V dimming / DALI / On board

### Suspended Installation



### Light Modules



### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.



## Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

### Notes

EC to supply site cabling from driver to track location and site UL listed enclosure.

Wattage per linear foot is dependent upon quantity and type of light modules used.

Spots and linear luminaires available with individually addressable DALI-Wireless circuitry, 0-10V (from 10% up to 100%) Dimming


All components required for the installation are included with the system with the exception of drivers and controllers

Linear profiles available as feed profiles to connect to a driver and intermediate profiles to fill in remaining lengths.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.



### Suspended Installation



Up&Down profiles are not cuttable. Linear profiles available as feed profiles to connect to a driver and intermediate profiles to fill in remaining lengths.

Track can not be powered through corners. The corners are not fitted with indirect illumination.

13' of suspension aircraft cable is standard

### Light Modules



### How To Specify

#### A. Select and position corners

1. Horizontal - Connect sections on flat surfaces (90° corner)

#### C. Drivers

Quantity of drivers determined by total wattage or light elements in section (approximately one every 10 feet). Maximum driver distance is 15'. Locate drivers nearby. Dimming hardwires into profile, bypasses driver.

#### B. Fill lengths between corners with Linear Housings

3.3', 4.9', 6.6' or 8.2' sections can be specified as feed or intermediate profiles. Profile can be easily cut to site to exact length and joined together.

#### D. Select Spot heads

Linear strips are available in five nominal lengths: 1', 2', 3', 4' and 5'. Individual units can be adjusted from 20-100% with a built-in dimming knob and DALI and 0-10V from 10-100%

### Certifications




### Photometrics

For current IES files please visit [arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

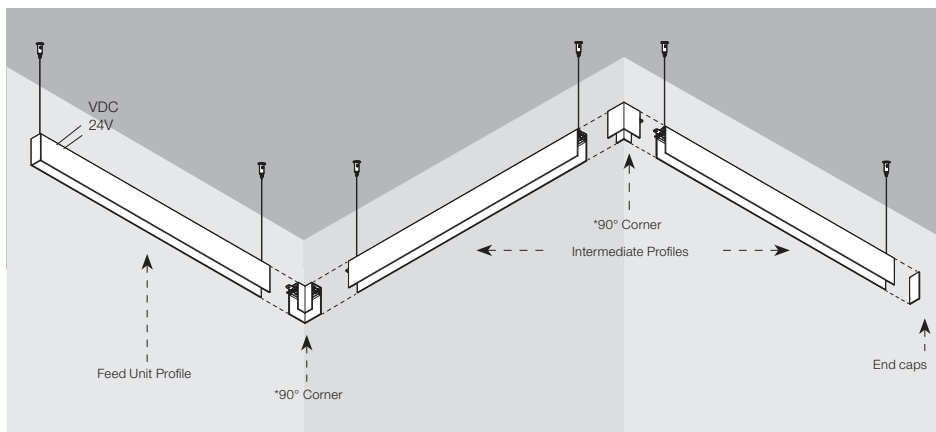


## Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

### Profile

The extruded aluminum housing creates a clean 1-3/8" slot that can be run across the ceilings. Horizontal corners complete the system. The magnetic luminaries are simply installed by insertion. Linear tracks are available in two versions: power feed profiles for connecting to a driver, and intermediate profiles. End caps and connection cables are included with each power feed profile. Internal foam for opening support should not be removed until after installation.

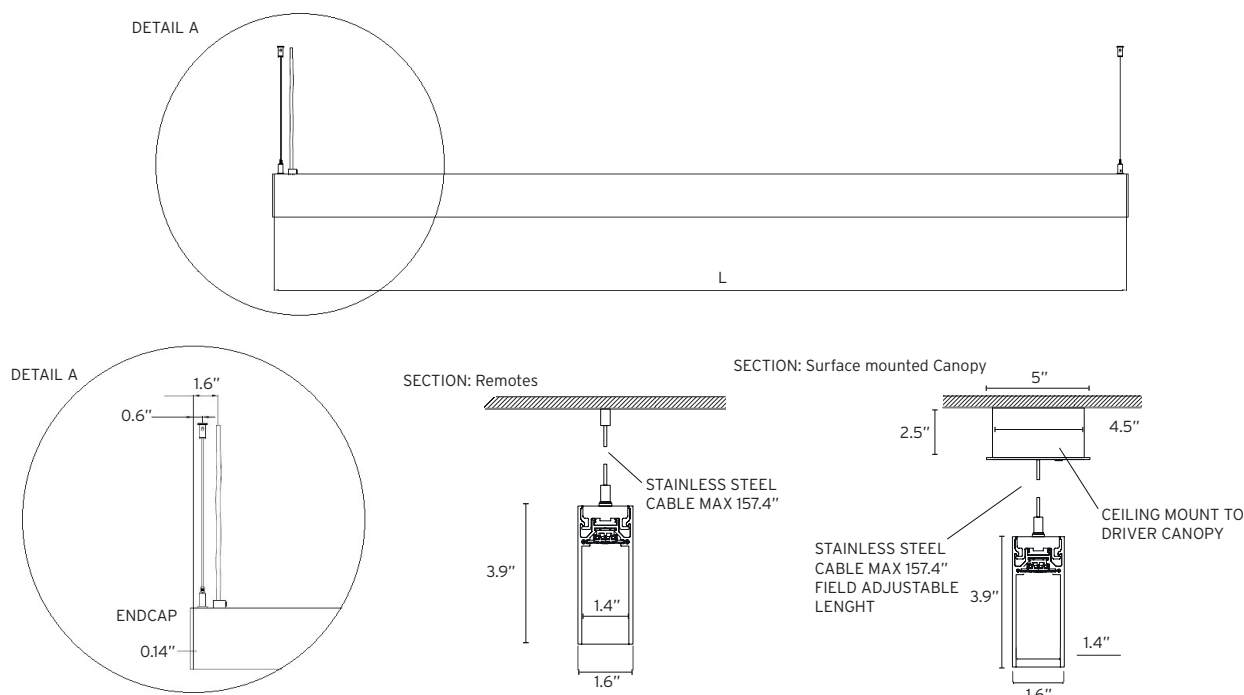

### Feed Profile

#### How to Specify

ex. 06.1614.14A90

Length	CCT	CRI	Initial Lumens Up	Delivered Lumens Up	Watts	Part Number	Finish	Photometrics	Variant
39.4" (1m)	3000K	90	950lm	520lm	8.4W	06.1614	<div> <div>14 = Black</div> <div>40 = White</div> </div>		A90 = UL Version
59" (1.5m)	3000K	90	1425lm	1266lm	12.6W	06.1615			
78.7" (2m)	3000K	90	1900lm	1688lm	16.8W	06.1616			
98.4" (2.5m)	3000K	90	2375lm	2109lm	21W	06.1617			

### Intermediate Profile

#### How to Specify

ex. 06.1619.14A90

Length	CCT	CRI	Initial Lumens Up	Delivered Lumens Up	Watts	Part Number	Finish	Photometrics	Variant
39.4" (1m)	3000K	90	950lm	944lm	8.4W	06.1619	<div> <div>14 = Black</div> <div>40 = White</div> </div>		A90 = UL Version
59" (1.5m)	3000K	90	1425lm	1266lm	12.6W	06.1620			
78.7" (2m)	3000K	90	1900lm	1688lm	16.8W	06.1621			
98.4" (2.5m)	3000K	90	2375lm	2019lm	21W	06.1622			

Running Magnet 2.0 Suspension Up&Down


High-tech LED lighting system for interior architecture.

Corners

90° Corner. [5.9" x 5.9"]  
Power can continue through corner.  
Power cannot be fed from corner.  
Includes 1 cable suspension kit.

Part Number:






- 06.1624.14
- 06.1624.40



Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.


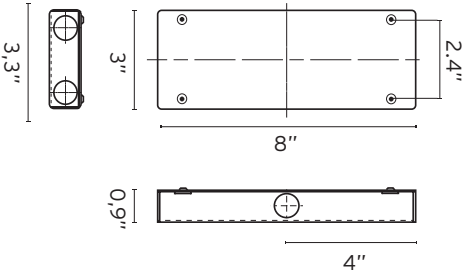

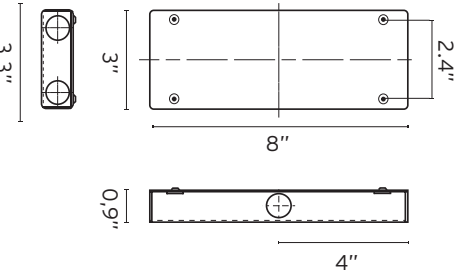

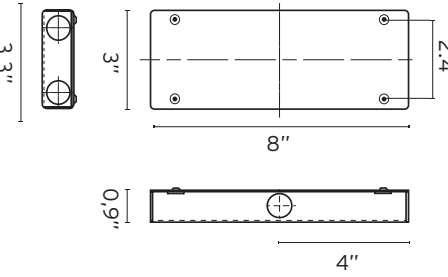

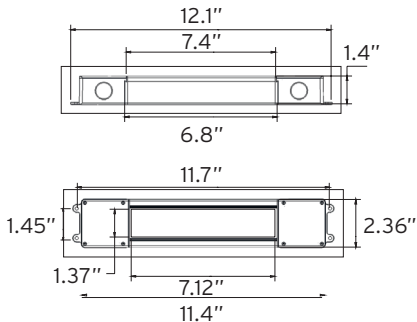

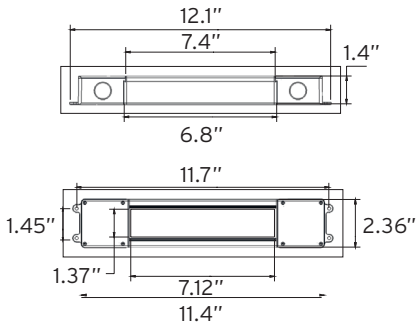

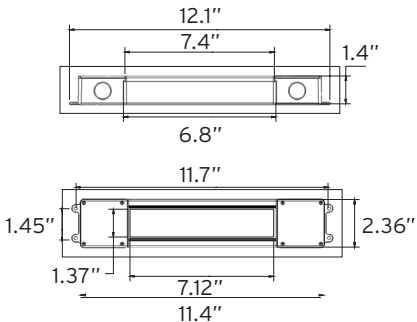
Accessories
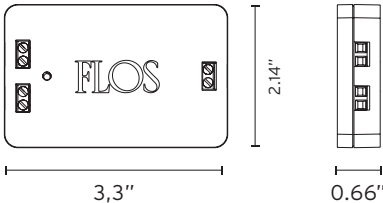
<p>End Cap kit ( 2 units) Includes the End Feed connector</p>	<p>Dimming Control Unit Box 24V 0-10V Required for a 0-10V Dimming installation. 1 DCU can control up to 25 fixtures</p>	<p>Cover Plate. 4" Junction Box Cover Plate for Remote Installation.</p>
<p>Part Number:</p> <p><input checked="" type="checkbox"/> 08.8887.14 <input type="checkbox"/> 08.8887.40</p>	<p>Part Number:</p> <p><input checked="" type="checkbox"/> 08.0613.14A</p>	<p>Part Number:</p> <p><input checked="" type="checkbox"/> RM -C -B (Black) <input type="checkbox"/> RM -C -W (White)</p>
	 	 

## Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.





### Required Drivers

<p>LED power supply source for remote installation, 24V/96W, 120-277V, UL Listed</p> <p><b>Part Number:</b></p> <p><b>LEDSB96W24V-NDM-U01</b></p>  	<p>LED power supply source for remote installation, 24V/60W, 120-277V, UL Listed</p> <p><b>Part Number:</b></p> <p><b>LEDSB60W24V-NDM-U01</b></p>  	<p>LED power supply source for remote installation, 24V/40W, 120-277V, UL Listed. (Consult for DALI version)</p> <p><b>Part Number:</b></p> <p><b>LEDSB40W24V-NDM-U01</b></p>  
<p>LED power supply source for remote installation, 24V/96W, 120-277V, UL Listed</p> <p><b>Part Number:</b></p> <p><b>LEDSB96W24V-NDM-D01</b></p>  	<p>LED power supply source for remote installation, 24V/60W, 120-277V, UL Listed</p> <p><b>Part Number:</b></p> <p><b>LEDSB60W24V-NDM-D01</b></p>  	<p>LED power supply source for remote installation, 24V/30W, 120-277V, UL Listed</p> <p><b>Part Number:</b></p> <p><b>LEDSB30W24V-NDM-D01</b></p>  


Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Surface Mounted Canopies

Surface mount canopy Non Dimmable for Running Magnet Suspension Up&Down includes: 2 drivers: 96W, 24V, 120-277VAC	Surface mount canopy Dimmable for Running Magnet Suspension Up&Down includes: 2 drivers: 96W, 24V, 120-277VAC 1 Dimming Control Unit Box: 08.0613.14A
Part Number: <div><div>■</div> 08U0004.14</div> <div><div>□</div> 08U0004.30</div>	Part Number: <div><div>■</div> 08U0004.14A1V</div> <div><div>□</div> 08U0004.30A1V</div>
	
	

How to specify

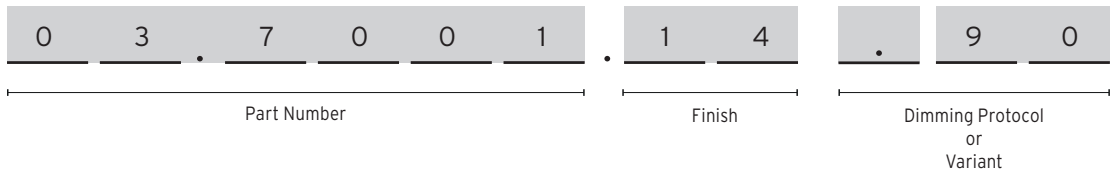



Running Magnet 2.0 Suspension Up&Down


High-tech LED lighting system for interior architecture.

Light Strip Module HE


Linear High Efficiency LED can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture from 20-100%, DALI and 0-10V from 10-100%. Clear end caps included for continuous look when installing end-to-end.






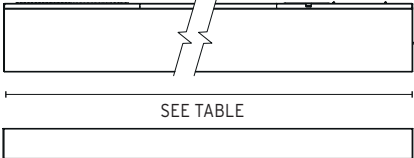


SEE TABLE






Luminous flux luminaire  
440 lm

Beam Angle: 105°		
h(m)	E(lx)	D(m)
1	158	2.76
2	39	5.52
3	18	8.28
4	10	11.04
5	6	13.81

How to Specify		ex. 03.7001.14.90							
Light Strip Length	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
11.8" (300mm)	3000K	90	460lm	440lm	7.5W	105°	03.7001	 14 = Black	.90 = Dimmable on board .DD = DALI .9V = 0-10V
23.6" (600mm)	3000K	90	920lm	880lm	15W	105°	03.7003		
35.4" (900mm)	3000K	90	1380lm	1320lm	22.5W	105°	03.7005		
47.2" (1200mm)	3000K	90	1840lm	1760lm	30W	105°	03.7007		

How to Specify		ex. 03.7000.14.90							
Light Strip Length	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
11.8" (300mm)	2700K	90	435lm	425lm	7.5W	105°	03.7000	 14 = Black	.90 = Dimmable on board .DD = DALI .9V = 0-10V
23.6" (600mm)	2700K	90	870lm	833lm	15W	105°	03.7002		
35.4" (900mm)	2700K	90	1305lm	1249lm	22.5W	105°	03.7004		
47.2" (1200mm)	2700K	90	1740lm	1665lm	30W	105°	03.7006		



Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Spot Module

Accent LED Spot modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture DALI from 1-100% and 0-10V from 10-100%. Standard beam spread is 14°. Additional interchangeable lenses available in 23° and 33°, and 10° x 40° elliptical beam spread.

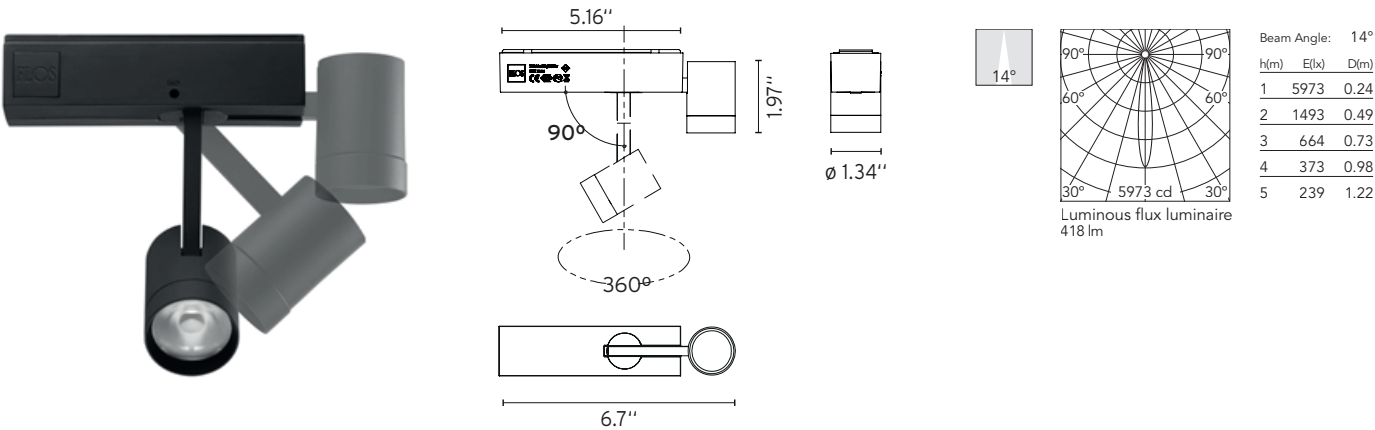


Table with 9 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Beam Spread, Part Number, Finish, Dimming Protocol. It lists specifications for three different CCT options (2700K, 3000K, 4000K) and their corresponding lumens, wattage, and part numbers.

Optional Accessories


Table with 4 columns: Flood Lens Accessory 23° Field Changeable, Wide Flood Lens Accessory 33° Field Changeable, Elliptical Lens Accessory Field Changeable 10° x 40°, Extra long snoot for added shielding in aluminum with black finish (does not protude from channel when tucked up into housing). Each column includes a part number and a corresponding image of the accessory.

Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.




Multi Spot 4

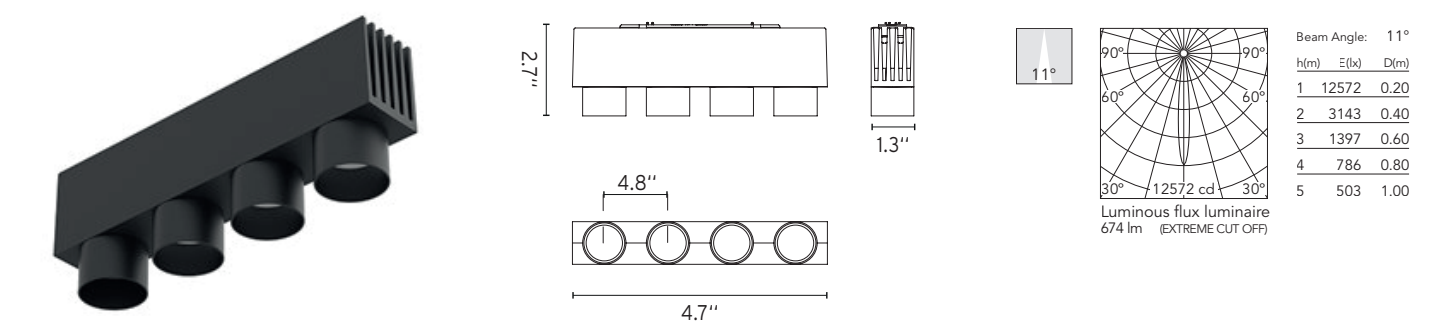4 accent Spot LED module can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture (from 20-100%), DALI and 0-10V (from 10-100%). Standard beam spread is 11° additional interchangeable lenses available in 20° and 30°, and elliptical beam spread.



How to Specify ex. 03.6306.14.90								
CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
3000K	90	4 X 210lm	674lm	10W	11°	03.6306	■ 14 = Black	.90 = Dimmable on board
2700K	90	4 X 210lm	630lm	10W	11°	03.6305		.DD = DALI .9V = 0-10V

Optional Accessories


Flood Lens Accessory 20° Field Changeable	Wide Flood Lens Accessory 30° Field Changeable	Elliptical Lens Accessory Field Changeable 10° x 40°
Part Number: 08.8760.00	Part Number: 08.8761.00	Part Number: 08.8759.00
		

Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Spot 120

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.

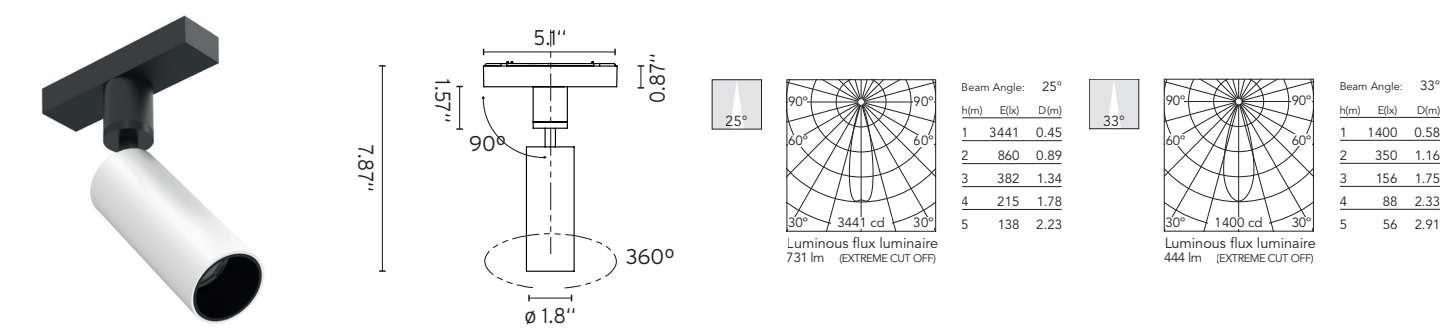

How to Specify ex. 03.6285.14.90

CCT	CRI	Initial Lumens	Delivered Lumens	Watts*	Beam Spread	Part Number	Finish	Part Number 0-10V Dimming
2700K	90	985lm	706lm	12.5W	25°	03.6285	<div>■ 14 = Black</div> <div>□ 40 = White</div>	.C90 = Dimmable on board (12.5W)
3000K	90	1060lm	731lm			03.6284		
2700K	90	985lm	430lm	12.5W	33°	03.6286		
3000K	90	1060lm	444lm			03.6287		

CCT	CRI	Initial Lumens	Delivered Lumens	Watts*	Beam Spread	Part Number	Finish	Part Number 0-10V Dimming
2700K	90	985lm	706lm	14W	25°	03.6285	<div>■ 14 = Black</div> <div>□ 40 = White</div>	.C9V = 0-10V (14W) .CDD = DALI (14W)
3000K	90	1060lm	731lm			03.6284		
2700K	90	985lm	430lm	14W	33°	03.6286		
3000K	90	1060lm	444lm			03.6287		


\* Dimmable on board 12.5W, DALI and 0-10V Dimming fixtures are 14W

Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Light Shadow

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.

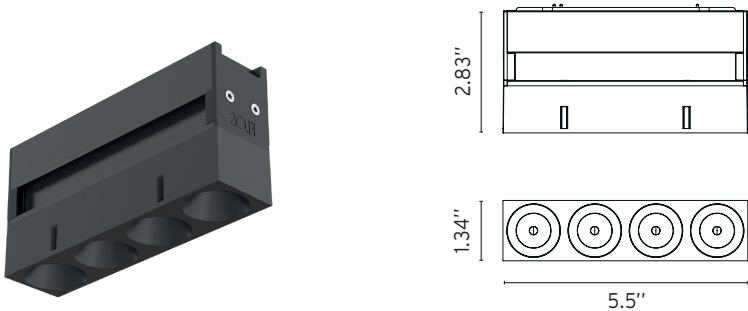

How to Specify ex. 03.8949.14A90

CCT	CRI	Initial Lumens*	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Dimming Protocol
2700K	90	4x270 lm	10.8W	10°	03.8949	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	A90 = Dimmable on board ADD = DALI A9V = 0-10V
					03.8948		White	
					05.1800		Copper	
					05.1801		Steel	
					05.1802		Bronze	
3000K	90	4x285 lm	10.8W	10°	03.8953	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	A90 = Dimmable on board ADD = DALI A9V = 0-10V
					03.8952		White	
					05.1805		Copper	
					05.1806		Steel	
					05.1807		Bronze	
2700K	90	4x270 lm	10.8W	23°	03.9621	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	A90 = Dimmable on board ADD = DALI A9V = 0-10V
					03.9620		White	
					05.1810		Copper	
					05.1811		Steel	
					05.1812		Bronze	
3000K	90	4x285 lm	10.8W	23°	03.9631	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	A90 = Dimmable on board ADD = DALI A9V = 0-10V
					03.9630		White	
					05.1815		Copper	
					05.1816		Steel	
					05.1817		Bronze	

\* Delivered Lumens From 735lm to 859lm varies depending on the reflector finish, beam angle and CCT

## Running Magnet 2.0 Suspension Up&Down


High-tech LED lighting system for interior architecture.

How to Specify ex. 03.8949.14A90

CCT	CRI	Initial Lumens*	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Dimming Protocol
2700K	90	4x270 lm	10.8W	33°	03.9626	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	<div> <div>A90 = Dimmable on board</div> <div>ADD = DALI</div> <div>A9V = 0-10V</div> </div>
					03.9625		White	
					05.1820		Copper	
					05.1821		Steel	
					05.1822		Bronze	
3000K	90	4x285 lm	10.8W	33°	03.9636	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	
					03.9635		White	
					05.1825		Copper	
					05.1826		Steel	
					05.1827		Bronze	
2700K	90	4x270 lm	10.8W	47°	03.9661	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	
					03.9660		White	
					05.1830		Copper	
					05.1831		Steel	
					05.1832		Bronze	
3000K	90	4x285 lm	10.8W	47°	03.9665	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	
					03.9664		White	
					05.1835		Copper	
					05.1836		Steel	
					05.1837		Bronze	

\* Delivered Lumens From 735 lm to 859 lm varies depending on the reflector finish, beam angle and CCT

## Photometrics 3000K


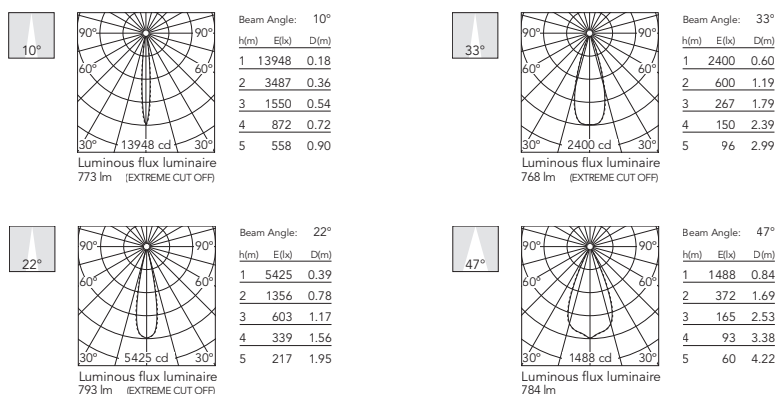


Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Light Shadow Wall-Washer

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.



Beam Angle: 46°



h(m)	E lx	D(m)
1	967	0.48
2	242	0.97
3	107	1.45
4	60	1.94
5	39	2.42

Luminous flux luminaire 730 lm

How to Specify ex. 03.9905.14A90

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Dimming Protocol
2700K	90	4x270 lm	654 lm	10.8W	46°	03.9905	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	A90 = Dimmable on board ADD = DALI A9V = 0-10V
3000K	90	4x285 lm	730 lm	10.8W	46°	03.9904	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	

How To Install

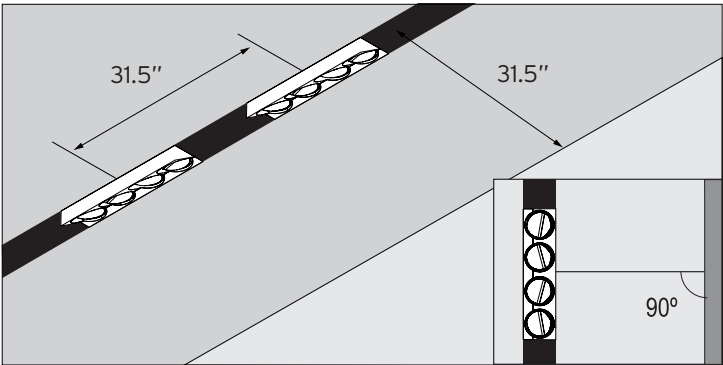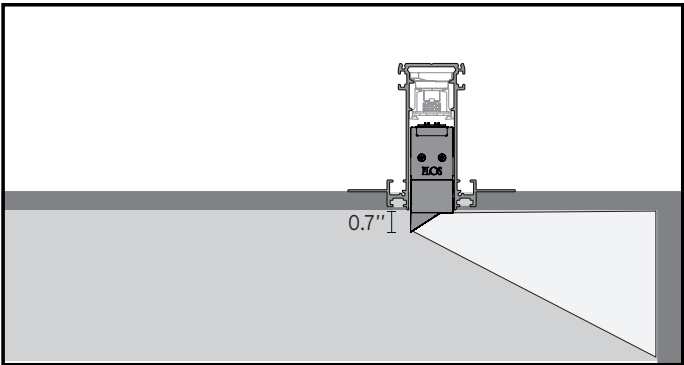


Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Mini Glo-ball

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

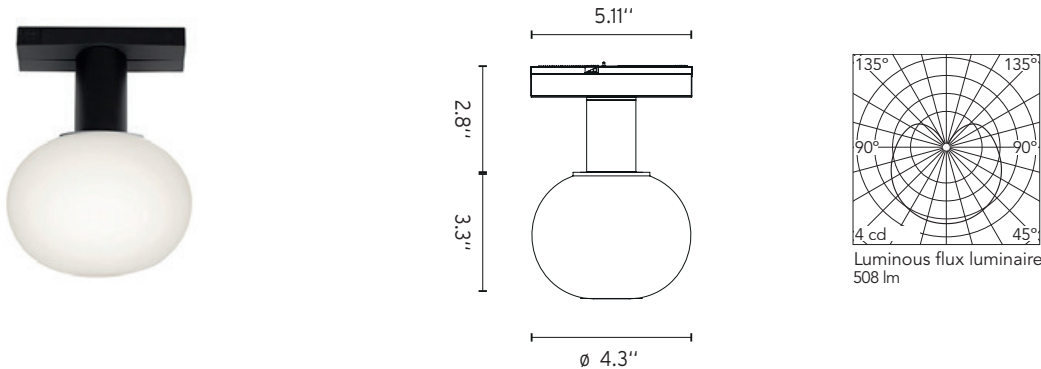



How to Specify		ex. 03.6260.30B90							
	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol	
Mini Glo - Ball	3000K	80	880lm	528lm	7W	03.6261	■ 14 = Black	B90 = Dimmable on board	
	2700K	80	800lm	488lm	7W	03.6260		.DD = DALI	
								.9V = 0-10V	

Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Mini Glo - Ball Suspension

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

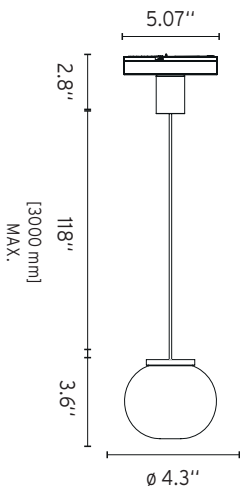

How to Specify ex. 03.6263.30B90

	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
Mini Glo - Ball Suspension	3000K	80	440lm	271lm	3.5W	03.6263	■ 14 = Black	B90 = Dimmable on board
	2700K	80	400lm	259lm	3.5W	03.6262		.DD = DALI .9V = 0-10V





Running Magnet 2.0 Suspension Up&Down

High-tech LED lighting system for interior architecture.

Find Me Suspension

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

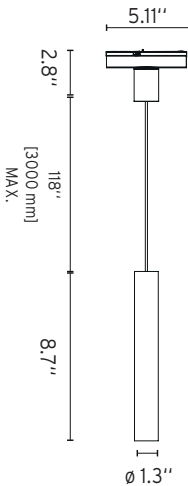

Beam Angle:		14°
h(m)	E(lx)	D(m)
1	4881	0.24
2	1220	0.49
3	542	0.73
4	305	0.97
5	195	1.21

How to Specify ex. 03.6273.30C90

	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
Find Me Suspension	3000K	90	600lm	365lm	8W	14°	03.6273	<div><div></div> 30 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 06 = Chrome</div>	C90 = Dimmable on board .DD = DALI .9V = 0-10V
	2700K	90	560lm	344lm	8W	14°	03.6272		