



## EasyKap 80 (ø3.2") Round Wall-Washer NON-IC

NON-IC Ceiling Recessed Trim Downlight

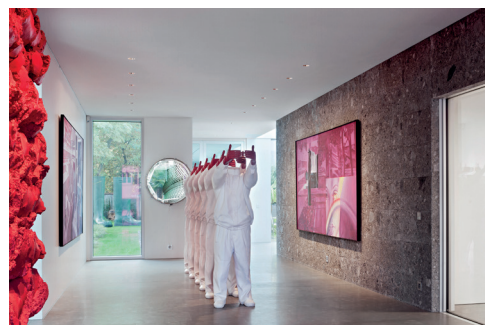

### Dimensions

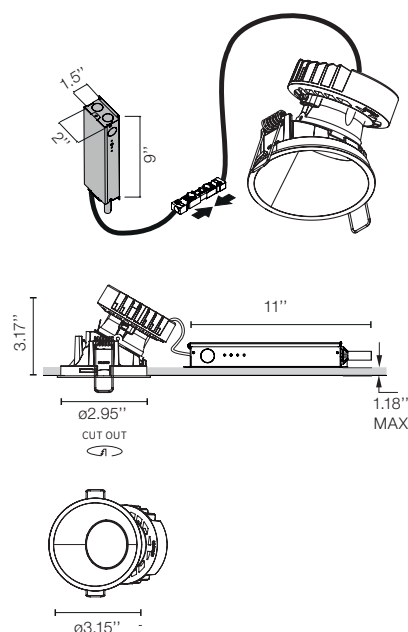

### Description

LED luminaire for recessed mounting into plasterboard ceilings. The Easy Kap version has an aluminium injected body with a liquid paint, dust and/or metallic copper finish with a plastic diffuser included. It does not need a pre-installation frame. Thanks to remote-phosphor technology, the LED modules of the Phosphor LED version offer maximum quality light, the perception of objects and spaces, reaching chromatic reproduction indices of 90. The LED modules installed on the LED Array versions have cutting-edge technology that permits a lower average temperature in the electronics. Thanks to this feature, the luminaire can operate at a higher power inside the safety parameters yet still offer 20% added luminous flux.

### Lamp

Lamps Type LED ARRAY

Wattage 9.2W

Output Nominal 935lm, 974lm

Color Temperature 2700K, 3000K

Color rendering CRI 90

### Optical

Beam Angle 28°

Lighting Type Direct

Light Distribution Symmetric

### Physical

Material Aluminum

Aiming Wall Washer

Weight 7.77 Lbs

Ingress Protection Rating IP54

Finishes Painted lacquer

☐ B1 White

☒ 74 Black

☐ GL Matt Gold



### Certifications



### Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.

FLOS. USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011

Installation type

Ceiling Recessed Non IC, 11" recommended ceiling space to install

Environment

Indoor dry location

## EasyKap 80 (ø3.2") Round Wall-Washer NON-IC

NON-IC Ceiling Recessed Trim Downlight




### Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Driver in splice box
Current	500mA

### Performance

Delivered lumens	from 540 lm up to 654lm
Efficacy	71 lm/W

### Dimensions

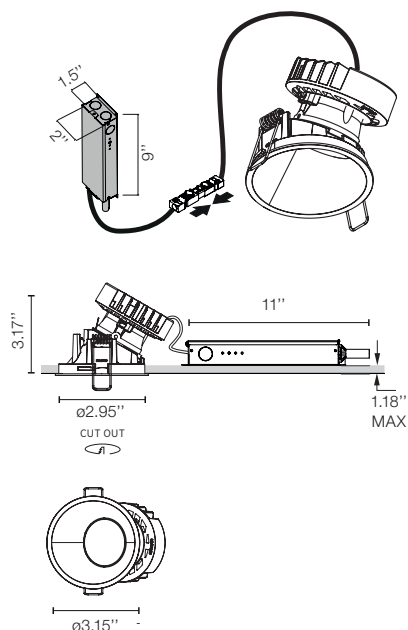

### Notes

Pre-installation frame has to be ordered separately

Non IC rated luminaire

Ceiling Recessed Non IC, 11" recommended ceiling space to install

Driver must be ordered separately. 3 Options:

- 0-10V Dimming 120V
- 0-10v Dimming 277 V
- ELV Dimming 120 V

Available in 4 different finishes: Black, White, Gold and Copper.

Maximum tilt angle for the Kap 80 (3.2") adjustable version is 20°

LED included not replaceable

Listings: UL listed, IP44

### Certifications



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty


2 years from date of sale.

FLOS. USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011

EasyKap 80 (ø3.2'') Round Wall-Washer NON-IC

NON-IC Ceiling Recessed Trim Downlight


How to specify

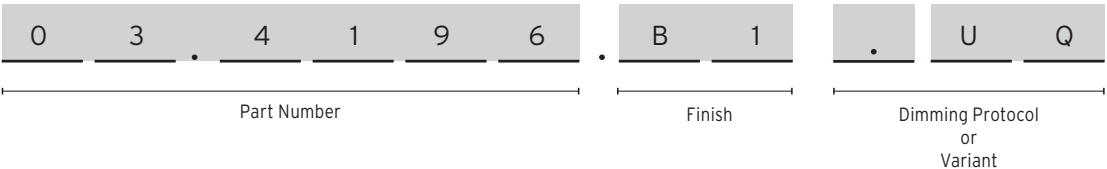

How to Specify                      ex. 03.4196.B1.UQ

Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
03.4196	3000	90	974	9,2W	28°	<div><input type="checkbox"/> B1 = White</div> <div><input checked="" type="checkbox"/> 74 = Black</div> <div><input type="checkbox"/> GL = Gold</div>	UQ = US product. Splice Box* not included  *Has to be Always supply by FLOS
03.4197	2700	90	935				

Photometries

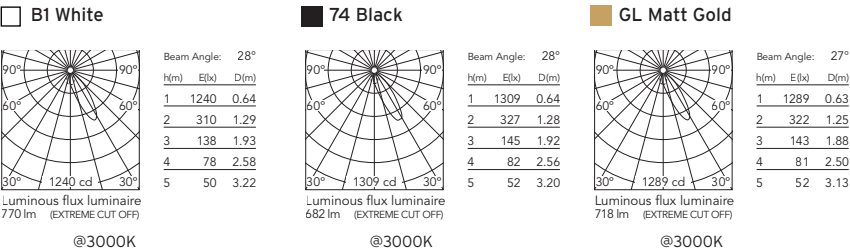


EasyKap 80 (ø3.2'') Round Wall-Washer NON-IC

NON-IC Ceiling Recessed Trim Downlight

Required Splice Box


Splice Box 14W, 20% dim, ELV, 120V. Size: 9'' x 2'' x 1.5''

SP14W500MA-ELV-E01

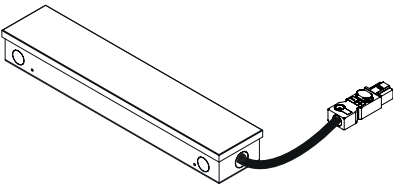


Splice Box 20W, 1% dim, 0-10V, 120V. Size: 9'' x 2'' x 1.5''

SP20W500MA-120-V01

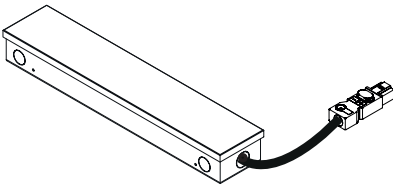

Splice Box 14W, 1% dim, 0-10V, 277V . Size: 9'' x 2'' x 1.5''

SP14W500MA-277-V01

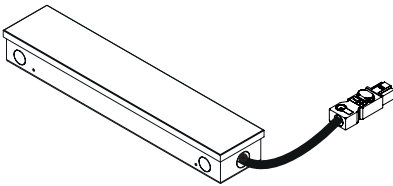

Optional Accessories

Registration Tray -non electrical, place holder for non IC new construction, ø 2.95

TRAY-0001

