


## EasyKap 80 Round Wall-Washer Airtight - IC Rated


Ceiling Recessed Trim Downlight




### Dimensions



ø 2.95"  
CUT OUT



ø 3.14"



14.7" x 11.1" x 4.2"

### Certifications



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.

FLOS. USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011

### Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JA8-2019 CA Title 24 listed and CCEA Chicago Plenum.

### Lamp

Lamps Type	LED ARRAY
Wattage	9.2W
Output Nominal	935lm, 974lm
Color Temperature	2700K, 3000K
Color rendering	CRI 90

### Optical

Beam Angle	28°
Lighting Type	Direct
Light Distribution	Symmetric

### Physical

Material	Aluminum
Aiming	Wall Washer
Weight	0.6 Lbs
Ingress Protection Rating	IP54
Finishes	Painted lacquer

☐ B1 White

☒ 74 Black

☐ GL Matt Gold



### Installation type

Ceiling Recessed

### Environment

Indoor dry location

## EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight




### Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral on housing
Current	500mA

### Performance


Maximum delivered output	622lm
Efficacy	67.6lm/W

### Dimensions




ø 2.95"

CUT OUT



ø 3.14"



14.7" x 11.1" x 4.2"

### Notes

Integral LED. COB is not field replaceable by the final user.

Softening diffuser accessory provided.

IP54 - Suitable for Damp locations.

Airtight Listed housing for new construction only.

JA8-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

### Certifications



JA8-2019 CA  
TITLE 24  
LISTED



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty


2 years from date of sale.

FLOS. USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011

EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight


How to specify

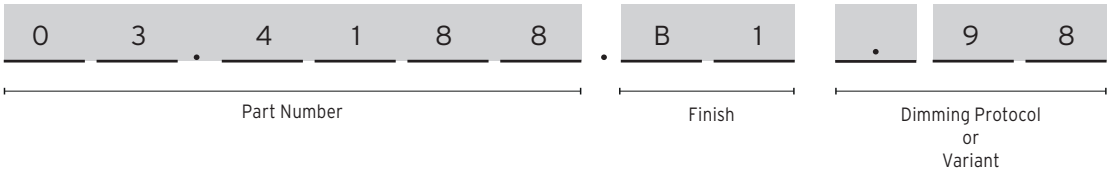

How to Specify ex. 03.4188.B1.98

Table with 8 columns: Part Number, CCT, CRI, Initial Lumens, Watts, Beam Angle, Finish, Variant. It lists two part numbers (03.4188 and 03.4189) with their respective specifications and a legend for finish colors (B1 = White, 74 = Black, GL = Gold).

Photometries

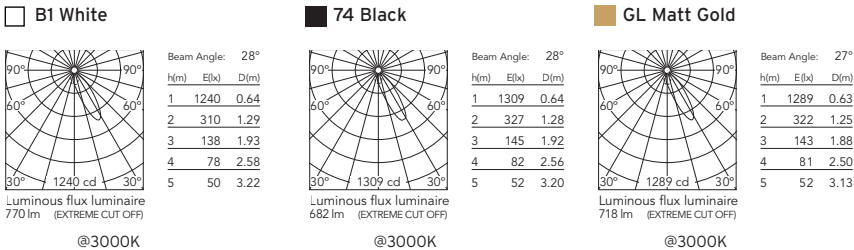

EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight

Required Housing and Hanger Bar

Kap 80 Airtight Housing for New construction, Integral 0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum	1 male, 1 female hanger bar Extendable from 14" to 24" centers. Qty required 2
08.7060.00.90	08.1201.00.UL

