



## The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

### Description

The new Tracking Magnet 48V system is creative, flexible, reliable and precise. Accent luminaires are installed by a magnetic fastening system and a secondary mechanical fastener. The range of luminaires is composed of accent illumination modules with different optics and linear luminaires with the Flos signature design. The Tracking Magnet is available in recessed, surface, or pendant mounted applications, making it an option in even the most varied of job conditions. Vertical and horizontal corners complete the system. The Tracking Magnet is perfect for retail displays where frequent changes are typical and absolute performance is required.


### Lamp

|                   |                                          |
|-------------------|------------------------------------------|
| System Lamp Type  | LED                                      |
| Color Temperature | 2700K, 3000K, *3500K, *4000K (See Notes) |
| Color Rendering   | CRI90                                    |
| Application       | General Lighting / Accent lighting       |


### Physical

|                           |                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Material                  | Aluminum                                                                                                                   |
| Ingress Protection Rating | IP20                                                                                                                       |
| Finishes                  | <input type="checkbox"/> 40 White <input checked="" type="checkbox"/> 14 White <input type="checkbox"/> 05 Polished Silver |
| Installation type         | Ceiling Suspension                                                                                                         |
| Environment               | Indoor                                                                                                                     |
| Field cuttable            | No                                                                                                                         |

### Suspended Installation

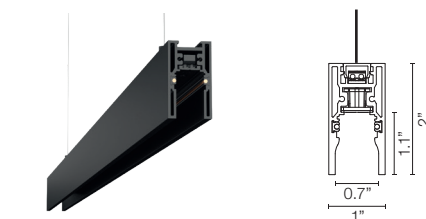

### Light Modules

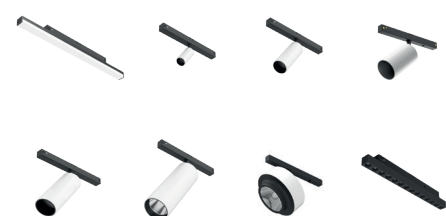

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### Electrical & Control

|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Driver location        | Remote                                                                                              |
| Driver Input Voltage   | 120V-277V                                                                                           |
| Driver Output Voltage  | 48V                                                                                                 |
| Maximum Driver Wattage | Class 2 - 96W                                                                                       |
| Control                | Standard 0-10V dimming / DALI /<br>On board / Casambi for Light Shadow Spot<br>and Multi Spot Mini. |
| N° Circuit             | 1 circuit                                                                                           |



## The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

### Notes

EC to supply site cabling from driver to track location.

Wattage per linear foot is dependent upon quantity and type of light modules used.


Spots and linear luminaires available with individually addressable DALI-Wireless circuitry, 0-10V (from 10% up to 100%) Dimming, Casambi for Light Shadow Spot and Multi Spot Mini.

0-10V Fixtures come from the factory set up at the lowest level 10% they always required a 0-10V signal to achieve the maximum output.

3500K, 4000K and other CCT available but not cataloged. Consult factory for additional color temperatures.



### Suspended Installation

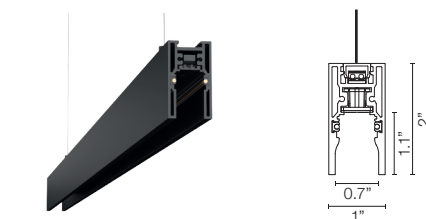

### Light Modules



### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.

### How To Specify

#### A. Select and position corners

1. Horizontal - Connect sections on flat surfaces (90° corner)
2. Inside - Transition from wall to ceiling (inside corner)
3. External - Turn outside corners for walls and soffits (270° corner)

#### B. Fill lengths between corners with Linear Housings


Select dimmable (DALI-FLOS Smart control and 0-10V fixtures) or non dimmable track (Built-in dimmer fixtures). Available section lengths are 3.3', 4.9', 6.7' or 8.2'.

#### C. Drivers

Quantity of drivers determined by total wattage or light elements in section (total maximum possible per linear foot is 29W). Maximum driver distance is 15'. Locate drivers nearby.

#### D. Select Spot heads


Light Strips are available in three nominal lengths: 11.8", 23.6", 35.4", 47.2" and 59'. Individual Spots are Spot 50, Spot 90, Spot 120, Spot 150 and Anthony.

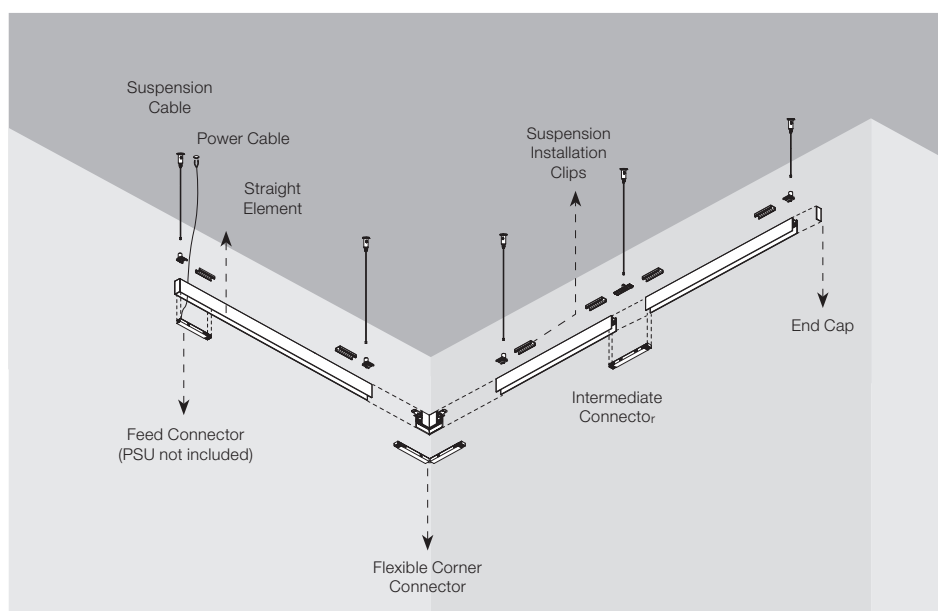

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Track

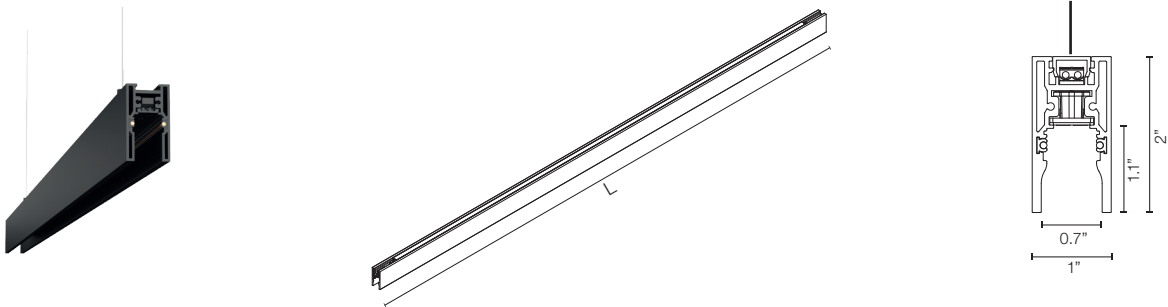

How to specify: 06.5070.14

| Length       | Part Number | Delivered Lumens | Finish                                                                                                           | Dimming Protocol                      |
|--------------|-------------|------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| 39.4" (1m)   | 06.5070     | 465 lm           | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05A = Polished Silver</div> | Dimmable on Board<br>Dimmable Casambi |
| 59" (1.5m)   | 06.5071     | 697.5 lm         |                                                                                                                  |                                       |
| 78.7" (2m)   | 06.5072     | 930 lm           |                                                                                                                  |                                       |
| 98.4" (2.5m) | 06.5073     | 1162.5 lm        |                                                                                                                  |                                       |
| 118.11" (3m) | 06.5074     | 1257 lm          | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>                                              |                                       |

How to specify: 06.5070.14

| Length       | Part Number | Delivered Lumens | Finish                                                                                                                                                             | Dimming Protocol                                            |
|--------------|-------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| 39.4" (1m)   | 06.5020     | 465 lm           | <div><input type="checkbox"/> 40 = White</div> <div><input checked="" type="checkbox"/> 14 = Black</div> <div><input type="checkbox"/> 05A = Polished Silver</div> | 1-10V, 10% Dimming<br>DALI, 10% Dimming<br>Dimmable Casambi |
| 59" (1.5m)   | 06.5021     | 697.5 lm         |                                                                                                                                                                    |                                                             |
| 78.7" (2m)   | 06.5022     | 930 lm           |                                                                                                                                                                    |                                                             |
| 98.4" (2.5m) | 06.5023     | 1162.5 lm        |                                                                                                                                                                    |                                                             |
| 118.11" (3m) | 06.5024     | 1257 lm          | <div><input type="checkbox"/> 40 = White</div> <div><input checked="" type="checkbox"/> 14 = Black</div>                                                           |                                                             |

## The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

### Corners




90° horizontal ceiling mechanical corner available. In order to create electrical continuity the flexible intermediate connector is required.

#### 90° mechanical angle.

Two end suspension connections included. Steel cable not included. No lighting on the upper part. Upper part connections included.

Part Number:



- 06.5025.14
- 06.5025.40
- 06.5025.05A



The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Connectors

|                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Feed connector for Tracking Magnet Suspension Up&amp;Down includes: 1 feed connector, 1 transparent feed cable 4m - 13ft. Includes beginning and end fixing ceiling kit. Suspension cable or rigid Rod not included.</p> <p>Part Number:</p> <p>08.0626.00</p>   | <p>Intermediate connector for Tracking Magnet Suspension Up&amp;Down (1 unit kit)</p> <p>Part Number:</p> <p>08.0612.14</p>   | <p>Flexible/Electrical Intermediate Corner for Tracking Magnet suspension if electrical continuity on corners is required.</p> <p>Part Number:</p> <p>08.0614.14</p>   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

\*Intermediate connectors to be ordered separately if electrical continuity on corners is required.

## The Tracking Magnet EVO Suspension Up&Down


High-tech LED lighting system for interior architecture

### Dimming controllers

Dimming Control Unit Box 48V  
0-10V Required for a 0-10V Dimming  
installation. 1 Dimming control can  
control up to 20 fixtures

Part Number:


■ 08.0613.14A

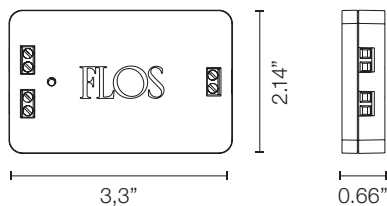

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Required Accesories

|                                                                                                                                                                                                                        |                                                                                                                                                                                                                       |                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Intermediate Suspension Kit<br>Part Number:<br>08.0627.00                                                                                                                                                              | End Cap kit ( 2 units)<br>Part Number:<br>06.5017.14<br>06.5017.40<br>06.5017.05A                                                                                                                                     | Suspension steel cable, lenght 4m (13ft)<br>Recommended where tilting will not occur in any case.<br>Part Number:<br>08.8634.00 |
|                                                                                                                                       |                                                                                                                                      |                                              |
| Suspension rod with rose, lenght 1m (3.3ft) M6 thread. Rigid rod to avoid the profile from tilting to be installed in places where a more rigid fixing system is required.<br>Part Number:<br>60.3014.14<br>60.3014.11 | Suspension rod extension, lenght 1m(3.3ft) M6 thread. Rigid rod to avoid the profile from tilting to be installed in places where a more rigid fixing system is required.<br>Part Number:<br>60.3097.14<br>60.3097.11 | Cover Plate<br>5" Junction Box Cover Plate for Remote Installation.<br>Part Number:<br>08.8883.14A<br>08.8883.40A               |
|                                                                                                                                     |                                                                                                                                    |                                            |

| Profile                            | Minimum qty fixing points depending on track length |
|------------------------------------|-----------------------------------------------------|
| 39.37" / 59.06" [1000 mm/ 1500 mm] | 2                                                   |
| 78.74" / 98.42" [2000 mm/ 2500 mm] | 3                                                   |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture





Required Drivers

|                                                                               |                                                                               |                                                                               |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| LED power supply source for remote installation, 48V/96W, 120-277V, UL Listed | LED power supply source for remote installation, 48V/60W, 120-277V, UL Listed | LED power supply source for remote installation, 48V/30W, 120-277V, UL Listed |
| Part Number:<br><br>LEDSB96W48V-NDM-D01                                       | Part Number:<br><br>LEDSB60W48V-NDM-D01                                       | Part Number:<br><br>LEDSB30W48V-NDM-D01                                       |
|                                                                               |                                                                               |                                                                               |
|                                                                               |                                                                               |                                                                               |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture


Surface mounted canopies

|                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Surface mount canopy Non Dimmable for Tracking Magnet SuspensionUp&amp;Down includes: 1 drivers downlight: 96W, 48V, 120-277V</p> <p>Part Number:</p> <p>08U4806.14<br/>08U4806.40</p>                                     | <p>Surface mount canopy Dimmable for Tracking Magnet Suspension Down includes: 1 driver downlight: 96W, 48V, 120-277V 1 Dimming Control Unit Box: 08.0613.14A</p> <p>Part Number:</p> <p>08U4806.14.1V<br/>08U4806.40.1V</p>  | <p>Surface mount canopy Non Dimmable for Tracking Magnet SuspensionUp&amp;Down includes: 1 drivers downlight: 60W, 48V, 120-277V</p> <p>Part Number:</p> <p>08U4808.14<br/>08U4808.40</p>  |
| <p>Surface mount canopy Dimmable for Tracking Magnet Suspension Down includes: 1 driver downlight: 60W, 48V, 120-277V 1 Dimming Control Unit Box: 08.0613.14A</p> <p>Part Number:</p> <p>08U4808.14.1V<br/>08U4808.40.1V</p>  |                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                |


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

How to specify

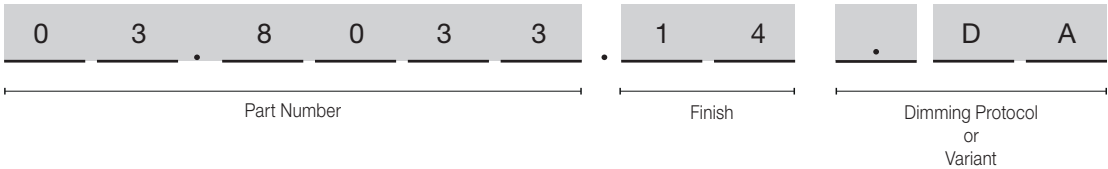

Spot 50

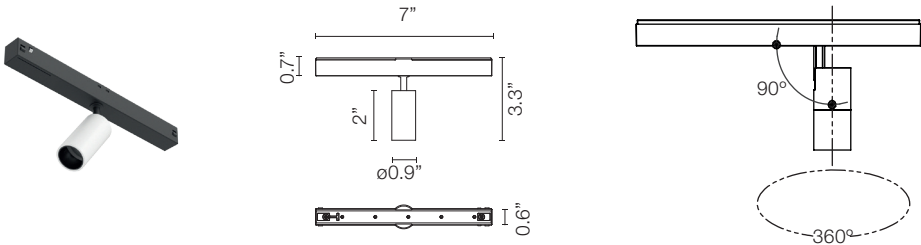

| CCT    | CRI  | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                              | Dimming Protocol                                                           | Photometric                                                                                                                                                                                                                                                                                |      |      |        |      |       |      |       |      |      |      |      |      |
|--------|------|----------------|------------------|-------|-------------|-------------|---------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|--------|------|-------|------|-------|------|------|------|------|------|
| 3000   | 90   | 307            | 212              | 3.5   | 26°         | 03.8033     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> | A Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming | <div><p>Luminous flux luminaire<br/>212 lm</p></div> <table><tr><th>E(h)</th><th>D(m)</th></tr><tr><td>1 1012</td><td>0.47</td></tr><tr><td>2 253</td><td>0.94</td></tr><tr><td>3 112</td><td>1.41</td></tr><tr><td>4 63</td><td>1.88</td></tr><tr><td>5 40</td><td>2.35</td></tr></table> | E(h) | D(m) | 1 1012 | 0.47 | 2 253 | 0.94 | 3 112 | 1.41 | 4 63 | 1.88 | 5 40 | 2.35 |
| E(h)   | D(m) |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 1 1012 | 0.47 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 2 253  | 0.94 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 3 112  | 1.41 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 4 63   | 1.88 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 5 40   | 2.35 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 2700   | 90   | 286            | 205              | 3.5   | 26°         | 03.8032     | <div><div></div> 05 = Polished Silver</div>                         | B Dimmable on Board<br>B1V = 0-10V, 10% Dimming<br>BDA = DALI, 10% Dimming | <div><p>Luminous flux luminaire<br/>205 lm</p></div> <table><tr><th>E(h)</th><th>D(m)</th></tr><tr><td>1 977</td><td>0.47</td></tr><tr><td>2 244</td><td>0.94</td></tr><tr><td>3 109</td><td>1.41</td></tr><tr><td>4 61</td><td>1.88</td></tr><tr><td>5 39</td><td>2.35</td></tr></table>  | E(h) | D(m) | 1 977  | 0.47 | 2 244 | 0.94 | 3 109 | 1.41 | 4 61 | 1.88 | 5 39 | 2.35 |
| E(h)   | D(m) |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 1 977  | 0.47 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 2 244  | 0.94 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 3 109  | 1.41 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 4 61   | 1.88 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |
| 5 39   | 2.35 |                |                  |       |             |             |                                                                     |                                                                            |                                                                                                                                                                                                                                                                                            |      |      |        |      |       |      |       |      |      |      |      |      |


Included Accessories Spot 50





|              |           |
|--------------|-----------|
| Cross Baffle | Honeycomb |
|              |           |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 90

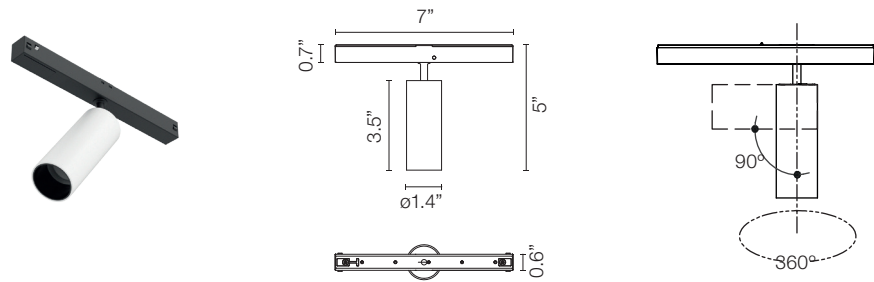

| CCT   | CRI       | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                                                                                                                                                                                                                                                                                                                                                               | Dimming Protocol                                                                                        | Photometric                                                                                                                                                                                                                                                                                                                                                                                                         |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
|-------|-----------|----------------|------------------|-------|-------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|------|-----------|---|-----------|---|-----------|---|----------|---|----------|---|----------|
| 3000  | 90        | 656            | 443              | 8.5   | 14°         | 03.8043     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Polished Silver</div>                                                                                                                                                                                                                                                                                                      | <div>B = Dimmable on Board</div> <div>B1V = 0-10V, 10% Dimming</div> <div>BDA = DALI, 10% Dimming</div> | <div><table><tr><td>E(lx)</td><td>D(m)</td></tr><tr><td>h(m)</td><td>14°</td></tr><tr><td>1</td><td>5805 0.25</td></tr><tr><td>2</td><td>1451 0.49</td></tr><tr><td>3</td><td>645 0.74</td></tr><tr><td>4</td><td>363 0.98</td></tr><tr><td>5</td><td>232 1.23</td></tr></table><div>Luminous flux luminaire 443 lm</div></div> | E(lx) | D(m) | h(m) | 14°       | 1 | 5805 0.25 | 2 | 1451 0.49 | 3 | 645 0.74 | 4 | 363 0.98 | 5 | 232 1.23 |
| E(lx) | D(m)      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| h(m)  | 14°       |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 1     | 5805 0.25 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 2     | 1451 0.49 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 3     | 645 0.74  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 4     | 363 0.98  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 5     | 232 1.23  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 2700  | 90        | 610            | 428              | 8.5   | 14°         | 03.8042     | <div><table><tr><td>E(lx)</td><td>D(m)</td></tr><tr><td>h(m)</td><td>14°</td></tr><tr><td>1</td><td>5601 0.25</td></tr><tr><td>2</td><td>1400 0.49</td></tr><tr><td>3</td><td>622 0.74</td></tr><tr><td>4</td><td>350 0.98</td></tr><tr><td>5</td><td>224 1.23</td></tr></table><div>Luminous flux luminaire 428 lm</div></div> | E(lx)                                                                                                   | D(m)                                                                                                                                                                                                                                                                                                                                                                                                                | h(m)  | 14°  | 1    | 5601 0.25 | 2 | 1400 0.49 | 3 | 622 0.74  | 4 | 350 0.98 | 5 | 224 1.23 |   |          |
| E(lx) | D(m)      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| h(m)  | 14°       |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 1     | 5601 0.25 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 2     | 1400 0.49 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 3     | 622 0.74  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 4     | 350 0.98  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 5     | 224 1.23  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 3000  | 90        | 656            | 406              | 8.5   | 22°         | 03.8045     | <div><table><tr><td>E(lx)</td><td>D(m)</td></tr><tr><td>h(m)</td><td>22°</td></tr><tr><td>1</td><td>2403 0.38</td></tr><tr><td>2</td><td>601 0.77</td></tr><tr><td>3</td><td>267 1.15</td></tr><tr><td>4</td><td>150 1.54</td></tr><tr><td>5</td><td>96 1.92</td></tr></table><div>Luminous flux luminaire 406 lm</div></div>   | E(lx)                                                                                                   | D(m)                                                                                                                                                                                                                                                                                                                                                                                                                | h(m)  | 22°  | 1    | 2403 0.38 | 2 | 601 0.77  | 3 | 267 1.15  | 4 | 150 1.54 | 5 | 96 1.92  |   |          |
| E(lx) | D(m)      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| h(m)  | 22°       |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 1     | 2403 0.38 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 2     | 601 0.77  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 3     | 267 1.15  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 4     | 150 1.54  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 5     | 96 1.92   |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 2700  | 90        | 610            | 392              | 8.5   | 22°         | 03.8044     | <div><table><tr><td>E(lx)</td><td>D(m)</td></tr><tr><td>h(m)</td><td>22°</td></tr><tr><td>1</td><td>2319 0.38</td></tr><tr><td>2</td><td>580 0.77</td></tr><tr><td>3</td><td>258 1.15</td></tr><tr><td>4</td><td>145 1.54</td></tr><tr><td>5</td><td>93 1.92</td></tr></table><div>Luminous flux luminaire 392 lm</div></div>   | E(lx)                                                                                                   | D(m)                                                                                                                                                                                                                                                                                                                                                                                                                | h(m)  | 22°  | 1    | 2319 0.38 | 2 | 580 0.77  | 3 | 258 1.15  | 4 | 145 1.54 | 5 | 93 1.92  |   |          |
| E(lx) | D(m)      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| h(m)  | 22°       |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 1     | 2319 0.38 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 2     | 580 0.77  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 3     | 258 1.15  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 4     | 145 1.54  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |
| 5     | 93 1.92   |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                     |       |      |      |           |   |           |   |           |   |          |   |          |   |          |


Included Accessories Spot 90

|              |           |
|--------------|-----------|
| Cross Baffle | Honeycomb |
|              |           |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 120 Power LED

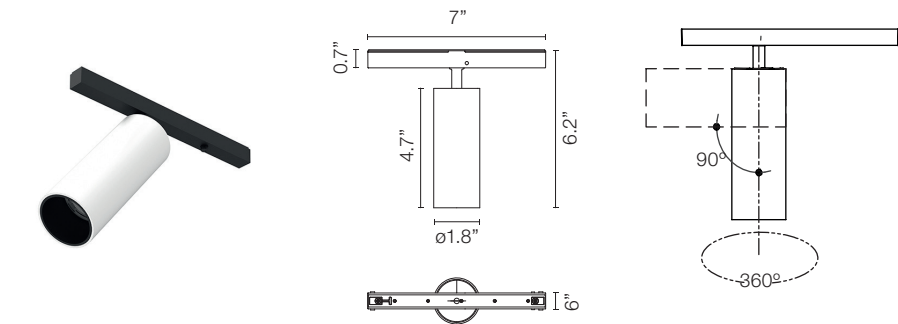

| CCT    | CRI  | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                                                                                                                                                                                                                                                                      | Dimming Protocol                                                                                                                                             | Photometric                                                                                                                                                                                                                                                                                                                 |        |      |        |      |        |      |       |      |       |      |       |      |
|--------|------|----------------|------------------|-------|-------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------|--------|------|--------|------|-------|------|-------|------|-------|------|
| 3000   | 90   | 779            | 558              | 12    | 11°         | 03.8053     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Polished Silver</div>                                                                                                                                                                                                             | A Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming<br><br>B Dimmable on Board<br>B1V = 0-10V, 10% Dimming<br>BDA = DALI, 10% Dimming | <div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 4780</td><td>0.31</td></tr><tr><td>2 1195</td><td>0.61</td></tr><tr><td>3 531</td><td>0.92</td></tr><tr><td>4 299</td><td>1.23</td></tr><tr><td>5 191</td><td>1.53</td></tr></tbody></table><div>Luminous flux luminaire 887 lm</div></div> | E(lx)  | D(m) | 1 4780 | 0.31 | 2 1195 | 0.61 | 3 531 | 0.92 | 4 299 | 1.23 | 5 191 | 1.53 |
| E(lx)  | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 1 4780 | 0.31 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 2 1195 | 0.61 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 3 531  | 0.92 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 4 299  | 1.23 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 5 191  | 1.53 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 2700   | 90   | 724            | 539              | 12    | 11°         | 03.8052     | <div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 4547</td><td>0.31</td></tr><tr><td>2 1137</td><td>0.61</td></tr><tr><td>3 505</td><td>0.92</td></tr><tr><td>4 284</td><td>1.23</td></tr><tr><td>5 182</td><td>1.53</td></tr></tbody></table><div>Luminous flux luminaire 854 lm</div></div> | E(lx)                                                                                                                                                        | D(m)                                                                                                                                                                                                                                                                                                                        | 1 4547 | 0.31 | 2 1137 | 0.61 | 3 505  | 0.92 | 4 284 | 1.23 | 5 182 | 1.53 |       |      |
| E(lx)  | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 1 4547 | 0.31 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 2 1137 | 0.61 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 3 505  | 0.92 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 4 284  | 1.23 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 5 182  | 1.53 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 3000   | 90   | 779            | 505              | 12    | 17°         | 03.8055     | <div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 1437</td><td>0.73</td></tr><tr><td>2 359</td><td>1.45</td></tr><tr><td>3 160</td><td>2.18</td></tr><tr><td>4 90</td><td>2.91</td></tr><tr><td>5 57</td><td>3.64</td></tr></tbody></table><div>Luminous flux luminaire 829 lm</div></div>    | E(lx)                                                                                                                                                        | D(m)                                                                                                                                                                                                                                                                                                                        | 1 1437 | 0.73 | 2 359  | 1.45 | 3 160  | 2.18 | 4 90  | 2.91 | 5 57  | 3.64 |       |      |
| E(lx)  | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 1 1437 | 0.73 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 2 359  | 1.45 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 3 160  | 2.18 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 4 90   | 2.91 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 5 57   | 3.64 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 2700   | 90   | 724            | 487              | 12    | 17°         | 03.8054     | <div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 1367</td><td>0.73</td></tr><tr><td>2 342</td><td>1.45</td></tr><tr><td>3 152</td><td>2.18</td></tr><tr><td>4 85</td><td>2.91</td></tr><tr><td>5 55</td><td>3.64</td></tr></tbody></table><div>Luminous flux luminaire 599 lm</div></div>    | E(lx)                                                                                                                                                        | D(m)                                                                                                                                                                                                                                                                                                                        | 1 1367 | 0.73 | 2 342  | 1.45 | 3 152  | 2.18 | 4 85  | 2.91 | 5 55  | 3.64 |       |      |
| E(lx)  | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 1 1367 | 0.73 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 2 342  | 1.45 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 3 152  | 2.18 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 4 85   | 2.91 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |
| 5 55   | 3.64 |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                             |        |      |        |      |        |      |       |      |       |      |       |      |


Included Accessories Spot 120

| Cross Baffle | Honeycomb |
|--------------|-----------|
|              |           |


The Tracking Magnet EVO Suspension Up&Down





High-tech LED lighting system for interior architecture

How to specify

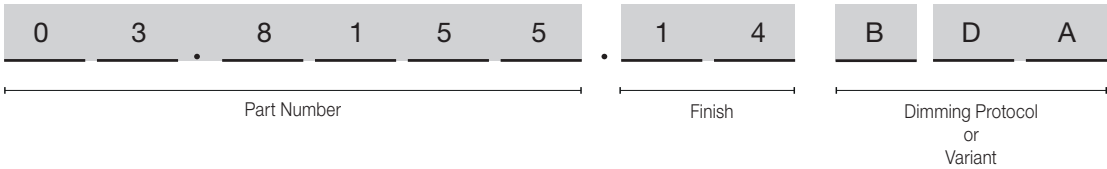

Spot 120 LED ARRAY

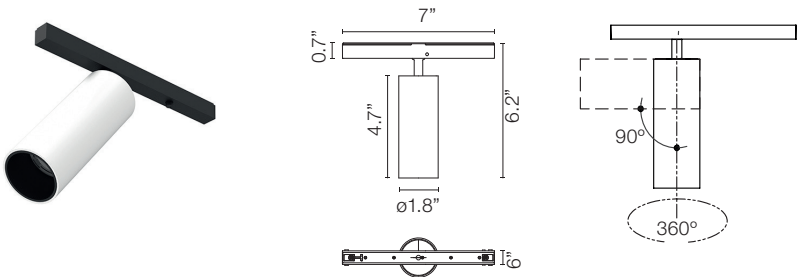

| CCT         | CRI  | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                                                                                                                                                                                                                                                                                                                         | Dimming Protocol                                                             | Photometric                                                                                                                                                                                                                                                                                                                                                                    |             |      |             |     |             |  |            |  |            |  |            |  |
|-------------|------|----------------|------------------|-------|-------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------|-------------|-----|-------------|--|------------|--|------------|--|------------|--|
| 3000        | 90   | 1138           | 687              | 12.5  | 17°         | 03.8155     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Polished Silver</div>                                                                                                                                                                                                                                                                | B = Dimmable on Board<br>B1V = 0-10V, 10% Dimming<br>BDA = DALI, 10% Dimming | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 4780 0.31</td><td>17°</td></tr><tr><td>2 1195 0.61</td><td></td></tr><tr><td>3 531 0.92</td><td></td></tr><tr><td>4 299 1.23</td><td></td></tr><tr><td>5 191 1.53</td><td></td></tr></tbody></table></div> | E(h)        | D(m) | 1 4780 0.31 | 17° | 2 1195 0.61 |  | 3 531 0.92 |  | 4 299 1.23 |  | 5 191 1.53 |  |
| E(h)        | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 1 4780 0.31 | 17°  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 2 1195 0.61 |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 3 531 0.92  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 4 299 1.23  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 5 191 1.53  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 2700        | 90   | 1075           | 654              | 12.5  | 17°         | 03.8154     | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 4547 0.31</td><td>17°</td></tr><tr><td>2 1137 0.61</td><td></td></tr><tr><td>3 505 0.92</td><td></td></tr><tr><td>4 284 1.23</td><td></td></tr><tr><td>5 182 1.53</td><td></td></tr></tbody></table></div> | E(h)                                                                         | D(m)                                                                                                                                                                                                                                                                                                                                                                           | 1 4547 0.31 | 17°  | 2 1137 0.61 |     | 3 505 0.92  |  | 4 284 1.23 |  | 5 182 1.53 |  |            |  |
| E(h)        | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 1 4547 0.31 | 17°  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 2 1137 0.61 |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 3 505 0.92  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 4 284 1.23  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 5 182 1.53  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 3000        | 90   | 1138           | 629              | 12.5  | 40°         | 03.8157     | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 1437 0.73</td><td>40°</td></tr><tr><td>2 359 1.45</td><td></td></tr><tr><td>3 160 2.18</td><td></td></tr><tr><td>4 90 2.91</td><td></td></tr><tr><td>5 57 3.64</td><td></td></tr></tbody></table></div>    | E(h)                                                                         | D(m)                                                                                                                                                                                                                                                                                                                                                                           | 1 1437 0.73 | 40°  | 2 359 1.45  |     | 3 160 2.18  |  | 4 90 2.91  |  | 5 57 3.64  |  |            |  |
| E(h)        | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 1 1437 0.73 | 40°  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 2 359 1.45  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 3 160 2.18  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 4 90 2.91   |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 5 57 3.64   |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 2700        | 90   | 1075           | 599              | 12.5  | 40°         | 03.8156     | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 1367 0.73</td><td>40°</td></tr><tr><td>2 342 1.45</td><td></td></tr><tr><td>3 152 2.18</td><td></td></tr><tr><td>4 85 2.91</td><td></td></tr><tr><td>5 55 3.64</td><td></td></tr></tbody></table></div>    | E(h)                                                                         | D(m)                                                                                                                                                                                                                                                                                                                                                                           | 1 1367 0.73 | 40°  | 2 342 1.45  |     | 3 152 2.18  |  | 4 85 2.91  |  | 5 55 3.64  |  |            |  |
| E(h)        | D(m) |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 1 1367 0.73 | 40°  |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 2 342 1.45  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 3 152 2.18  |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 4 85 2.91   |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |
| 5 55 3.64   |      |                |                  |       |             |             |                                                                                                                                                                                                                                                                                                                                                                                |                                                                              |                                                                                                                                                                                                                                                                                                                                                                                |             |      |             |     |             |  |            |  |            |  |            |  |


Included Accessories Spot 120

|              |           |
|--------------|-----------|
| Cross Baffle | Honeycomb |
|              |           |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 150

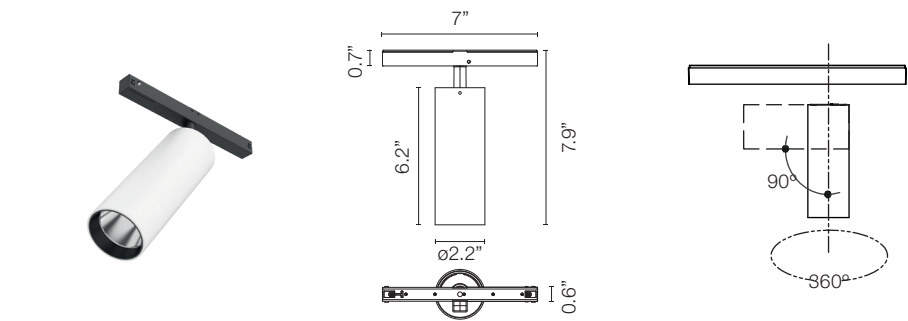

| CCT  | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                   | Dimming Protocol                                                           | Photometric                                                                         |
|------|-----|----------------|------------------|-------|-------------|-------------|--------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 3000 | 90  | 2115           | 1872             | 22.5  | 16°         | 03.8073     | 40 = White<br>14 = Black | A Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming | Beam spread diagram and table for 16° beam spread. Luminous flux luminaire 1872 lm. |
| 2700 | 90  | 2000           | 1770             | 22.5  | 16°         | 03.8072     | 05 = Polished Silver     | B Dimmable on Board<br>B1V = 0-10V, 10% Dimming<br>BDA = DALI, 10% Dimming | Beam spread diagram and table for 16° beam spread. Luminous flux luminaire 1770 lm. |
| 3000 | 90  | 2115           | 1816             | 22.5  | 28°         | 03.8075     | 40 = White<br>14 = Black | A Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming | Beam spread diagram and table for 28° beam spread. Luminous flux luminaire 1816 lm. |
| 2700 | 90  | 2000           | 1717             | 22.5  | 28°         | 03.8074     | 05 = Polished Silver     | B Dimmable on Board<br>B1V = 0-10V, 10% Dimming<br>BDA = DALI, 10% Dimming | Beam spread diagram and table for 28° beam spread. Luminous flux luminaire 1717 lm. |
| 3000 | 90  | 2115           | 1838             | 22.5  | 40°         | 03.8077     | 40 = White<br>14 = Black | A Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming | Beam spread diagram and table for 40° beam spread. Luminous flux luminaire 1838 lm. |
| 2700 | 90  | 2000           | 1738             | 22.5  | 40°         | 03.8076     | 05 = Polished Silver     | B Dimmable on Board<br>B1V = 0-10V, 10% Dimming<br>BDA = DALI, 10% Dimming | Beam spread diagram and table for 40° beam spread. Luminous flux luminaire 1738 lm. |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture


Optional Accessories Spot 150

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Cross Baffle                                                                        | Elliptical Lens                                                                     | Flood Lens                                                                          |
| Part Number:<br>08.8429.00                                                          | Part Number:<br>08.8431.00                                                          | Part Number:<br>08.8432.00                                                          |
|    |    |  |
| Honeycomb                                                                           | Snoot shielding cone                                                                |                                                                                     |
| Part Number:<br>08.8428.00                                                          | Part Number:<br>08.0526.00                                                          |                                                                                     |
|  |  |                                                                                     |


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

How to specify

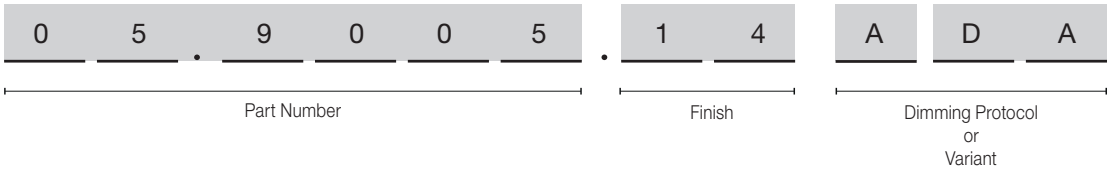

Light Shadow Spot 30

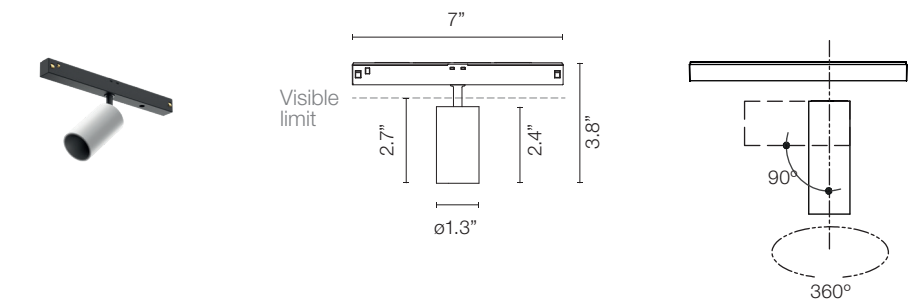


| CCT  | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                | Dimming Protocol                                                                                       |
|------|-----|----------------|------------------|-------|-------------|-------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 3000 | 90  | 318            | 270              | 4     | 11°         | 05.9005     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 298            | 253              | 4     | 11°         | 05.9000     |                                                                       |                                                                                                        |
| 3000 | 90  | 318            | 274              | 4     | 22°         | 05.9006     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 298            | 257              | 4     | 22°         | 05.9001     |                                                                       |                                                                                                        |
| 3000 | 90  | 318            | 263              | 4     | 29°         | 05.9007     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 298            | 246              | 4     | 29°         | 05.9002     |                                                                       |                                                                                                        |
| 3000 | 90  | 318            | 262              | 4     | 43°         | 05.9008     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 298            | 246              | 4     | 43°         | 05.9003     |                                                                       |                                                                                                        |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Photometric Light Shadow Spot 30

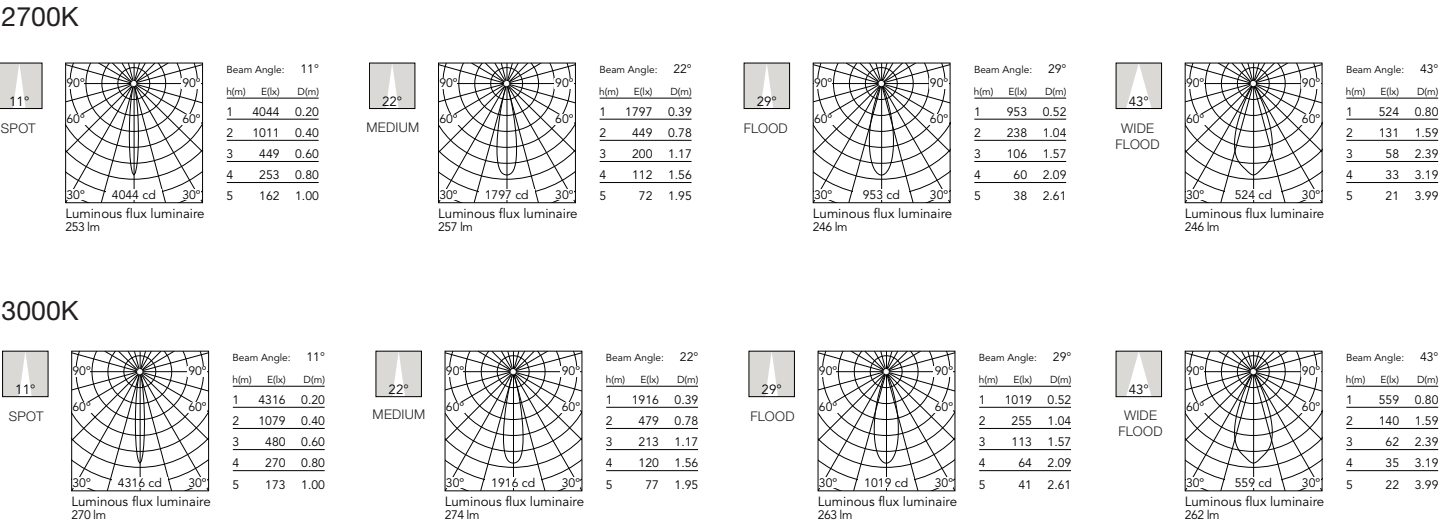


Optional Accessories Light Shadow Spot 30

|                                                                                     |                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Honeycomb                                                                           | Dicroic CCT Filter                                                                  | Dicroic CCT Filter                                                                    |
|                                                                                     | INCREASE                                                                            | DECREASE                                                                              |
|                                                                                     | 2700K >> 3125±75K                                                                   | 2700K >> 2450±75K                                                                     |
|                                                                                     | 3000K >> 3600±75K                                                                   | 3000K >> 2700±75K                                                                     |
| Part Number:                                                                        | Part Number:                                                                        | Part Number:                                                                          |
| 08.0790.00                                                                          | 08.0791.00                                                                          | 08.0792.00                                                                            |
|  |  |  |


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

How to specify

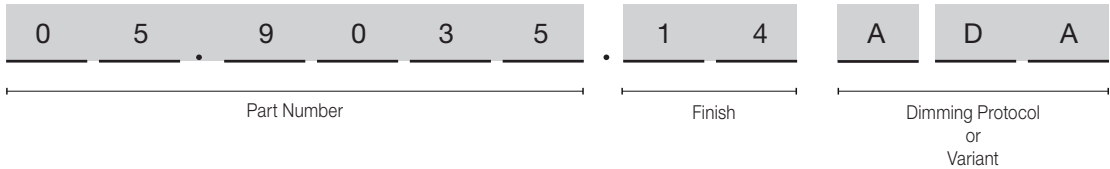

Light Shadow Spot 45

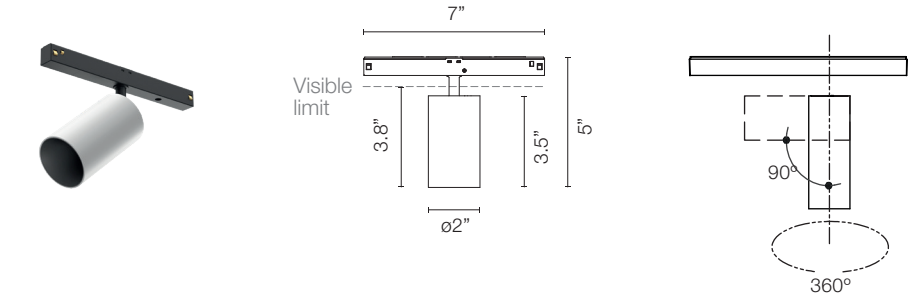

| CCT  | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                                                                | Dimming Protocol                                                                                       |
|------|-----|----------------|------------------|-------|-------------|-------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 3000 | 90  | 844            | 686              | 10.5  | 15°         | 05.9035     | <div> <div></div>40 = White <div></div>14 = Black <div></div>ER = Brushed Steel <div></div>ES = Brushed Bronze </div> | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 799            | 650              | 10.5  | 15°         | 05.9030     |                                                                                                                       |                                                                                                        |
| 3000 | 90  | 844            | 682              | 10.5  | 21°         | 05.9036     | <div> <div></div>40 = White <div></div>14 = Black <div></div>ER = Brushed Steel <div></div>ES = Brushed Bronze </div> | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 799            | 645              | 10.5  | 21°         | 05.9031     |                                                                                                                       |                                                                                                        |
| 3000 | 90  | 844            | 682              | 10.5  | 31°         | 05.9037     | <div> <div></div>40 = White <div></div>14 = Black <div></div>ER = Brushed Steel <div></div>ES = Brushed Bronze </div> | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 799            | 646              | 10.5  | 31°         | 05.9032     |                                                                                                                       |                                                                                                        |


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Photometric Light Shadow Spot 45

Spot 15°

2700K




Beam Angle: 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 8012  | 0.27 |
| 2    | 2003  | 0.54 |
| 3    | 890   | 0.80 |
| 4    | 501   | 1.07 |
| 5    | 320   | 1.34 |

Luminous flux luminaire  
650 lm

3000K




Beam Angle: 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 8456  | 0.27 |
| 2    | 2114  | 0.54 |
| 3    | 940   | 0.80 |
| 4    | 528   | 1.07 |
| 5    | 338   | 1.34 |

Luminous flux luminaire  
686 lm

Medium 21°

2700K




Beam Angle: 21°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 5163  | 0.36 |
| 2    | 1291  | 0.73 |
| 3    | 574   | 1.09 |
| 4    | 323   | 1.46 |
| 5    | 207   | 1.82 |

Luminous flux luminaire  
645 lm

3000K




Beam Angle: 21°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 5459  | 0.36 |
| 2    | 1365  | 0.73 |
| 3    | 607   | 1.09 |
| 4    | 341   | 1.46 |
| 5    | 218   | 1.82 |

Luminous flux luminaire  
682 lm

Flood 31°

2700K




Beam Angle: 31°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2296  | 0.56 |
| 2    | 574   | 1.11 |
| 3    | 255   | 1.67 |
| 4    | 144   | 2.22 |
| 5    | 92    | 2.78 |

Luminous flux luminaire  
646 lm

3000K




Beam Angle: 31°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2424  | 0.56 |
| 2    | 606   | 1.11 |
| 3    | 269   | 1.67 |
| 4    | 152   | 2.22 |
| 5    | 97    | 2.78 |

Luminous flux luminaire  
682 lm

Flood 31°

2700K




Beam Angle: 31°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2296  | 0.56 |
| 2    | 574   | 1.11 |
| 3    | 255   | 1.67 |
| 4    | 144   | 2.22 |
| 5    | 92    | 2.78 |

Luminous flux luminaire  
646 lm

3000K



Beam Angle: 31°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2424  | 0.56 |
| 2    | 606   | 1.11 |
| 3    | 269   | 1.67 |
| 4    | 152   | 2.22 |
| 5    | 97    | 2.78 |

Luminous flux luminaire  
682 lm


Optional Accessories Light Shadow Spot 45

|                                                        |                                                                                                                                               |                                                                                                                                               |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Honeycomb</p> <p>Part Number:</p> <p>08.0793.00</p> | <p>Dicroic CCT Filter</p> <p>INCREASE</p> <p>2700K &gt;&gt; 3125±75K</p> <p>3000K &gt;&gt; 3600±75K</p> <p>Part Number:</p> <p>08.0794.00</p> | <p>Dicroic CCT Filter</p> <p>DECREASE</p> <p>2700K &gt;&gt; 2450±75K</p> <p>3000K &gt;&gt; 2700±75K</p> <p>Part Number:</p> <p>08.0795.00</p> |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

How to specify

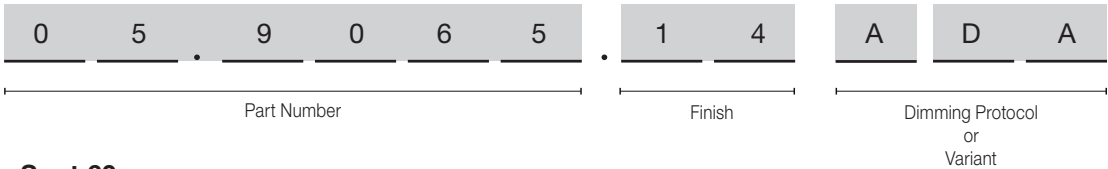

Light Shadow Spot 60

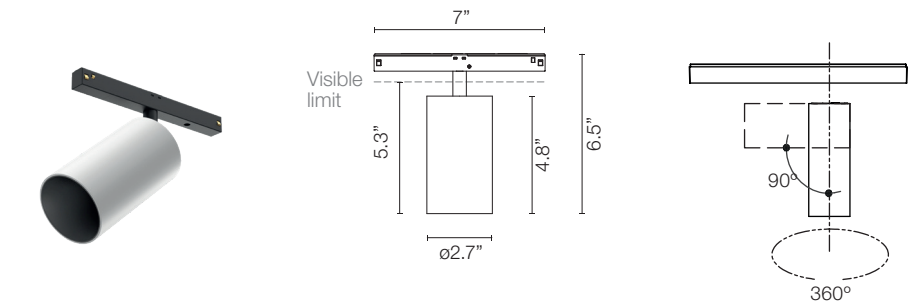

| CCT  | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                | Dimming Protocol                                                                                       |
|------|-----|----------------|------------------|-------|-------------|-------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 3000 | 90  | 844            | 808              | 10    | 9°          | 05.9065     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 799            | 765              | 10    | 9°          | 05.9060     |                                                                       |                                                                                                        |
| 3000 | 90  | 1751           | 1375             | 20    | 15°         | 05.9066     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 1593           | 1251             | 20    | 15°         | 05.9061     |                                                                       |                                                                                                        |
| 3000 | 90  | 1751           | 1427             | 20    | 26°         | 05.9067     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 1593           | 1298             | 20    | 26°         | 05.9062     |                                                                       |                                                                                                        |
| 3000 | 90  | 1751           | 1431             | 20    | 33°         | 05.9068     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 1593           | 1304             | 20    | 33°         | 05.9063     |                                                                       |                                                                                                        |
| 3000 | 90  | 1751           | 1390             | 20    | 43°         | 05.9069     | 40 = White<br>14 = Black<br>ER = Brushed Steel<br>ES = Brushed Bronze | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ACB = Dimmable Casambi<br>ADA = DALI, 10% Dimming |
| 2700 | 90  | 1593           | 1268             | 20    | 43°         | 05.9064     |                                                                       |                                                                                                        |


## The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

### Photometric Light Shadow Spot 60

#### Super Spot 9°


2700K



Beam Angle: 9°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 24922 | 0.16 |
| 2    | 6230  | 0.32 |
| 3    | 2769  | 0.48 |
| 4    | 1558  | 0.64 |
| 5    | 997   | 0.80 |

3000K




Beam Angle: 9°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 26322 | 0.16 |
| 2    | 6581  | 0.32 |
| 3    | 2925  | 0.48 |
| 4    | 1645  | 0.64 |
| 5    | 1053  | 0.80 |

#### Spot 15°


2700K



Beam Angle: 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 14350 | 0.27 |
| 2    | 3587  | 0.54 |
| 3    | 1594  | 0.81 |
| 4    | 897   | 1.09 |
| 5    | 574   | 1.36 |

3000K




Beam Angle: 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 15772 | 0.27 |
| 2    | 3943  | 0.54 |
| 3    | 1752  | 0.81 |
| 4    | 986   | 1.09 |
| 5    | 631   | 1.36 |

#### Medium 26°


2700K



Beam Angle: 26°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 7377  | 0.45 |
| 2    | 1844  | 0.91 |
| 3    | 820   | 1.36 |
| 4    | 461   | 1.82 |
| 5    | 295   | 2.27 |

3000K




Beam Angle: 26°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 8110  | 0.45 |
| 2    | 2027  | 0.91 |
| 3    | 901   | 1.36 |
| 4    | 507   | 1.82 |
| 5    | 324   | 2.27 |

#### Flood 33°


2700K



Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 4472  | 0.60 |
| 2    | 1118  | 1.20 |
| 3    | 497   | 1.80 |
| 4    | 279   | 2.40 |
| 5    | 179   | 3.00 |

3000K




Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 4907  | 0.60 |
| 2    | 1227  | 1.20 |
| 3    | 545   | 1.80 |
| 4    | 307   | 2.40 |
| 5    | 196   | 3.00 |

#### Wide Flood 43°


2700K



Beam Angle: 43°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2761  | 0.79 |
| 2    | 690   | 1.59 |
| 3    | 307   | 2.38 |
| 4    | 173   | 3.17 |
| 5    | 110   | 3.97 |

3000K



Beam Angle: 43°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 3026  | 0.79 |
| 2    | 757   | 1.59 |
| 3    | 336   | 2.38 |
| 4    | 189   | 3.17 |
| 5    | 121   | 3.97 |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture


Optional Accessories Light Shadow Spot 60

|                                                                                     |                                        |                                                                                     |                                        |
|-------------------------------------------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------|
| Honeycomb Super Spot                                                                |                                        | Honeycomb Spot / Medium / Flood / Wide Flood                                        |                                        |
| Part Number:                                                                        |                                        | Part Number:                                                                        |                                        |
| 08.0175.14                                                                          |                                        | 08.0176.14                                                                          |                                        |
|    |                                        |    |                                        |
| INCREASE                                                                            |                                        | INCREASE                                                                            |                                        |
| Dicroic Super Spot                                                                  | 2700K >> 3125±75K<br>3000K >> 3600±75K | Dicroic Spot / Medium / Flood / Wide Flood                                          | 2700K >> 3125±75K<br>3000K >> 3600±75K |
| Part Number:                                                                        |                                        | Part Number:                                                                        |                                        |
| 08.0796.00                                                                          |                                        | 08.0798.00                                                                          |                                        |
|  |                                        |  |                                        |
| DECREASE                                                                            |                                        | DECREASE                                                                            |                                        |
| Dicroic Super Spot                                                                  | 2700K >> 2450±75K<br>3000K >> 2700±75K | Dicroic Spot / Medium / Flood / Wide Flood                                          | 2700K >> 2450±75K<br>3000K >> 2700±75K |
| Part Number:                                                                        |                                        | Part Number:                                                                        |                                        |
| 08.0797.00                                                                          |                                        | 08.0799.00                                                                          |                                        |
|  |                                        |  |                                        |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Light Strip




| Length           | CRI | CCT  | Initial Lumens | Delivered Lumens | Watts | Part Number | Finish       | Dimming Protocol                                                             |
|------------------|-----|------|----------------|------------------|-------|-------------|--------------|------------------------------------------------------------------------------|
| 11.8" (300 mm)   | 90  | 2700 | 558            | 244              | 6     | 03.8000     | ■ 14 = Black | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming |
| 23.6" (600 mm)   | 90  | 2700 | 1115           | 488              | 12    | 03.8001     |              |                                                                              |
| 35.4" (900 mm)   | 90  | 2700 | 1673           | 732              | 18    | 03.8002     |              |                                                                              |
| 47.2 " (1200 mm) | 90  | 2700 | 2230           | 976              | 24    | 03.8003     |              |                                                                              |
| 59" (1500 mm)    | 90  | 2700 | 2788           | 1220             | 30    | 03.8004     |              |                                                                              |
| Length           | CRI | CCT  | Initial Lumens | Delivered Lumens | Watts | Part Number | Finish       | Dimming Protocol                                                             |
| 11.8" (300 mm)   | 90  | 3000 | 590            | 258              | 6     | 03.8005     | ■ 14 = Black | A = Dimmable on Board<br>A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming |
| 23.6" (600 mm)   | 90  | 3000 | 1180           | 516              | 12    | 03.8006     |              |                                                                              |
| 35.4" (900 mm)   | 90  | 3000 | 1670           | 773              | 18    | 03.8007     |              |                                                                              |
| 47.2 " (1200 mm) | 90  | 3000 | 2360           | 1031             | 24    | 03.8008     |              |                                                                              |
| 59" (1500 mm)    | 90  | 3000 | 2950           | 1289             | 30    | 03.8009     |              |                                                                              |


The Tracking Magnet EVO Suspension Up&Down





High-tech LED lighting system for interior architecture

How to specify

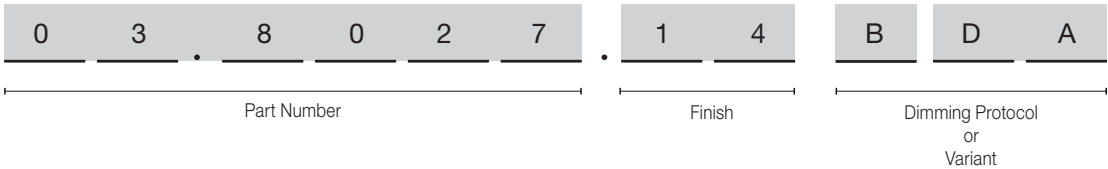

Anthony Spot Track

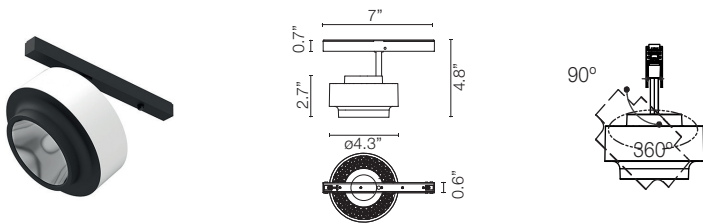


| CCT  | CRI | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish                                                                                                          | Dimming Protocol                                                                                        | Photometric                                                                                                                                                                                                                                                       |
|------|-----|----------------|------------------|-------|-------------|-------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3000 | 90  | 1730           | 1425             | 17.6  | 15°         | 03.8027     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Polished Silver</div> | <div>B = Dimmable on Board</div> <div>B1V = 0-10V, 10% Dimming</div> <div>BDA = DALI, 10% Dimming</div> | <div><div>Beam Angle: 15°<br/>h(m) E(lx) D(m)<br/>1 14285 0.27<br/>2 3571 0.54<br/>3 1587 0.81<br/>4 893 1.07<br/>5 571 1.34<br/>Luminous flux luminaire 1425 lm</div></div> |
| 2700 | 90  | 1620           | 1241             | 17.6  | 15°         | 03.8025     |                                                                                                                 |                                                                                                         | <div><div>Beam Angle: 15°<br/>h(m) E(lx) D(m)<br/>1 12442 0.27<br/>2 3110 0.54<br/>3 1382 0.81<br/>4 778 1.07<br/>5 498 1.34<br/>Luminous flux luminaire 1241 lm</div></div> |
| 3000 | 90  | 1730           | 1426             | 17.6  | 28°         | 03.8028     |                                                                                                                 |                                                                                                         | <div><div>Beam Angle: 28°<br/>h(m) E(lx) D(m)<br/>1 5799 0.49<br/>2 1450 0.98<br/>3 644 1.47<br/>4 362 1.97<br/>5 232 2.46<br/>Luminous flux luminaire 1399 lm</div></div>   |
| 2700 | 90  | 1620           | 1242             | 17.6  | 28°         | 03.8026     |                                                                                                                 |                                                                                                         | <div><div>Beam Angle: 28°<br/>h(m) E(lx) D(m)<br/>1 5145 0.49<br/>2 1286 0.98<br/>3 572 1.47<br/>4 322 1.97<br/>5 206 2.46<br/>Luminous flux luminaire 1242 lm</div></div>   |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Optional Accessories Anthony Spot

|                                                                                   |                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Honeycomb                                                                         | Elliptical Lens                                                                   | Flood Lens (28° Anthony Fixture + Flood Lens = 35°)                                 |
| Part Number:<br>08.8419.14A                                                       | Part Number:<br>08.8418.68A                                                       | Part Number:<br>08.0050.00                                                          |
|  |  |  |

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Multi Spot Mini How to Specify ex. 05.3550.14A / 05.3550.14ACB / 05.3550.14ADA / 05.3550.14A1V


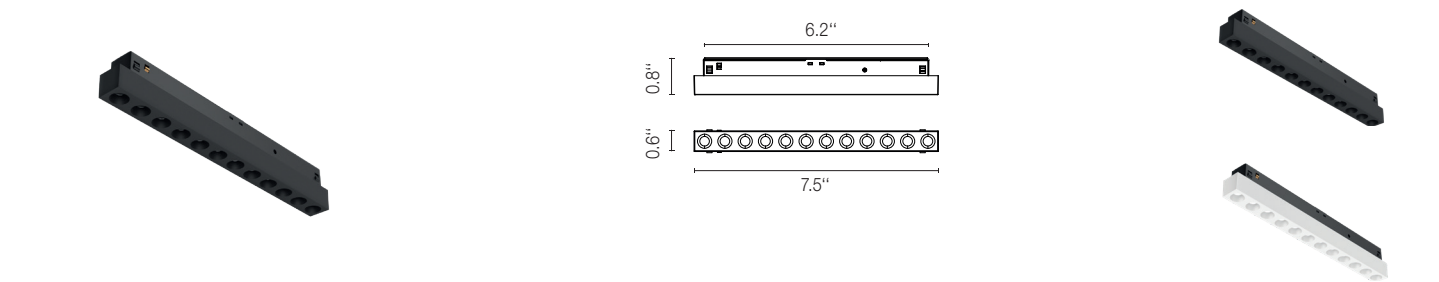



Table with 9 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Beam Spread, Part Number, Finish, and Dimming Protocol. It lists specifications for 2700K and 3000K color temperatures across different beam spreads (15°, 19°, 31°).

Photometric


Spot 15°




Medium 19°




Flood 31°



3000 K



3000 K



3000 K

