


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Anthony Spot Track

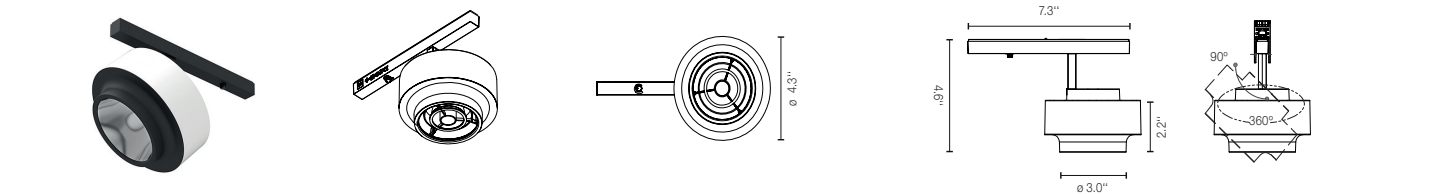

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																		
3000	90	1730	1425	16.5	15°	03.8027	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	<div>Dimmable on Board</div> <div>1V = 0-10V, 10% Dimming</div> <div>DA = DALI, 10% Dimming</div>	<div><p>Beam Angle: 15°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>14285</td><td>0.27</td></tr><tr><td>2</td><td>3571</td><td>0.54</td></tr><tr><td>3</td><td>1587</td><td>0.81</td></tr><tr><td>4</td><td>893</td><td>1.07</td></tr><tr><td>5</td><td>571</td><td>1.34</td></tr></tbody></table><p>Luminous flux luminaire 1425 lm</p></div>	h(m)	E(lx)	D(m)	1	14285	0.27	2	3571	0.54	3	1587	0.81	4	893	1.07	5	571	1.34
h(m)	E(lx)	D(m)																									
1	14285	0.27																									
2	3571	0.54																									
3	1587	0.81																									
4	893	1.07																									
5	571	1.34																									
2700	90	1620	1241	16.5	15°	03.8025	<div><p>Beam Angle: 15°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>12442</td><td>0.27</td></tr><tr><td>2</td><td>3110</td><td>0.54</td></tr><tr><td>3</td><td>1382</td><td>0.81</td></tr><tr><td>4</td><td>778</td><td>1.07</td></tr><tr><td>5</td><td>498</td><td>1.34</td></tr></tbody></table><p>Luminous flux luminaire 1241 lm</p></div>	h(m)	E(lx)	D(m)	1	12442	0.27	2	3110	0.54	3	1382	0.81	4	778	1.07	5	498	1.34		
h(m)	E(lx)	D(m)																									
1	12442	0.27																									
2	3110	0.54																									
3	1382	0.81																									
4	778	1.07																									
5	498	1.34																									
3000	90	1730	1426	16.5	32°	03.8028	<div><p>Beam Angle: 28°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5799</td><td>0.49</td></tr><tr><td>2</td><td>1450</td><td>0.98</td></tr><tr><td>3</td><td>644</td><td>1.47</td></tr><tr><td>4</td><td>362</td><td>1.97</td></tr><tr><td>5</td><td>232</td><td>2.46</td></tr></tbody></table><p>Luminous flux luminaire 1399 lm</p></div>	h(m)	E(lx)	D(m)	1	5799	0.49	2	1450	0.98	3	644	1.47	4	362	1.97	5	232	2.46		
h(m)	E(lx)	D(m)																									
1	5799	0.49																									
2	1450	0.98																									
3	644	1.47																									
4	362	1.97																									
5	232	2.46																									
2700	90	1620	1242	16.5	32°	03.8026	<div><p>Beam Angle: 28°</p><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5145</td><td>0.49</td></tr><tr><td>2</td><td>1286</td><td>0.98</td></tr><tr><td>3</td><td>572</td><td>1.47</td></tr><tr><td>4</td><td>322</td><td>1.97</td></tr><tr><td>5</td><td>206</td><td>2.46</td></tr></tbody></table><p>Luminous flux luminaire 1242 lm</p></div>	h(m)	E(lx)	D(m)	1	5145	0.49	2	1286	0.98	3	572	1.47	4	322	1.97	5	206	2.46		
h(m)	E(lx)	D(m)																									
1	5145	0.49																									
2	1286	0.98																									
3	572	1.47																									
4	322	1.97																									
5	206	2.46																									

Optional Accessories Anthony Spot

Honeycomb	Elliptical Lens	Flood Lens (28° Anthony Fixture + Flood Lens = 35°)
Part Number: 08.8419.14A	Part Number: 08.8418.68A	Part Number: 08.0050.00