

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Description

Fun with magnets and light. Simultaneously graphic and subtle, the Running Magnet is flexible, precise, and as creative as you. It is track lighting redesigned and elegantly refined. Light elements snap in place and connect automatically through the magic of magnets. Extruded aluminum housings create a clean 1-3/8-inch slot and preconfigured corners complete the system that can run up, around and across walls and ceilings. Finishes align perfectly, always, because Running Magnet can be easily cut on site (except Suspension Up&Down). Linear LED and accent fixtures, available in a variety of sizes, can be exchanged and repositioned quickly, without tools, with artistic results. The Running Magnet is perfect for retail displays where frequent changes are typical and absolute performance is mandatory.


Lamp

System Lamp Type	LED
Color Temperature	2700K, 3000K, *3500K, *4000K (See Notes)
Color Rendering	CRI90
Application	General Lighting / Accent lighting

Physical

Material	Aluminum
Ingress Protection Rating	IP20
Finishes	☒ 14 Black ☐ 40 White
Installation type	Ceiling Recessed.
Environment	Indoor
Field cuttable	Yes, at the end of a run

Recessed Installation

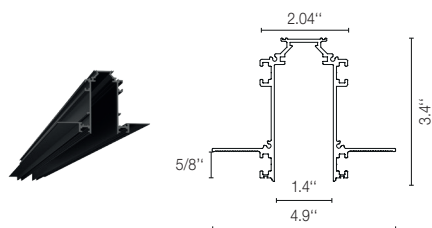

Light Modules



Certifications



Photometrics


For current IES files please visit arch.flosusa.com

Warranty


2 years from date of sale.

Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Driver Output Voltage	24V
Maximum Driver Wattage	Class 2 - 96W
Control	On fixture: Standard 0-10V dimming / DALI / On board

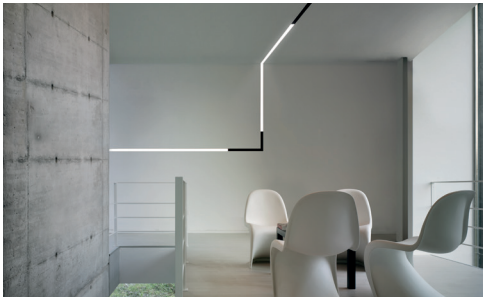

Recessed Installation

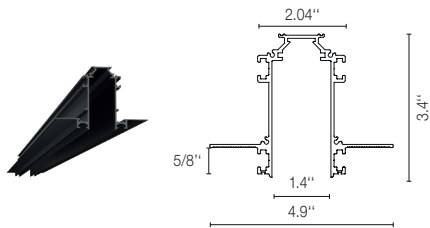

Light Modules



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Notes

End caps are included only with the Running Magnet feed profile.

EC to supply site cabling from driver to track location and site UL listed enclosure.

Wattage per linear foot is dependent upon quantity and type of light modules used.

Spots and linear luminaires available in DALI (individually addressable), and 0-10V (from 10% up to 100%) dimming.

0-10V Fixtures come from the factory set up at the lowest level 10% they always required a 0-10V signal to achieve the maximum output.

Trimless extruded aluminum track to be recessed in sheet rock ceilings and walls 5/8" thick, Also available in 1/2" Consult factory

All components required for the installation are included with the system with the exception of drivers and controllers.

Linear profiles available as feed profiles to connect to a driver and intermediate profiles to fill in remaining lengths.

All linear profiles are field cuttable at the end of a run.

Track can be powered through corners.


3500K , 4000K and other CCT available but not cataloged. Consult factory for additional color temperatures.

For Airtight instruction, consult factory.

Cable gauge Max Distance. From driver to end of the track section (ft) Max Distance. From driver to track. Considering 26ft track (ft)

Cable gauge	Max Distance. From driver to end of the track section (ft)	Max Distance. From driver to track. Considering 26ft track (ft)
#20 awg	28	2
#18 awg	35	9
#16 awg	45	19
#14 awg	58	32
#12 awg	72	46



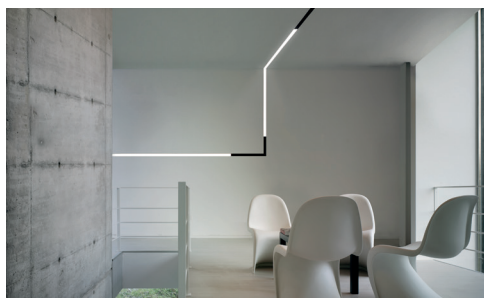

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

How To Specify

A. Select and position corners

1. Horizontal - Connect sections on flat surfaces (90° corner)
2. Inside - Transition from wall to ceiling (inside corner)
3. External - Turn outside corners for walls and soffits (270° corner)

B. Fill lengths between corners with Linear Housings

3.3', 4.9', 6.6' or 8.2' sections can be specified as feed or intermediate profiles. Profile can be easily cut to site to exact length and joined together.

C. Drivers

Quantity of drivers determined by total wattage or light elements in section (approximately one every 10 feet). Maximum driver distance is 15'. Locate drivers nearby. Dimming hardwires into profile, bypasses driver.



D. Select Spot heads

Linear strips are available in five nominal lengths:

1', 2', 3', 4' and 5'.

Individual units can be adjusted from 20-100% with a built-in dimming knob and DALI and 0-10V from 10-100%

Recessed Installation

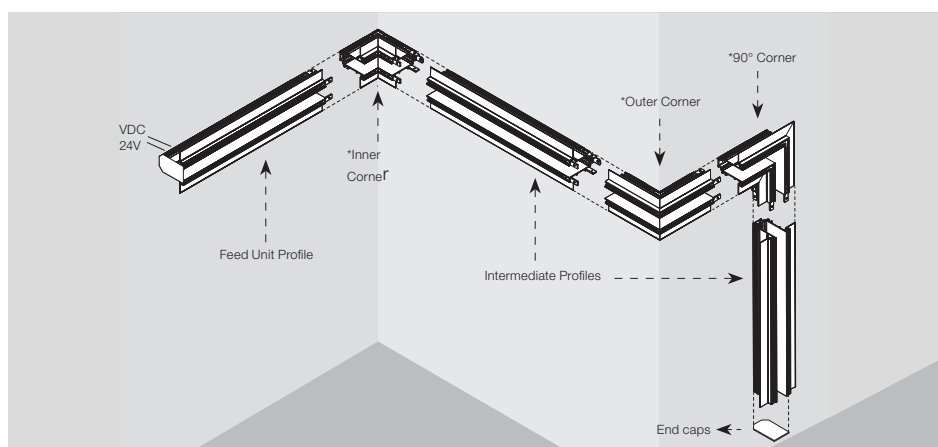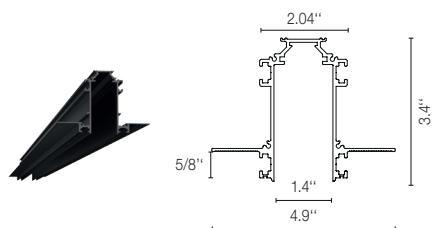

Light Modules



Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

For more information contact your representative or go to professional.flos.com/en-US/us/
©2026 Specifications and dimensions subject to change without notice. Issued 08.05.2026




The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Profile

The extruded aluminum housing creates a clean 1-3/8" slot that can be run up, around and across walls and ceilings. Vertical and horizontal corners complete the system. The magnetic luminaries are simply installed by insertion. Linear tracks are available in two versions: power feed profiles for connecting to a driver, and intermediate profiles. End caps and connection cables are included with each power feed profile. Internal foam for opening support should not be removed until after installation.

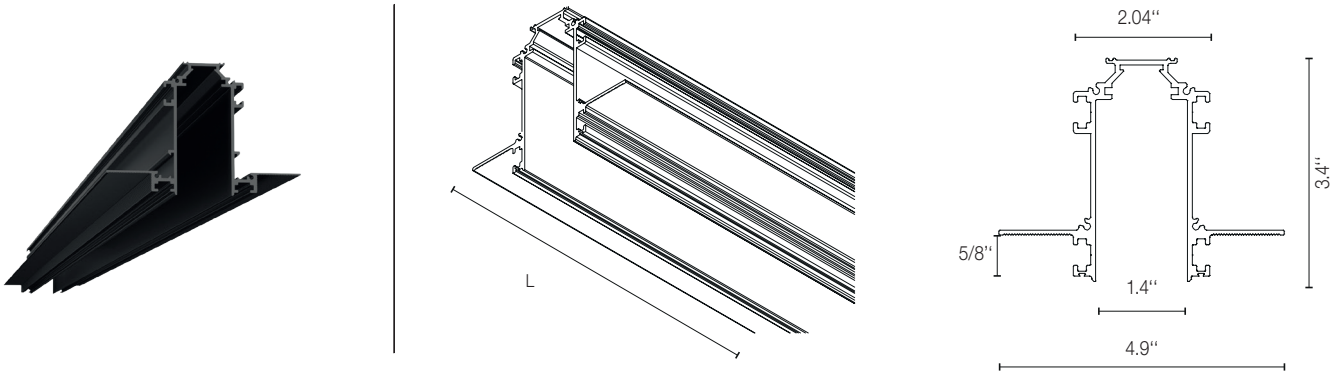

How to Specify ex. 06.1638.14.90

Length	Part Number Feed Profile	Part Number Intermediate Profile	Finish	Variant
39.4" (1m)	06.1638.14.90 06.1638.40.90	06.1643.14.90 06.1643.40.90	Black White	5/8" Ceiling thickness
59" (1.5m)	06.1639.14.90 06.1639.40.90	06.1644.14.90 06.1644.40.90		
78.7" (2m)	06.1640.14.90 06.1640.40.90	06.1645.14.90 06.1645.40.90		
98.4" (2.5m)	06.1641.14.90 06.1641.40.90	06.1646.14.90 06.1646.40.90		
118.11" (3m)	06.1642.14.90 06.1642.40.90	06.1647.14.90 06.1647.40.90		

Both profile types can be cut to different lengths in field.

Required Accesssory

End Cap kit (2 units)
Includes the End Feed connector. Required quantity of 1 per run.
End caps are included only with the Running Magnet feed profile.

Part Number:
08.8865.14A90







The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Powered Corners.




Power can continue through corner and can be fed from corner.

Horizontal 90° Corner. [5.9" x 5.9"] 5/8" Ceiling thickness	Inside Corner. [3.15" x 3.15"] 5/8" Ceiling thickness	Outside Corner. [5.9" x 5.9"] 5/8" Ceiling thickness
Part Number: ■ 06.1648.14.90	Part Number: ■ 06.1650.14.90	Part Number: ■ 06.1651.14.90
		
		

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Optional Profile Mounting Kits

Fixed Low-Clearance Mounting Kit (2 units).	Adjustable Ceiling Kits (1 unit)	
Part Number: 08.8866.14	Part Number: 08.8867.14UL	
		
		

Profile	Quantities Ceiling kit
39.37" / 59.06" [1000 mm/ 1500 mm]	2
78.74" / 98.42" [2000 mm/ 2500 mm]	3

The Running Magnet 2.0 Recessed


High-tech LED lighting system for interior architecture.

Dimming Controllers

Dimming Control Unit Box 24V 0-10V
Required for a 0-10V Dimming
installation. 1 DCU can control up to 25
fixtures

Part Number:




■ 08.0613.14A

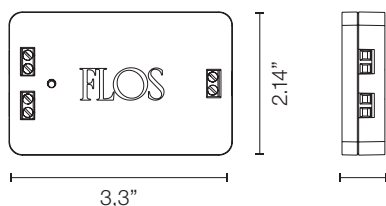

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.


Required Drivers

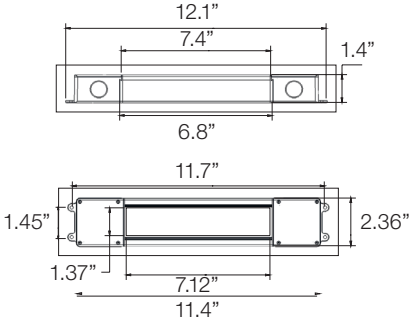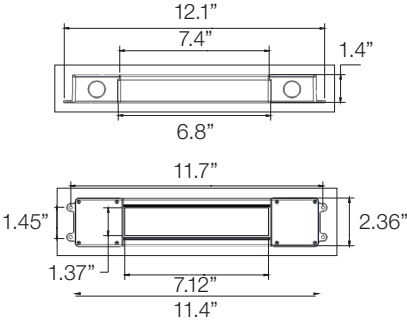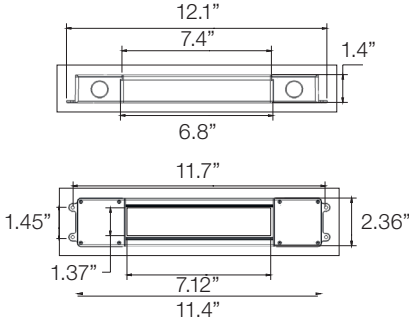LED power supply source for remote installation, 24V/96W, 120-277V, UL Listed	LED power supply source for remote installation, 24V/60W, 120-277V, UL Listed	LED power supply source for remote installation, 24V/30W, 120-277V, UL Listed
Part Number: LEDSB96W24V-NDM-D1	Part Number: LEDSB60W24V-NDM-D1	Part Number: LEDSB30W24V-NDM-D1
		
		

The Running Magnet 2.0 Recessed


High-tech LED lighting system for interior architecture.

How to specify

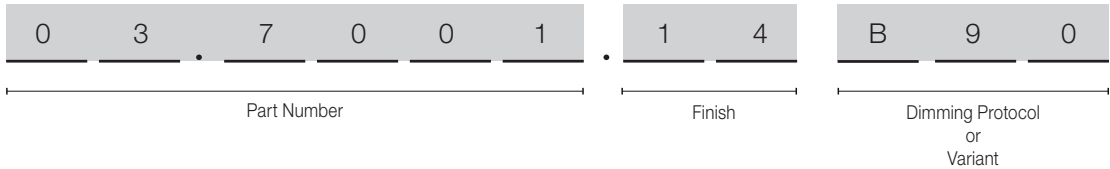

Light Strip Module HE

Linear High Efficiency LED can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture from 20-100%, DALI and 0-10V from 10-100%. Clear end caps included for continuous look when installing end-to-end.

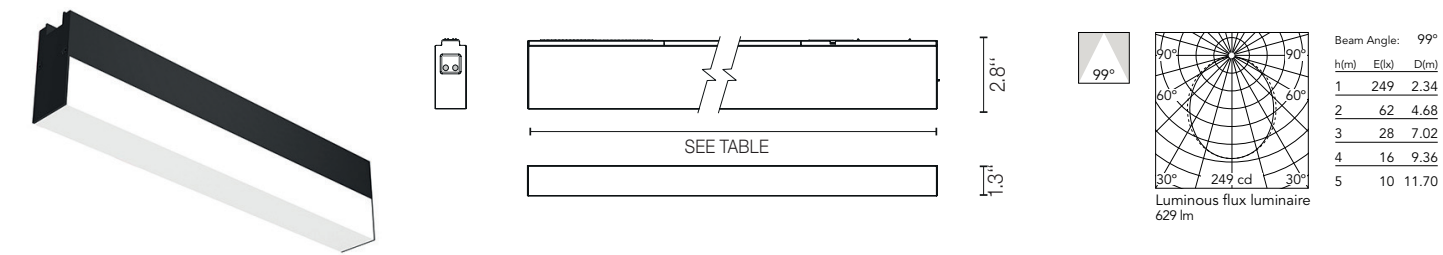

How to Specify		ex. 03.7001.14.90							
Light Strip Length	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
11.8" (300mm)	3000K	90	460lm	440lm	7.5W	105°	03.7001	 14 = Black	B90 = Dimmable on board BDD = DALI B9V = 0-10V
23.6" (600mm)	3000K	90	920lm	880lm	15W	105°	03.7003		
35.4" (900mm)	3000K	90	1380lm	1320lm	22.5W	105°	03.7005		
47.2" (1200mm)	3000K	90	1840lm	1760lm	30W	105°	03.7007		


How to Specify		ex. 03.7000.14.90							
Light Strip Length	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
11.8" (300mm)	2700K	90	435lm	425lm	7.5W	105°	03.7000	 14 = Black	B90 = Dimmable on board BDD = DALI B9V = 0-10V
23.6" (600mm)	2700K	90	870lm	833lm	15W	105°	03.7002		
35.4" (900mm)	2700K	90	1305lm	1249lm	22.5W	105°	03.7004		
47.2" (1200mm)	2700K	90	1740lm	1665lm	30W	105°	03.7006		

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Spot Module

Accent LED Spot modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture DALI from 1-100% and 0-10V from 10-100%. Standard beam spread is 14°. Additional interchangeable lenses available in 23° and 33°, and 10° x 40° elliptical beam spread.

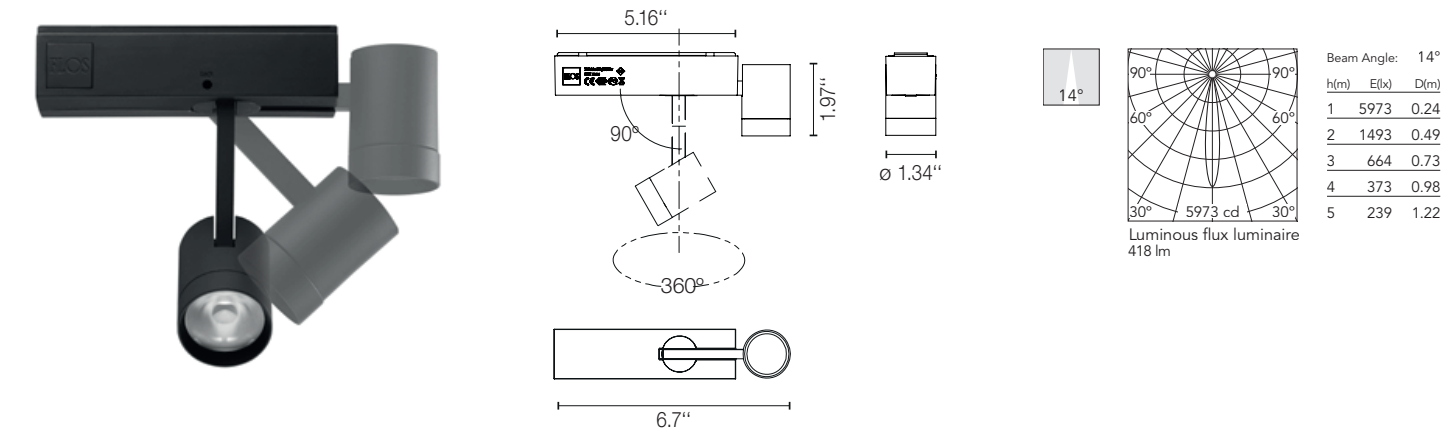

How to Specify		ex. 03.6302.14A90						
CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
2700K	90	550lm	404lm	8W	14°	03.6303	■ 14 = Black	B90 = Dimmable on board
3000K	90	600lm	418lm	8W	14°	03.6302		CDD = DALI B9V = 0-10V

Optional Accessories

Flood Lens Accessory 23° Field Changeable	Wide Flood Lens Accessory 33° Field Changeable	Elliptical Lens Accessory Field Changeable 10° x 40°	Extra long snoot for added shielding in aluminum with black finish (does not protude from channel when tucked up into housing)
Part Number: 08.8760.00	Part Number: 08.8761.00	Part Number: 08.8759.00	Part Number: 08.8427.14

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Multi Spot 4

4 accent Spot LED module can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically with magnets. Built-in dimming knob dims fixture (from 20-100%), DALI and 0-10V (from 10-100%). Standard beam spread is 11° additional interchangeable lenses available in 20° and 30°, and elliptical beam spread.

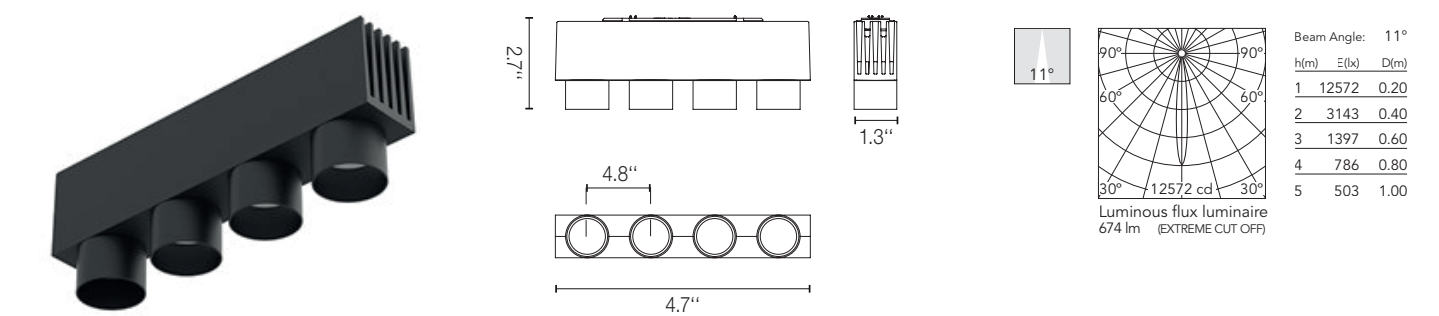


Table with 9 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Beam Spread, Part Number, Finish, Dimming Protocol. It lists two configurations: 3000K/90 and 2700K/90, both with 4 X 210lm and 10W. Part numbers are 03.6306 and 03.6305. Finish is 14 = Black. Dimming protocols include C90, CDD, and C9V.

Optional Accessories


Table with 3 columns for optional accessories: Flood Lens Accessory 20°, Wide Flood Lens Accessory 30°, and Elliptical Lens Accessory. Each column includes a description, part number (08.8760.00, 08.8761.00, 08.8759.00), and an image of the respective lens.

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Spot 120

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.

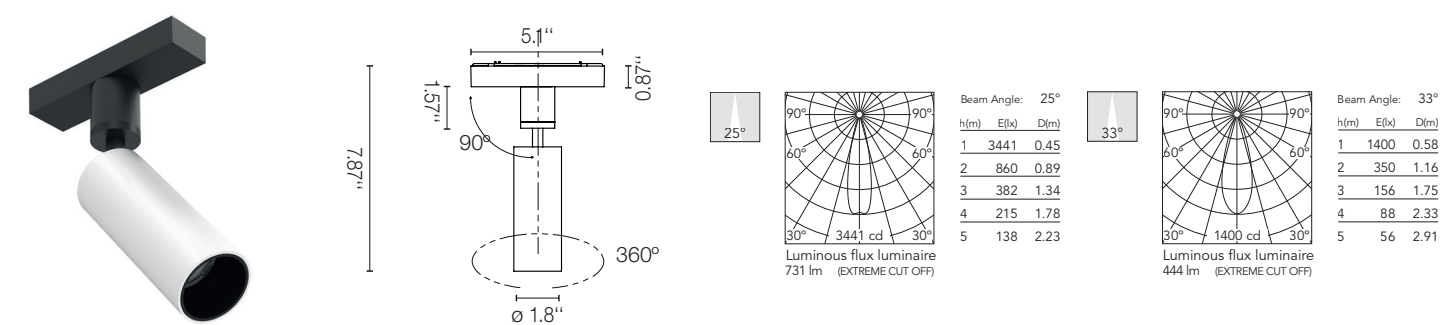

How to Specify ex. 03.6285.14.90

CCT	CRI	Initial Lumens	Delivered Lumens	Watts*	Beam Spread	Part Number	Finish	Part Number 0-10V Dimming
2700K	90	985 lm	773 lm	12.5W	25°	03.6285	■ 14 = Black □ 40 = White	C90 = Dimmable on board (12.5W)
3000K	90	1060 lm	851 lm			03.6284		
2700K	90	985 lm	448 lm	12.5W	33°	03.6286		
3000K	90	1060 lm	493 lm			03.6287		


CCT	CRI	Initial Lumens	Delivered Lumens	Watts*	Beam Spread	Part Number	Finish	Part Number 0-10V Dimming
2700K	90	985 lm	773 lm	14W	25°	03.6285	■ 14 = Black □ 40 = White	C9V = 0-10V (14W) CDD = DALI (14W)
3000K	90	1060 lm	851 lm			03.6284		
2700K	90	985 lm	448 lm	14W	33°	03.6286		
3000K	90	1060 lm	493 lm			03.6287		

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Light Shadow

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.

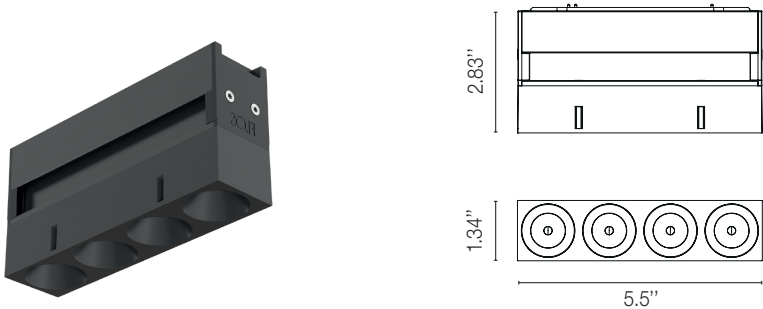

How to Specify ex. 03.8949.14C90

CCT	CRI	Initial Lumens*	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Dimming Protocol
2700K	90	1192 lm	10.8W	12°	03.8949	40 = White 14 = Black	Black	C90 = Dimmable on board CDD = DALI C9V = 0-10V
					03.8948		White	
					05.1800		Steel	
					05.1801		Bronze	
					05.1802			
3000K	90	1272 lm	10.8W	12°	03.8953	40 = White 14 = Black	Black	
					03.8952		White	
					05.1805		Steel	
					05.1806		Bronze	
					05.1807			
2700K	90	1192 lm	10.8W	23°	03.9621	40 = White 14 = Black	Black	
					03.9620		White	
					05.1810		Steel	
					05.1811		Bronze	
					05.1812			
3000K	90	1272 lm	10.8W	23°	03.9631	40 = White 14 = Black	Black	
					03.9630		White	
					05.1815		Steel	
					05.1816		Bronze	
					05.1817			

Delivered Lumens from 1020 lm to 1131 lm varies depending on the reflector finish, beam angle and CCT

The Running Magnet 2.0 Recessed


High-tech LED lighting system for interior architecture.

How to Specify ex. 03.8949.14C90

CCT	CRI	Initial Lumens*	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Dimming Protocol
2700K	90	1192 lm	10.8W	29°	03.9626	40 = White 14 = Black	Black	C90 = Dimmable on board CDD = DALI C9V = 0-10V
					03.9625		White	
					05.1820		Steel	
					05.1821		Bronze	
					05.1822			
3000K	90	1272 lm	10.8W	29°	03.9636	40 = White 14 = Black	Black	
					03.9635		White	
					05.1825		Steel	
					05.1826		Bronze	
					05.1827			
2700K	90	1192 lm	10.8W	45°	03.9661	40 = White 14 = Black	Black	
					03.9660		White	
					05.1830		Steel	
					05.1831		Bronze	
					05.1832			
3000K	90	1272 lm	10.8W	45°	03.9665	40 = White 14 = Black	Black	
					03.9664		White	
					05.1835		Steel	
					05.1836		Bronze	
					05.1837			

* Delivered Lumens from 1020 lm to 1131 lm varies depending on the reflector finish, beam angle and CCT

Photometrics

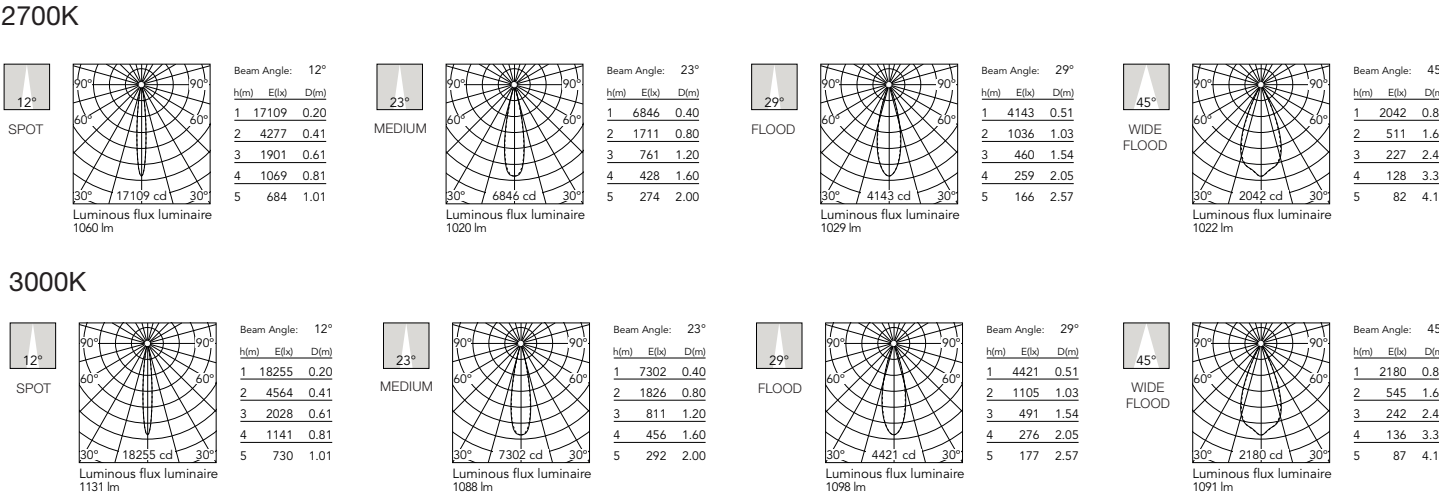

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Light Shadow Wall-Washer

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.





Table with 3 columns: h(m), E(lx), D(m). Rows show beam spread data for 2700K at 24° beam angle.






Table with 3 columns: h(m), E(lx), D(m). Rows show beam spread data for 3000K at 24° beam angle.

How to Specify ex. 03.9905.14C90

Table with 9 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Beam Angle, Part Number, Exterior Finish, Dimming Protocol. It lists specifications for 2700K and 3000K models.

How To Install

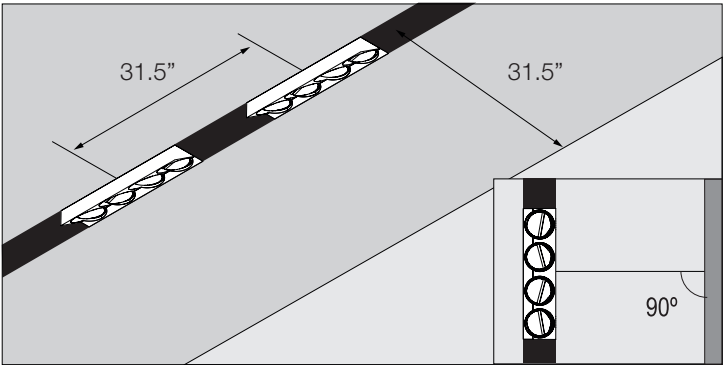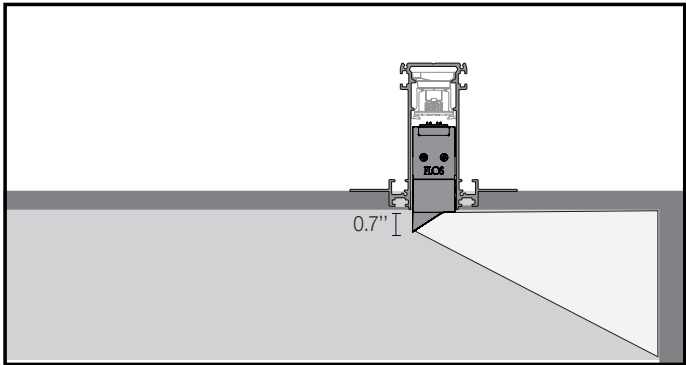


The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Mini Glo-ball

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

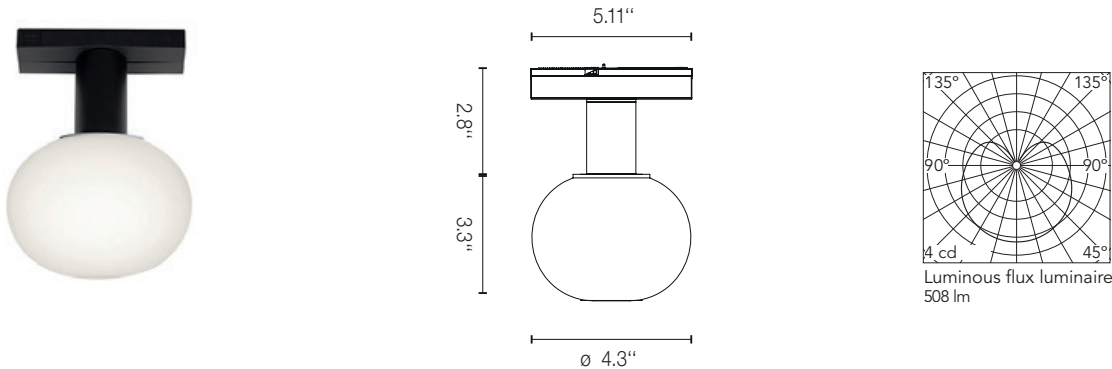

How to Specify ex. 03.6260.30B90



	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
Mini Glo - Ball	3000K	80	880lm	528lm	7W	03.6261	■ 14 = Black	B90 = Dimmable on board
	2700K	80	800lm	488lm	7W	03.6260		.DD = DALI .9V = 0-10V

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Mini Glo - Ball Suspension

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

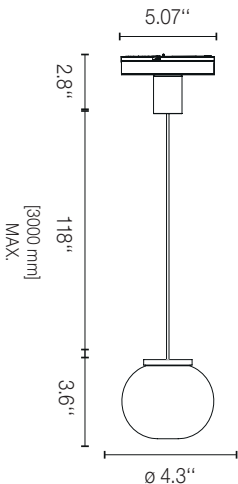

How to Specify ex. 03.6263.30B90



	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Part Number	Finish	Dimming Protocol
Mini Glo - Ball Suspension	3000K	80	440lm	271lm	3.5W	03.6263	■ 14 = Black	B90 = Dimmable on board
	2700K	80	400lm	259lm	3.5W	03.6262		ADD = DALI .9V = 0-10V

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Find Me Suspension

Decorative modules can be rapidly exchanged and repositioned without tools. Light elements are quick to position and connect automatically through the magic of magnets. Built-in dimming knob allows fixture to dim from 20-100%, DALI and 0-10V from 10-100%.

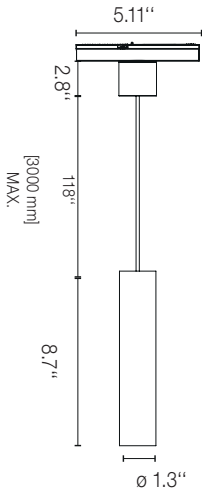

Luminous flux luminaire
365 lm (EXTREME CUT OFF)

Beam Angle: 14°		
h(m)	E(lx)	D(m)
1	4881	0.24
2	1220	0.49
3	542	0.73
4	305	0.97
5	195	1.21

How to Specify ex. 03.6273.30C90

	CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
Find Me Suspension	3000K	90	600	365lm	8W	14°	03.6273	☐ 30 = White ☒ 14 = Black ☐ 06 = Chrome	D90 = Dimmable on board EDD = DALI D9V = 0-10V
	2700K	90	560	344lm	8W	14°	03.6272		

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Small - High Efficiency

Luminaire for use on The Running Magnet system. High-efficiency light source. This can rotate by 360° on the axis of its rear arm to reach any position relative to the track (from parallel to perpendicular). UGR<19. EN12464 - cd/m² @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m.

Technical drawing showing dimensions (11.02", 3.93", 5.07", 3.97", 0.5", 1.1") and finish options: All White, White, Black, Anodized Silver.

How to Specify ex. 05.6420..40

Table with 8 columns: CCT, CRI, Initial Lumens, Part Number, Finish, Beam Angle, Watts, Dimming Protocol. Rows include specifications for 3000K, 3500K, and 4000K color temperatures.

* For "All White" Finish

Photometrics Workmates Small High Efficiency

ALL WHITE

Photometric data for 3000K, 3500K, and 4000K. Includes beam angle (76°), wide flood diagrams, and tables of luminous flux and illuminance at various distances.

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Small - High Efficiency

How to Specify

ex. 05.5920..40


CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	1260 lm	05.6425	☒ 40.78 = All White	Oval 72	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3500K	90	1271 lm	05.6426	☒ 40.78 = All White	Oval 72	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
4000K	90	1289 lm	05.6427	☒ 40.78 = All White	Oval 72	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3000K	90	1260 lm	05.5920	☒ 40.78 = All White	High Comfort 66	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	High Comfort 66	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3500K	90	1271 lm	05.5921	☒ 40.78 = All White	High Comfort 66	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	High Comfort 66	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
4000K	90	1299 lm	05.5922	☒ 40.78 = All White	High Comfort 66	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	High Comfort 66	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi

* For "All White" Finish


Photometrics Workmates Small High Efficiency

ALL WHITE





3000K



3500K



4000K

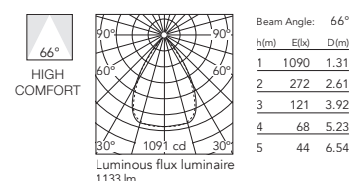


The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Small - Full Spectrum

Luminaire for use on The Running Magnet system. High-quality colour rendering Full Spectrum light source. This can rotate by 360° on the axis of its rear arm to reach any position relative to the track (from parallel to perpendicular). UGR<19. EN12464 - cd/m² @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m.



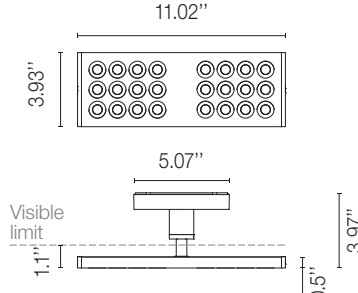



☒ All White

☐ White

☐ Black

☐ Anodized Silver

How to Specify ex. 05.6430..40

CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	934 lm	05.6430	 40.78 = All White	WF 76	10W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	WF 75		
				 14 = Black			
				 AP = Aluminized Silver			
3500K	90	942 lm	05.6431	 40.78 = All White	WF 76	10W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	WF 75		
				 14 = Black			
				 AP = Aluminized Silver			
4000K	90	950 lm	05.6432	 40.78 = All White	WF 76	10W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	WF 75		
				 14 = Black			
				 AP = Aluminized Silver			


* For "All White" Finish

Photometrics Workmates Small Full Spectrum

ALL WHITE

3000K






Beam Angle: 76°

h(m)	E(lx)	D(m)
1	490	1.55
2	122	3.10
3	54	4.66
4	31	6.21
5	20	7.76

Luminous flux luminaire
758 lm

3500K






Beam Angle: 76°

h(m)	E(lx)	D(m)
1	494	1.55
2	123	3.10
3	55	4.66
4	31	6.21
5	20	7.76

Luminous flux luminaire
764 lm

4000K





Beam Angle: 76°

h(m)	E(lx)	D(m)
1	498	1.55
2	125	3.10
3	55	4.66
4	31	6.21
5	20	7.76

Luminous flux luminaire
771 lm

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Small - Full Spectrum

How to Specify

ex. 05.5930..40

CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	934 lm	05.6435	☒ 40.78 = All White	Oval 72	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3500K	90	942 lm	05.6436	☒ 40.78 = All White	Oval 72	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
4000K	90	950 lm	05.6437	☒ 40.78 = All White	Oval 72	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3000K	90	934 lm	05.5930	☒ 40.78 = All White	High Comfort 66	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White		10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3500K	90	945 lm	05.5931	☒ 40.78 = All White	High Comfort 66	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White		10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
4000K	90	963 lm	05.5932	☒ 40.78 = All White	High Comfort 66	10W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White		10.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi

* For "All White" Finish


Photometrics Workmates Small Full Spectrum

ALL WHITE

3000K



OVAL



Beam Angle: 72°


h(m)	E(lx)	D(m)
1	469	1.45
2	117	2.89
3	52	4.34
4	29	5.78
5	19	7.23

Luminous flux luminaire 737 lm

3500K



OVAL



Beam Angle: 72°


h(m)	E(lx)	D(m)
1	473	1.45
2	118	2.89
3	53	4.34
4	30	5.78
5	19	7.23

Luminous flux luminaire 743 lm

4000K



OVAL




Beam Angle: 72°

h(m)	E(lx)	D(m)
1	478	1.45
2	119	2.89
3	53	4.34
4	30	5.78
5	19	7.23

Luminous flux luminaire 750 lm



HIGH COMFORT




Beam Angle: 66°

h(m)	E(lx)	D(m)
1	808	1.31
2	202	2.61
3	90	3.92
4	51	5.23
5	32	6.54

Luminous flux luminaire 840 lm



HIGH COMFORT




Beam Angle: 66°

h(m)	E(lx)	D(m)
1	819	1.31
2	205	2.61
3	91	3.92
4	51	5.23
5	33	6.54

Luminous flux luminaire 851 lm



HIGH COMFORT



Beam Angle: 66°

h(m)	E(lx)	D(m)
1	836	1.31
2	209	2.61
3	93	3.92
4	52	5.23
5	33	6.54


Luminous flux luminaire 869 lm

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Large - High Efficiency

Luminaire for use on The Running Magnet system. High-efficiency light source. This can rotate by 360° on the axis of its rear arm to reach any position relative to the track (from parallel to perpendicular). UGR<19. EN12464 - cd/m² @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m.

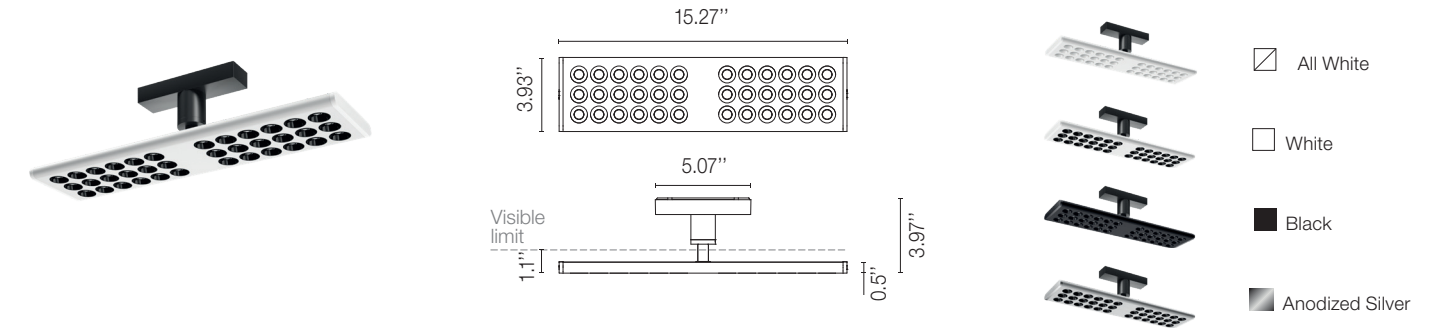


How to Specify ex. 05.6440..40

CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	1682 lm	05.6440	40.78 = All White	WF 74	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				40 = White	WF 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				14 = Black			
				AP = Aluminized Silver			
3500K	90	1707 lm	05.6441	40.78 = All White	WF 74	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				40 = White	WF 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				14 = Black			
				AP = Aluminized Silver			
4000K	90	1732 lm	05.6442	40.78 = All White	WF 74	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				40 = White	WF 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				14 = Black			
				AP = Aluminized Silver			

* For "All White" Finish

Photometrics Workmates Small High Efficiency

ALL WHITE

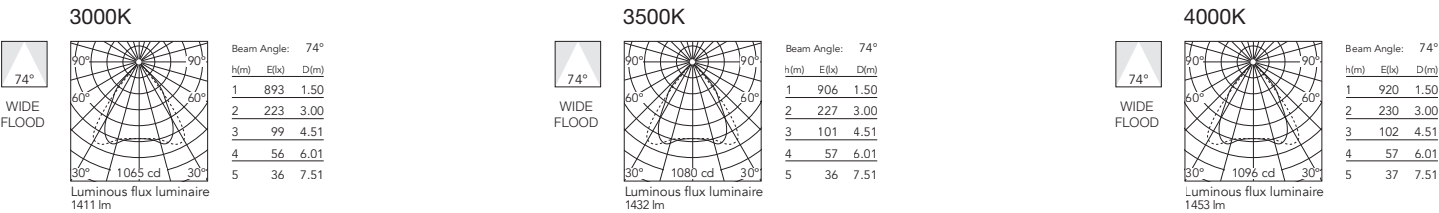

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Large - High Efficiency

How to Specify

ex. 05.6440..40


CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	1682 lm	05.6445	 40.78 = All White	Oval 72	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	Oval 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				 14 = Black			
				 AP = Aluminized Silver			
3500K	90	1707 lm	05.6446	 40.78 = All White	Oval 72	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	Oval 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				 14 = Black			
				 AP = Aluminized Silver			
4000K	90	1732 lm	05.6447	 40.78 = All White	Oval 72	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	Oval 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				 14 = Black			
				 AP = Aluminized Silver			
3000K	90	1682 lm	05.5940	 40.78 = All White	High Comfort 66	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White		13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				 14 = Black			
				 AP = Aluminized Silver			
3500K	90	1707 lm	05.5941	 40.78 = All White	High Comfort 66	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White		13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				 14 = Black			
				 AP = Aluminized Silver			
4000K	90	1732 lm	05.5942	 40.78 = All White	High Comfort 66	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White		13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
				 14 = Black			
				 AP = Aluminized Silver			

Photometrics Workmates Small High Efficiency


* For "All White" Finish

ALL WHITE





3000K



3500K



4000K




The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Large - Full Spectrum

Luminaire for use on The Running Magnet system. High-quality colour rendering Full Spectrum light source. This can rotate by 360° on the axis of its rear arm to reach any position relative to the track (from parallel to perpendicular). UGR<19. EN12464 - cd/m² @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m.

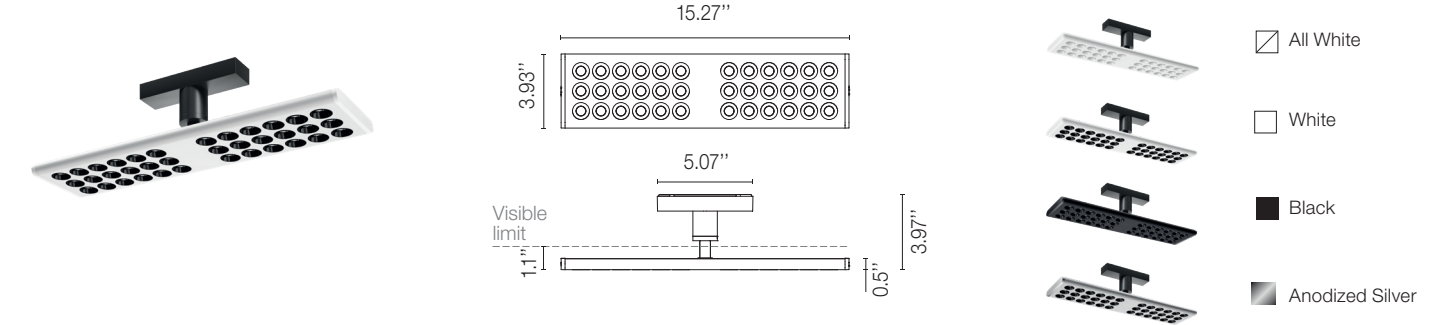


How to Specify ex. 05.6450..40

CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	1245 lm	05.6450	 40.78 = All White	WF 75	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	WF 74		
				 14 = Black			
				 AP = Aluminized Silver			
3500K	90	1256 lm	05.6451	 40.78 = All White	WF 75	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	WF 74		
				 14 = Black			
				 AP = Aluminized Silver			
4000K	90	1266 lm	05.6452	 40.78 = All White	WF 75	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				 40 = White	WF 74		
				 14 = Black			
				 AP = Aluminized Silver			

* For "All White" Finish

Photometrics Workmates Small Full Spectrum

ALL WHITE

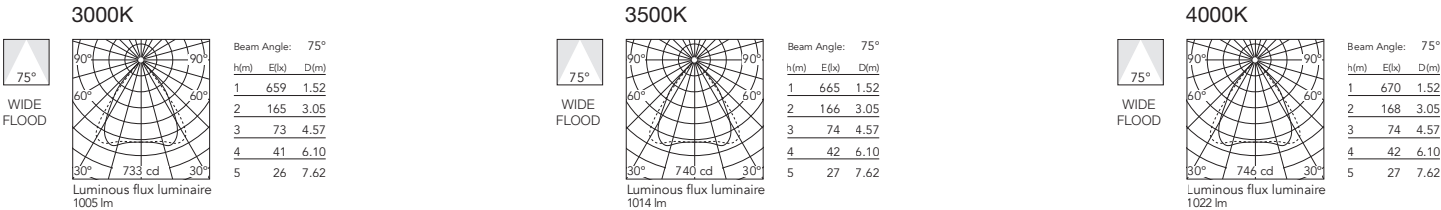

The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Workmates Large - Full Spectrum

How to Specify

ex. 05.6450..40


CCT	CRI	Initial Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
3000K	90	1245 lm	05.6455	☒ 40.78 = All White	Oval 72	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3500K	90	1256 lm	05.6456	☒ 40.78 = All White	Oval 72	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
4000K	90	1266 lm	05.6457	☒ 40.78 = All White	Oval 72	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White	Oval 71	13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3000K	90	1245 lm	05.5950	☒ 40.78 = All White	High Comfort 66	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White		13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
3500K	90	1256 lm	05.5951	☒ 40.78 = All White	High Comfort 66	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White		13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi
4000K	90	1266 lm	05.5952	☒ 40.78 = All White	High Comfort 66	12.5W	• Non Dimmable • 1V / RX* = 0-10V
				☐ 40 = White		13.5W	• DA / YU* = Dali 2 • CB / C6* = Casambi

* For "All White" Finish


Photometrics Workmates Small Full Spectrum

ALL WHITE





3000K



3500K



4000K




The Running Magnet 2.0 Recessed

High-tech LED lighting system for interior architecture.

Light Shadow Spot 30

LED accent lighting module for installation in The Running Magnet system. For wireless control of luminaires, please select Casambi integrated versions. Accessories available, (honeycomb and CCT dichroic filters).

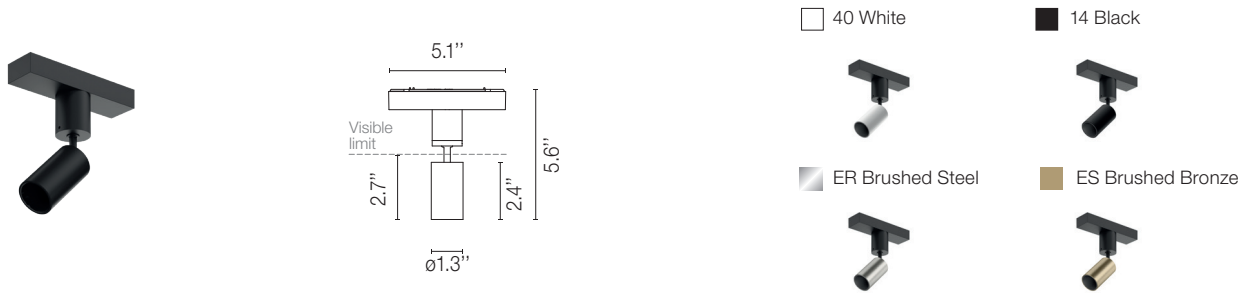

How to Specify ex. 05.9100.ERA


CCT	CRI	Initial Lumens	Delivered Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
2700K	90	298 lm	253 lm	05.9100	40 White 14 Black ER Brushed Steel ES Brushed Bronze	11	4W	- A = On Board Dimmer - ADA = Dali 2 - A1V = 1-10V - ACB = Casambi Integrated
2700K	90		257 lm	05.9101		22		
2700K	90		246 lm	05.9102		29		
2700K	90		246 lm	05.9103		43		
3000K	90	318 lm	270 lm	05.9105	40 White 14 Black ER Brushed Steel ES Brushed Bronze	11	4W	- A = On Board Dimmer - ADA = Dali 2 - A1V = 1-10V - ACB = Casambi Integrated
3000K	90		274 lm	05.9106		22		
3000K	90		263 lm	05.9107		29		
3000K	90		262 lm	05.9108		43		

The Running Magnet 2.0 Recessed


High-tech LED lighting system for interior architecture.

Photometrics

2700K

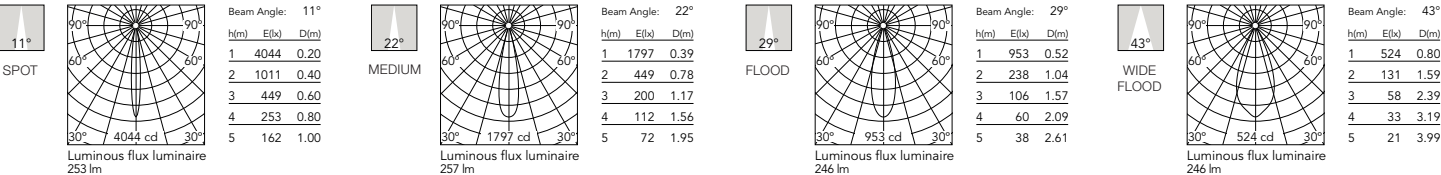

3000K

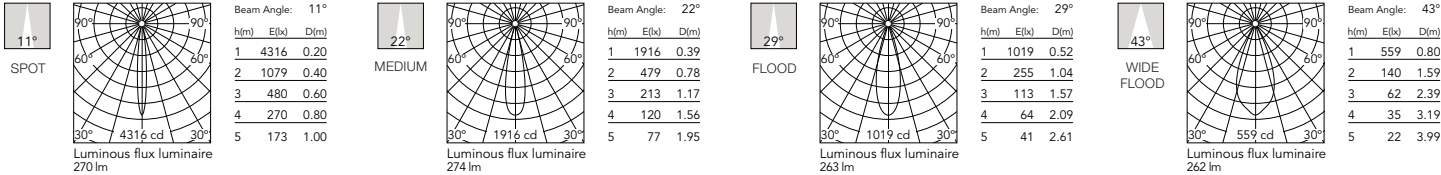


Optional Accessories

Honeycomb	CCT Increaser Filter D58 2700K >> 3125±75K 3000K >> 3600±75K	CCT Decreaser Filter D12 2700K >> 2450±75K 3000K >> 2700±75K
Part Number: 08.0790.00	Part Number: 08.0791.00	Part Number: 08.0792.00
		

The Running Magnet 2.0 Recessed


High-tech LED lighting system for interior architecture.

How to specify

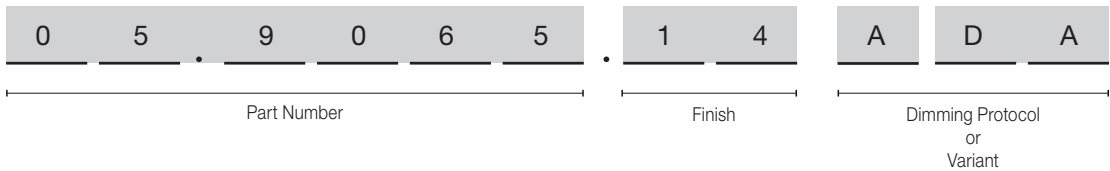

Light Shadow Spot 45

LED accent lighting module for installation in The Running Magnet system. For wireless control of luminaires, please select Casambi integrated versions. Accessories available, (honeycomb and CCT dichroic filters).



How to Specify ex. 05.9130.ERB


CCT	CRI	Initial Lumens	Delivered Lumens	Part Number	Finish	Beam Angle	Watts	Dimming Protocol
2700K	90	756 lm	650 lm	05.9130	40A White 14A Black ERA Brushed Steel ESA Brushed Bronze	15	10W	- On Board Dimmer - DA = Dali 2 1V = 1-10V - CB = Casambi Integrated
2700K	90		645 lm	05.9131		21		
2700K	90		646 lm	05.9132		31		
3000K	90	799 lm	650 lm	05.9135	40A White 14A Black ERA Brushed Steel ESA Brushed Bronze	15	10W	- On Board Dimmer - DA = Dali 2 1V = 1-10V - CB = Casambi Integrated
3000K	90		645 lm	05.9136		21		
3000K	90		646 lm	05.9137		31		

The Running Magnet 2.0 Recessed


High-tech LED lighting system for interior architecture.

Photometrics

2700K

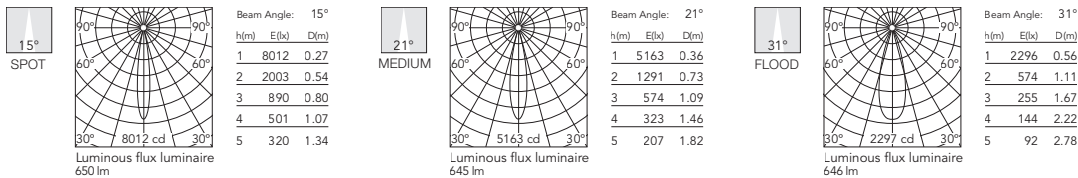

3000K

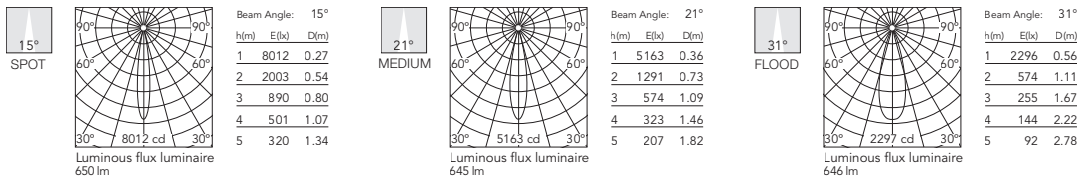

Optional Accessories

Honeycomb	CCT Increaser Filter D58	CCT Decreaser Filter D12
	2700K >> 3125±75K 3000K >> 3600±75K	2700K >> 2450±75K 3000K >> 2700±75K
Part Number: 08.0793.00	Part Number: 08.0794.00	Part Number: 08.0795.00