

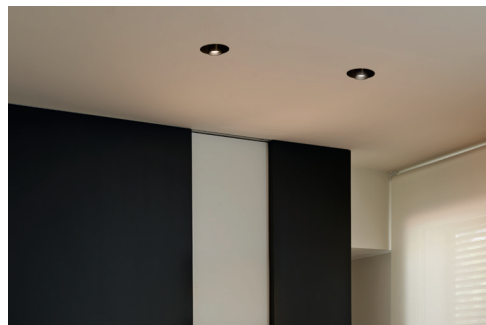


Johnny 120 (4.7") 1L Round

Ceiling Recessed Trimmed / Trimless



Dimensions

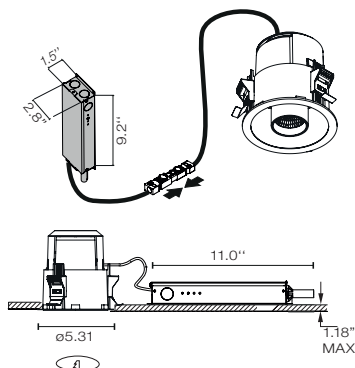

Certifications



Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Description

LED luminaire for recessed mounting into plasterboard ceilings. Illumination system consisting of one or two adjustable lights in a recessed version (trimmed or trimless) or in a semi recessed version. Available in two sizes: 80 mm (3.2") and 120 mm (4.7") in round and square versions. The Johnny 120 is supplied with two frame rings (black and white), which should be fitted to the product if a trimmed version is required, or without, if a Trimless version is required. An exclusive, easy and adjustable system that enables an accurate adjustment of the light beam. The Trimless Ø80 mm (3.2") version has an exclusive Fast&Perfect installation tool.

Lamp

Lamps Type	LED ARRAY
Wattage	18W
Output Nominal	1770 lm, 1870 lm
Color Temperature	2700K, 3000K
Color rendering	CRI 90

Optical

Beam Angle	13° / 22° / 41°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Aiming	Adjustable
Weight	1.43 Lbs
Ingress Protection Rating	IP20

Finishes


☐ 40 White

☒ 14 Black



Installation type	Ceiling Recessed
-------------------	------------------

Environment	Indoor dry location
-------------	---------------------

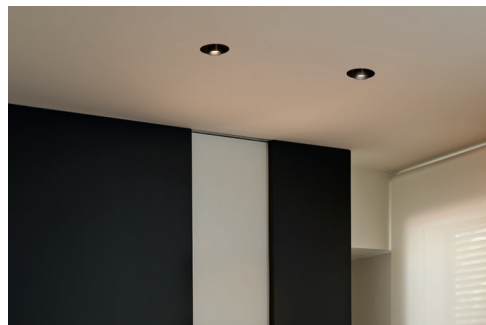

Johnny 120 (4.7'') 1L Round

Ceiling Recessed Trimmed / Trimless



Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Remote included

Performance

Maximum delivered output	284 lm / 378 lm
Efficacy	62 lm/W / 64.3 lm/W

Dimensions

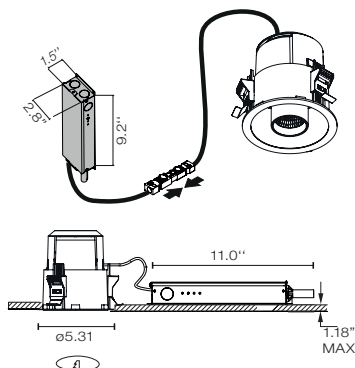

Notes

Recessed luminaire for LED light source.

Pre-installation frame box must be ordered separately.

Maximum rotation 360°

Maximum tilt angle 40°

Certifications



Photometrics

For current IES files please visit
architectural.flosusa.com



Warranty

2 years from date of sale.

Johnny 120 (4.7") 1L Round

Ceiling Recessed Trimmed / Trimless

How to order Johnny 120 Recessed ex. 03.0741.40.UL + 08.0505.00

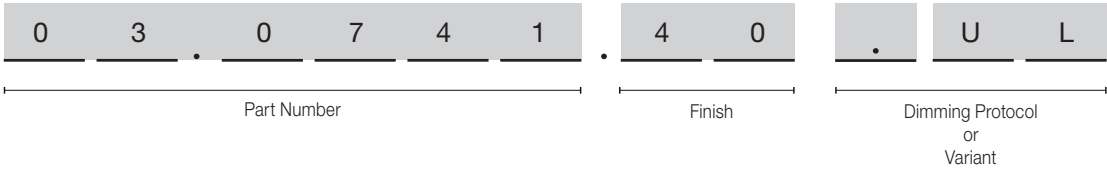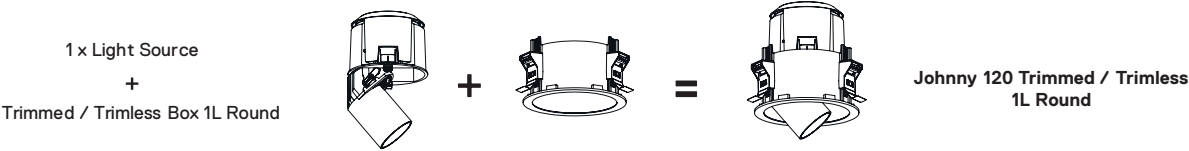

How to Specify ex. 03.0741.40.UL

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Finish	Variant
2700	90	1770	18	13°	03.0741	40 = White 14 = Black	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
3000	90	1870	18		03.0740		
2700	90	1770	18	22°	03.0743	40 = White 14 = Black	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
3000	90	1870	18		03.0742		
2700	90	1770	18	41°	03.0745	40 = White 14 = Black	GT = Splice box, 10% Dim, ELV, 120V UL = Splice box, 1% Dim, 1-10V, 120V 7U = Splice box, 1% Dim, 1-10V, 277V
3000	90	1870	18		03.0744		

Johnny 120 (4.7") 1L Round


Ceiling Recessed Trimmed / Trimless

Photometrics


Table with 6 columns: Color Temperature (2700K, 3000K), Beam Type (SPOT, MEDIUM, FLOOD), Beam Angle, and Photometric Data (h(m), E(lx), D(m), Luminous flux, etc.).

Required Box 1L Round

Johnny 120 TRIMMED / TRIMLESS
BOX 1L ROUND Black
Black and White trimmed ring Included
08.0505.00

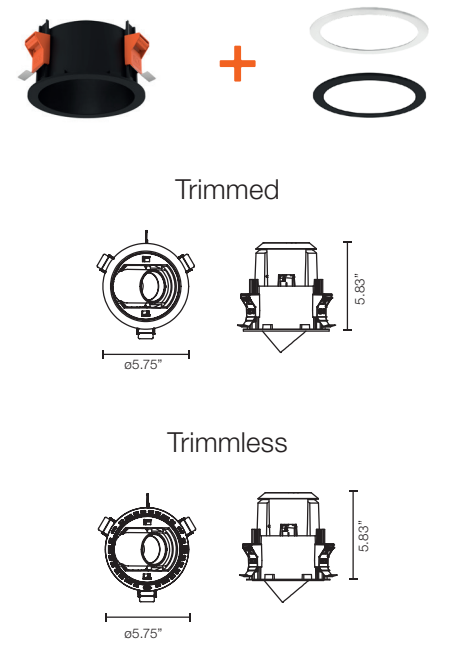



Johnny 120 TRIMMED / TRIMLESS
BOX 1L ROUND White
White trimmed ring Included
08.0555.00

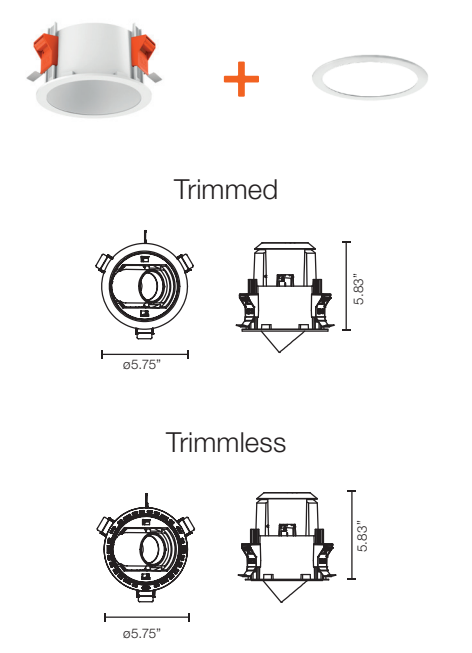

Johnny 120 (4.7") 1L Round

Ceiling Recessed Trimmed / Trimless

Optional Accesories

Cross baffle	Elliptical lens	Flood lens
08.8429.00	08.8431.00	08.8432.00
		
Honeycomb anti-glare louvre	Snoot shielding cone	Registration tray -non electrical, place holder for non IC new construction, ø 5.31"
08.8428.00	08.0526.00 08.0526.40	TRAY-0025
		14.00" ø5.31" 10.00" 18.00" 5.34"