



Light Shadow Pro Ø45 Push

IC Rated / Ceiling Recessed Adjustable Downlight

Description

Luminaire with 2x1 functionality: it can work as downlight (recessed, flush with ceiling) or as a projector (fully adjustable). The passage from one position to the other can be made by moving the product easily by hand.

Lamp

Lamps Type	Power LED
Wattage	6W
Initial Lumens	643 lm, 679 lm, 716 lm
Color Temperature	2700K, 3000K, 4000K
Color rendering	CRI 90

Optical

Beam Angle	15° / 20° / 33°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum / Injected thermoplastic
Aiming	Adjustable
Weight	0.5 Lbs
Ingress Protection Rating	IP20

Finishes: Rear + Arm: ☐ 40 White ☒ 14 Black

Interior/Exterior:


☐ 40 White ☒ 14 Black ☐ ER Steel ☐ ES Bronze



Installation type	Ceiling recessed – Mud-in IC - Rated
Environment	Indoor



Dimensions



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.



Light Shadow Pro Ø45 Push

IC Rated / Ceiling Recessed Adjustable Downlight

Electrical & Control

Driver Input Voltage	120V - 277V
Control	Standard 0-10V dimming 1% linear, triac
Driver	Remote - Order Separately
Current	500mA
Vf	12V
Class	2

Performance

Delivered Lumens	515 lm, 594 lm
Efficacy	75.6 lm/W


Notes

Light Shadow Push can be placed in top position, functioning as a downlight (perfectly flush to ceiling), or in bottom position, functioning as an adjustable spotlight.

IC Rated- Inherently protected.



Dimensions



Certifications




Photometrics

For current IES files please visit
arch.flosusa.com

Warranty


2 years from date of sale.

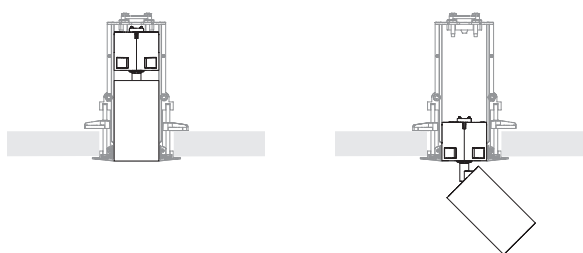

Light Shadow Pro Ø45 Push

IC Rated / Ceiling Recessed Adjustable Downlight

How to specify

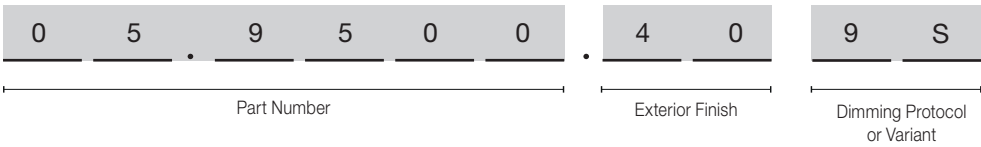


Optic Spot (15°) How to Specify ex. 05.9500.409S

CCT	CRI	Initial Lumens	Watts	Beam Angle	Arm Finish	Part Number	Interior Finish	Exterior Finish	Variant
2700	90	643	6	15°	White	05.9500	White	40 = White	9S = Remote Power Supply
						05.9501	Black	40 = White	
						05.9503	Steel	40 = White	
3000	90	679	6		White	05.9530	White	40 = White	
						05.9531	Black	40 = White	
						05.9533	Steel	40 = White	
4000	90	716	6		White	05.9560	White	40 = White	
						05.9561	Black	40 = White	
						05.9563	Steel	40 = White	
2700	90	643	6	15°	Black	05.9505	White	40 = White 14 = Black	
						05.9504	Black	40 = White 14 = Black ER = Steel ES = Bronze	
3000	90	679	6		Black	05.9535	White	40 = White 14 = Black	
						05.9534	Black	40 = White 14 = Black ER = Steel ES = Bronze	
4000	90	716	6		Black	05.9565	White	40 = White 14 = Black	
						05.9564	Black	40 = White 14 = Black ER = Steel ES = Bronze	
2700	90	643	6	15°	Black	05.9507	Steel	14 = Black 40 = White ER = Steel	
3000	90	679	6		Black	05.9537	Steel	14 = Black 40 = White ER = Steel	
4000	90	716	6		Black	05.9567	Steel	14 = Black 40 = White ER = Steel	
2700	90	643	6	15°	Black	05.9508	Bronze	ES Bronze	
3000	90	679	6		Black	05.9538	Bronze	ES Bronze	
4000	90	716	6		Black	05.9568	Bronze	ES Bronze	

Light Shadow Pro Ø45 Push

IC Rated / Ceiling Recessed Adjustable Downlight

How to specify

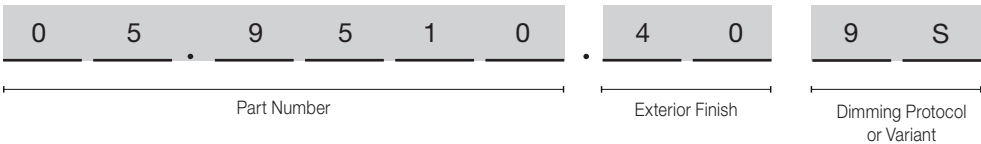


Optic Medium (20°) How to Specify ex. 05.9510.409S

CCT	CRI	Initial Lumens	Watts	Beam Angle	Arm Finish	Part Number	Interior Finish	Exterior Finish	Variant
2700	90	643	6	20°	White	05.9510	White	40 = White	9S = Remote Power Supply
						05.9511	Black	40 = White	
						05.9513	Steel	40 = White	
3000	90	679	6		White	05.9540	White	40 = White	
						05.9541	Black	40 = White	
						05.9543	Steel	40 = White	
4000	90	716	6	20°	White	05.9570	White	40 = White	
						05.9571	Black	40 = White	
						05.9573	Steel	40 = White	
2700	90	643	6		Black	05.9515	White	40 = White 14 = Black	
						05.9514	Black	40 = White 14 = Black ER = Steel ES = Bronze	
3000	90	679	6		Black	05.9545	White	40 = White 14 = Black	
						05.9544	Black	40 = White 14 = Black ER = Steel ES = Bronze	
4000	90	716	6	20°	Black	05.9575	White	40 = White 14 = Black	
						05.9574	Black	40 = White 14 = Black ER = Steel ES = Bronze	
2700	90	643	6		Black	05.9517	Steel	14 = Black 40 = White ER = Steel	
3000	90	679	6			05.9547	Steel	14 = Black 40 = White ER = Steel	
4000	90	716	6			05.9577	Steel	14 = Black 40 = White ER = Steel	
2700	90	643	6		Black	05.9518	Bronze	ES Bronze	
3000	90	679	6			05.9548	Bronze	ES Bronze	
4000	90	716	6			05.9578	Bronze	ES Bronze	

Light Shadow Pro Ø45 Push

IC Rated / Ceiling Recessed Adjustable Downlight

How to specify

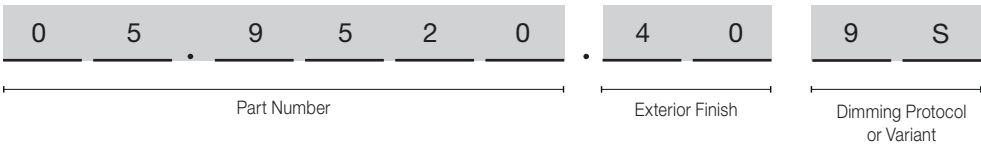

Optic Flood (33°) How to Specify ex. 05.9520.409S


CCT	CRI	Initial Lumens	Watts	Beam Angle	Arm Finish	Part Number	Interior Finish	Exterior Finish	Variant
2700	90	643	6	33°	White	05.9520	White	40 = White	9S = Remote Power Supply
						05.9521	Black	40 = White	
						05.9523	Steel	40 = White	
3000	90	679	6		White	05.9550	White	40 = White	
						05.9551	Black	40 = White	
						05.9553	Steel	40 = White	
4000	90	716	6		White	05.9580	White	40 = White	
						05.9581	Black	40 = White	
						05.9583	Steel	40 = White	
2700	90	643	6	33°	Black	05.9525	White	40 = White 14 = Black	
						05.9524	Black	40 = White 14 = Black ER = Steel ES = Bronze	
3000	90	679	6		Black	05.9555	White	40 = White 14 = Black	
						05.9554	Black	40 = White 14 = Black ER = Steel ES = Bronze	
4000	90	716	6		Black	05.9585	White	40 = White 14 = Black	
						05.9584	Black	40 = White 14 = Black ER = Steel ES = Bronze	
2700	90	643	6	33°	Black	05.9527	Steel	14 = Black 40 = White ER = Steel	
3000	90	679	6		Black	05.9557	Steel	14 = Black 40 = White ER = Steel	
4000	90	716	6		Black	05.9587	Steel	14 = Black 40 = White ER = Steel	
2700	90	643	6	33°	Black	05.9528	Bronze	ES Bronze	
3000	90	679	6		Black	05.9558	Bronze	ES Bronze	
4000	90	716	6		Black	05.9588	Bronze	ES Bronze	

Light Shadow Pro Ø45 Push


IC Rated / Ceiling Recessed Adjustable Downlight

Photometrics Internal Finish (I) · White


2700 K - SPOT




2700 K - MEDIUM




2700 K - FLOOD




3000 K - SPOT




3000 K - MEDIUM




3000 K - FLOOD




4000 K - SPOT



4000 K - MEDIUM



4000 K - FLOOD



Light Shadow Pro Ø45 Push


IC Rated / Ceiling Recessed Adjustable Downlight

Required Driver

12W , 120-277V , 0-10V Dim to 1%,
programmable to 500mA, volts 2-42
Vdc.

Part Number:

SP12W500MA-10V-T01

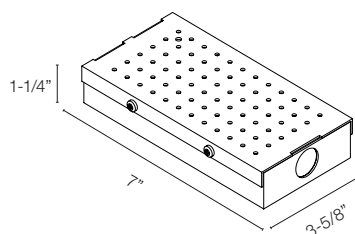


Minimum: 1
Maximum: 1

Splice Box UL 7"x3-5/8"x1-1/4", UL.
With Driver Programmed to 500mA
, 25W, 0-10V Dimmable, 120-277V /
Required for Canada

Part Number:

SP25W500MA-10V-A02

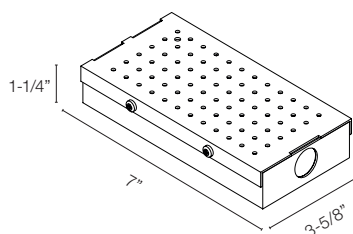

Minimum: 2
Maximum: 3

LED Driver, 40W 500mA , Var Dim,
UL, 120/277V dimming: 0-10V , TRIAC
dimensions: 6.75" x 2.12" x 0.78"

Part Number:

SPSB40W500MA-V-Y1






Minimum: 1
Maximum: 4

Required Mounting Accessories

Pre-installation frame. 1 L

Part Number:

08.0757.00.9S



2.36" x 2.67"

Light Shadow Pro Ø45 Push

IC Rated / Ceiling Recessed Adjustable Downlight

