



Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

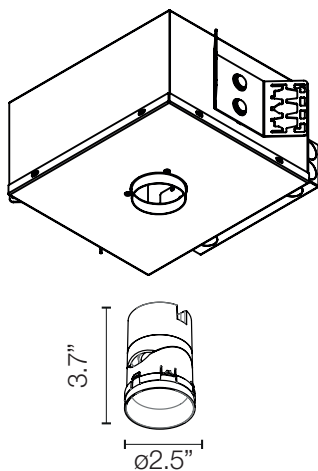
Description

The natural evolution of Light Shadow, now available in Pro versions. This high comfort downlight can be integrated in the space thanks to its reduced size and compact structure. Born to give high efficiency lighting with the highest standards of visual comfort when using the black patented reflectors. The dual focus lenses that the PRO family uses are developed by Flos to ensure the maximum control and give an exceptional even light beam. Light shadow PRO takes advantage of an innovative micro-textured silicone lens that allows extreme control without sacrificing the product efficiency. A total of 5 optics are available in this collection: Super Spot, Spot, Medium, Flood, Wide Flood.



Dimensions

HOUSING: 12.7" x 11.9" x 6.1"



Certifications



JA8-2022 CA
TITLE 24
LISTED

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

Lamp Type	LED
Wattage	8.8W
Initial Lumens	816lm, 834lm, 925lm
Color Temperature	2700K, 3000K, 4000K *3500K (See Notes)
Color rendering	90

Optical

Beam Angle	16°/ 21°/ 31°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable 30°
Weight	0.5 Pounds
Ingress Protection Rating	IP20

Finishes:

☐ White

☒ Black

☐ Steel

☐ Bronze



Installation type Ceiling Recessed - Remote from Housing, IC-Rated

Environment Indoor

Maximum Plenum Height: 7"



Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

Electrical & Control

Driver Location	Remote from Housing
Driver Input Voltage	120V - 277V
Control	0-10V, FWD Phase, Eco Syst.
Current	700mA
Class	2


Performance

Delivered Lumens	678lm, 692lm, 768lm
Efficacy	up to 87 lm/W



Dimensions

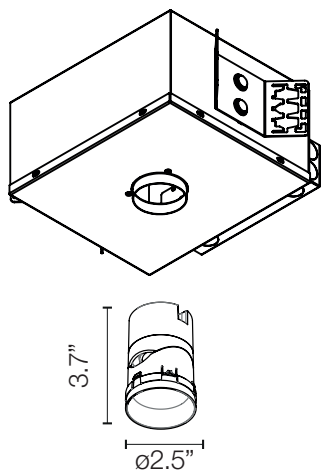HOUSING: 12.7" x 11.9" x 6.1"



Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Pre-Installation frame required. Depending on Installation requirements select Trim or Trimless Installation frames

Airtight Listed housing for new construction only.

JA8 Certification.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Certifications



JA8-2022 CA
TITLE 24
LISTED

Photometrics

For current IES files please visit
arch.flosusa.com

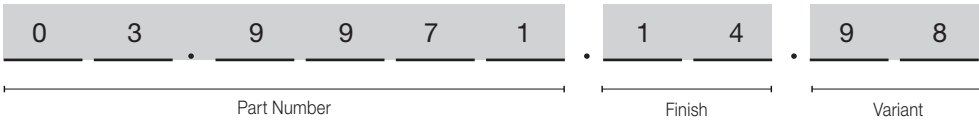
Warranty

2 years from date of sale.

Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

How to specify



Optic Spot (16°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	816	675	8,8	16°	03.9971	14 Black 40 White ER Steel ES Bronze	Beam Angle: 16° h(m) E(lx) D(m) 1 8749 0.28 2 2187 0.55 3 972 0.83 4 547 1.11 5 350 1.39 Luminous flux luminaire 722 lm
3000	90	834	690	8,8		03.9976	14 Black 40 White ER Steel ES Bronze	Beam Angle: 16° h(m) E(lx) D(m) 1 9270 0.28 2 2317 0.55 3 1030 0.83 4 579 1.11 5 371 1.39 Luminous flux luminaire 765 lm
4000	90	925	765	8,8		03.9931	14 Black 40 White ER Steel ES Bronze	Beam Angle: 16° h(m) E(lx) D(m) 1 9541 0.28 2 2385 0.55 3 1060 0.83 4 596 1.11 5 382 1.39 Luminous flux luminaire 787 lm

Optic Medium (21°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	816	659	8,8	21°	03.9972	14 Black 40 White ER Steel ES Bronze	Beam Angle: 21° h(m) E(lx) D(m) 1 5856 0.37 2 1464 0.73 3 651 1.10 4 366 1.47 5 234 1.83 Luminous flux luminaire 728 lm
3000	90	834	686	8,8		03.9977	14 Black 40 White ER Steel ES Bronze	Beam Angle: 21° h(m) E(lx) D(m) 1 6205 0.37 2 1552 0.73 3 689 1.10 4 388 1.47 5 248 1.83 Luminous flux luminaire 771 lm
4000	90	925	760	8,8		03.9932	14 Black 40 White ER Steel ES Bronze	Beam Angle: 21° h(m) E(lx) D(m) 1 6386 0.37 2 1597 0.73 3 710 1.10 4 399 1.47 5 256 1.83 Luminous flux luminaire 794 lm

Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

Optic Flood (31°)

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Finish	Photometrics
2700	90	816	678	8,8	31°	03.9973	14 Black 40 White ER Steel ES Bronze	Beam Angle: 31° h(m) E(lx) D(m) 1 2638 0.56 2 659 1.11 3 293 1.67 4 165 2.23 5 106 2.79 Luminous flux luminaire 738 lm
3000	90	834	692	8,8		03.9978	14 Black 40 White ER Steel ES Bronze	Beam Angle: 31° h(m) E(lx) D(m) 1 2796 0.56 2 699 1.11 3 311 1.67 4 174 2.23 5 112 2.79 Luminous flux luminaire 782 lm
4000	90	925	768	8,8		03.9933	14 Black 40 White ER Steel ES Bronze	Beam Angle: 31° h(m) E(lx) D(m) 1 2877 0.56 2 719 1.11 3 320 1.67 4 180 2.23 5 115 2.79 Luminous flux luminaire 805 lm

Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

Required Accessories

Frame Trim Ø60. Adjustable

08.0164.40
08.0164.14

Frame No Trim Ø60. Adjustable
CEILING TYPE: Drywall

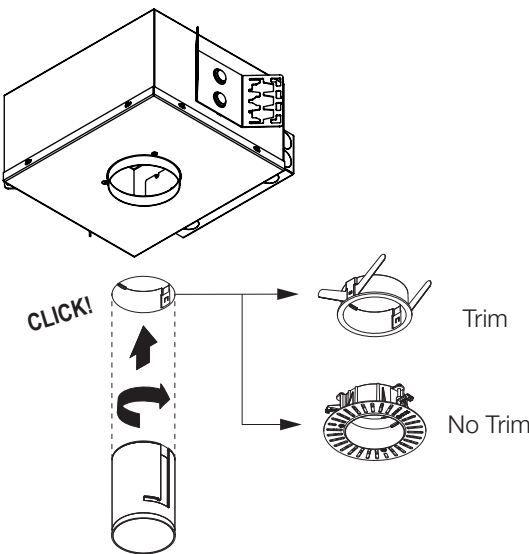
08.0166.00

Optional Accessories

Orientation Toolkit Adjustable Ø60

08.0825.00








How to order Light Shadow PRO



Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

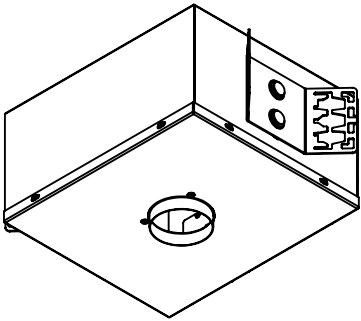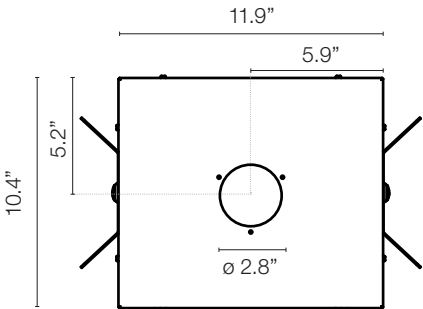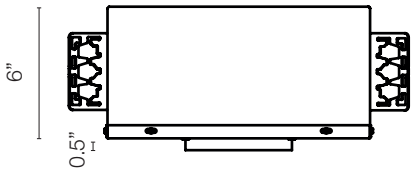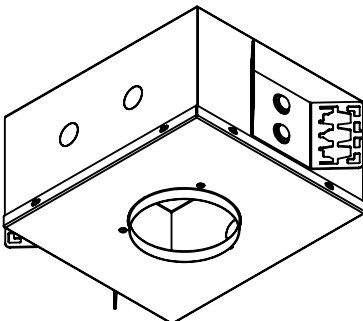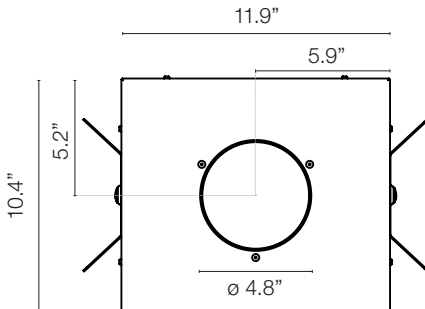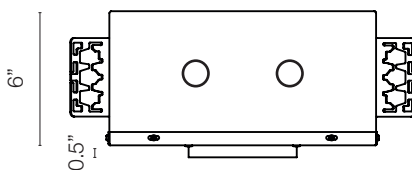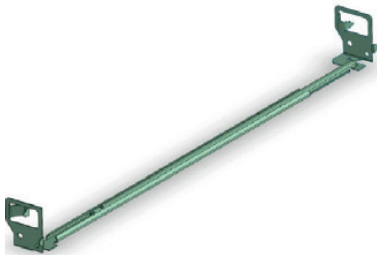Required Mounting Accessories

LS PRO 60 Trim Airtight Housing for New construction, Remote Driver (see options below). 0-10V and ELV dimmable driver. CCEA Chicago Plenum	LS PRO 60 Trimless Airtight Housing for New construction, Remote Driver (see options below). 0-10V and ELV dimmable driver. CCEA Chicago Plenum	1 male, 1 female hanger bar Extendable from 14" to 24" centers. Qty required for housing is 2. Part number listed below is a Set of 2
08.7070.00A90	08.7073.00.90	08.1201.00.UL
  	  	

Light Shadow PRO 60 Adjustable

IC Rated / Airtight Recessed Downlight Designed by Flos Architectural

Required Remote Drivers

Osram OTi25. 25W, Prog 150-1250MA, 8-55VDC. 0-10V	Lutron PEQ11UVN-2A070 20W max, 0.15 - 1.05A, 10-54VDC Dgtl Eco 0.1%	ERP ESS015W-0700-18 12.6W, 700mA, 10-1VDC, Tri mode dim
SP25W700MA-10V-A01	SP20W700MA-PEQ-S01	SP15W700MA-VAR-U01
