



Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

Description

Eclectic is a recessed in ceiling, indoor luminaire, designed with a fully modular concept, following the principles of circular design and economy. This means that the product, which is marketed as a complete luminaire, can be broken down into a series of modules that define its features and which, in turn, are offered as spare parts.

Lamp


Lamps Type	LED Array
Wattage	7.5 W
Output Nominal	686 lm / 768 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90

Optical

Beam Angle (S / M / F)	15° / 23° / 35°
Lighting Type	Direct
Light Distribution	Symmetric



Dimensions

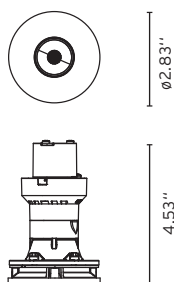

Physical

Material	Pressed steel and matte black, powder-coated
Aiming	Fixed
Weight	0.36 lb
Ingress Protection Rating	IP54

Finishes

☐ 40 White

☒ 14 Black



Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Installation type	Ceiling - Recessed, Non-IC, Remote
Environment	Indoor dry location



Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

Electrical & Control

Voltage	12.3 V
Control	0-10V
Current	600mA
Driver Location	Remote Driver

Performance

Delivered Lumens	From 405 lm To 592 lm
Efficacy	up to 59.9 lm/W

Notes

Beam spreads available in 15° and 35°.

Optional filters to be ordered separately.

Listings: UL Listed, IP54.

Installation frame ordered separately. When ordering registration tray the installation frame is included.


Non IC (requires 3" clearance from insulation) with remote driver.

Driver must be located in temperate accessible location.

Specify luminaire with style module, example: 05.8000.14.UQ + 08.0721.40



Dimensions

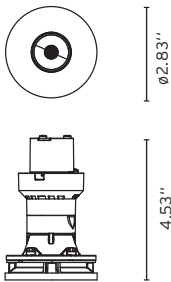

Certifications





Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty


2 years from date of sale.

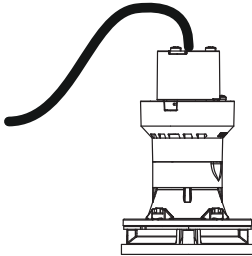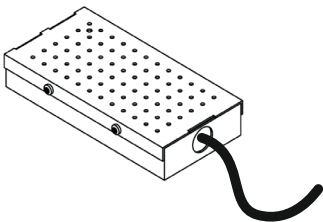

Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

How to specify Eclectic Ø70 Fixed CONE


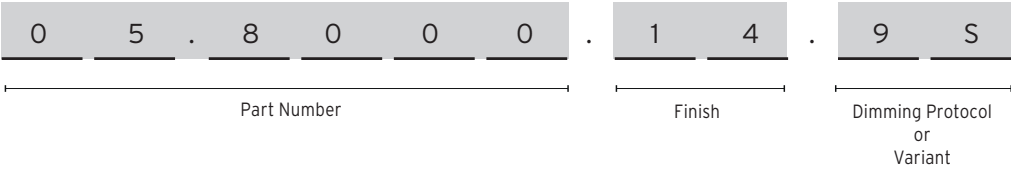


How to Specify ex. 05.8000.14.UQ + 08.0721.40 (luminaire + style module)



CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	405	15°	05.8000	<div>40 White</div> <div>14 Black</div>	9S = Splice Box, 1% dim, 0-10V, 120V
				514	20°	05.8001		
				529	35°	05.8002		
3000	90	7.5	768	405	15°	05.8010	<div>40 White</div> <div>14 Black</div>	9S = Splice Box, 1% dim, 0-10V, 120V
				576	20°	05.8011		
				592	35°	05.8012		

Photometrics

2700K

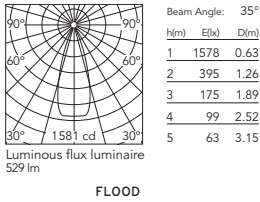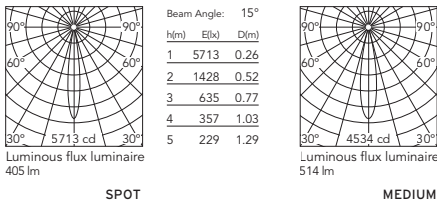


3000K

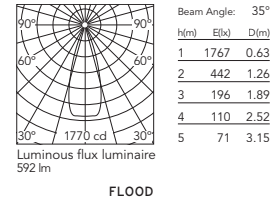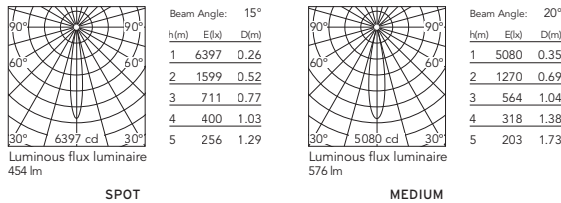

Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

How to specify Eclectic Ø70 Fixed SOFT


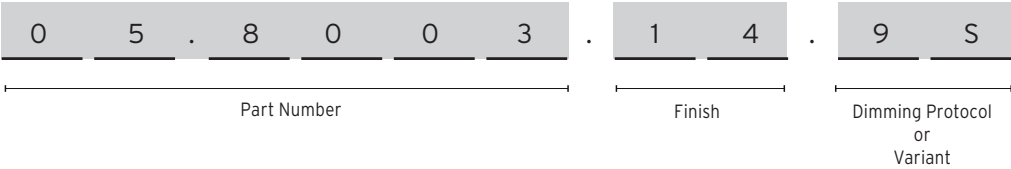


How to Specify ex. 05.8003.14.UQ + 08.0721.40 (luminaire + style module)



Table with 9 columns: CCT, CRI, Watts, Initial Lumens, Delivered Lumens, Beam Angle, Part Number, Finish, Variant. It lists specifications for two CCT options (2700K and 3000K) across different beam angles (15°, 20°, 35°) and finishes (40 White, 14 Black).

Photometrics

2700K

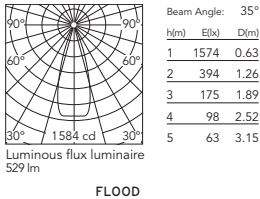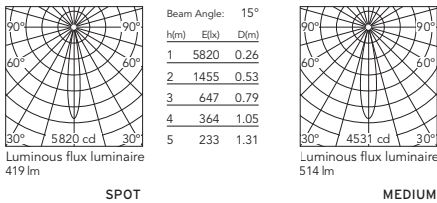


3000K

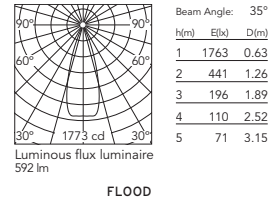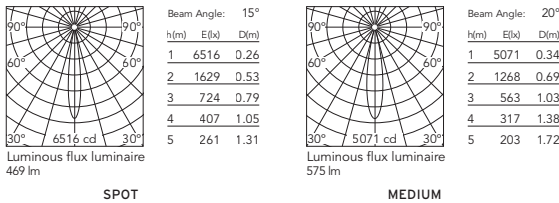

Eclectic Ø70 Fixed
NON-IC Remote Ceiling Recessed Downlight

How to specify Eclectic Ø70 Fixed FLAT



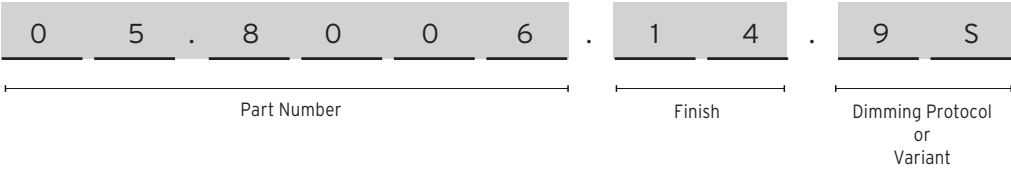


How to Specify ex. 05.8006.14.UQ + 08.0721.40 (luminaire + style module)




CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	404	15°	05.8006	40 White 14 Black	9S = Splice Box, 1% dim, 0-10V, 120V
				502	20°	05.8007		
				518	35°	05.8008		
3000	90	7.5	768	452	15°	05.8016	40 White 14 Black	9S = Splice Box, 1% dim, 0-10V, 120V
				562	20°	05.8017		
				581	35°	05.8018		

Photometrics

2700K

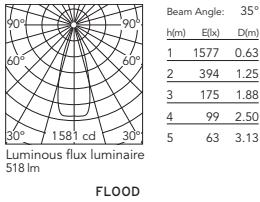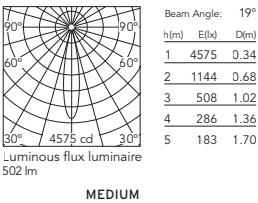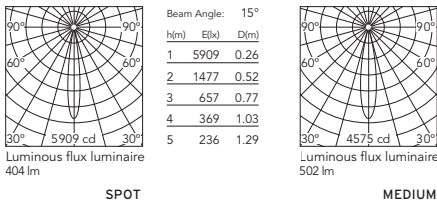

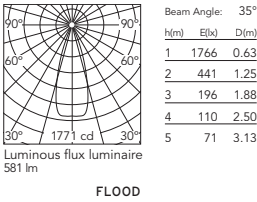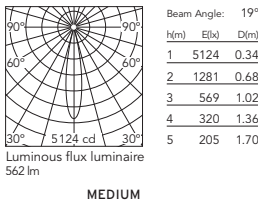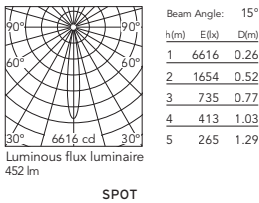



3000K






Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

Required Accessories

Trim Frame.	No Trim Frame.
<div><div><div></div><div>08.0670.40</div></div><div><div></div><div>08.0670.14</div></div></div>	<div><div>08.0672.00</div></div>
	
	






Optional Accessories

Honeycomb	Dichroic CCT Filter Increase 2700K >> 3125±75K 3000K >> 3600±75K	Dichroic CCT Filter Decrease 2700K >> 3125±75K 3000K >> 3600±75K	
08.0727.00	08.0731.00	08.0732.00	
			

Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

Spare Parts

<div>Lenses</div> <div>Optic Spot 08.0711.00 Optic Medium 08.0712.00 Optic Flood 08.0713.00</div> <div></div>	<div>Orientation Module</div> <div>08.0739.00</div> <div></div>	<div>Style Modules CONE</div> <div><div>08.0721.40</div><div>08.0721.14</div></div> <div></div>
<div>Style Modules SOFT</div> <div><div>08.0722.40</div><div>08.0722.14</div></div> <div></div>	<div>Style Modules FLAT</div> <div><div>08.0723.40</div><div>08.0723.14</div></div> <div></div>	

Eclectic Ø70 Fixed

NON-IC Remote Ceiling Recessed Downlight

Driver

Splice Box 7"x 3-5/8"x 1-1/4", 600mA, 25W, 0-10V Dimmable, 120/277V

SP25W600MA-10V-A02

