



Eclectic Ø70 Adjustable - Quick Ship

Ceiling Recessed Downlight

Description

Eclectic is a recessed in ceiling, indoor luminaire, designed with a fully modular concept, following the principles of circular design and economy. This means that the product, which is marketed as a complete luminaire, can be broken down into a series of modules that define its features and which, in turn, are offered as spare parts.

Lamp


Lamps Type	LED Array
Wattage	7.5 W
Output Nominal	686 lm / 768 lm
Color Temperature	2700K / 3000K
Color rendering	CRI < 90

Optical

Beam Angle (S / M / F)	15° / 23° / 35°
Lighting Type	Direct
Light Distribution	Symmetric



Dimensions

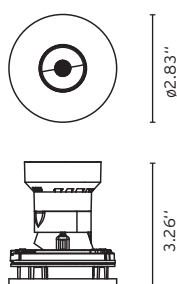

Physical

Material	Pressed steel and matte black, powder-coated
Aiming	Adjustable
Weight	0.36 lb
Ingress Protection Rating	IP20

Finishes

☐ 40 White

☒ 14 Black



Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Installation type

Ceiling - Recessed, Non-IC
Requires minimum space of 11" above ceiling

Environment

Indoor dry location



Eclectic Ø70 Adjustable - Quick Ship

Ceiling Recessed Downlight

Electrical & Control

Voltage	12.3 V
Control	1-10V
Current	600mA
Driver Location	Attached Splice Box

Performance

Delivered Lumens	From 395 lm To 560 lm
Efficacy	up to 57.78 lm/W

Notes

Maximum tilt angle 40°

Beam spreads available in 15° and 35°.

Optional filters to be ordered separately.


Listings: UL Listed, IP20.

Installation frame ordered separately. When ordering registration tray the installation frame is included.

Requires minimum space of 11" above ceiling.

Specify luminaire with style module, example: 05.8020.14.UQ + 08.0721.40

Dimensions

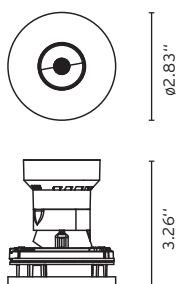

Certifications





Class 2

Photometrics

For current IES files please visit architectural.flosusa.com


Warranty

2 years from date of sale.

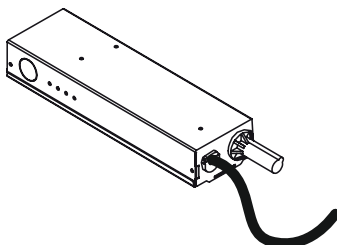

Eclectic Ø70 Adjustable - Quick Ship
Ceiling Recessed Downlight

How to specify Eclectic Ø70 Adjustable CONE


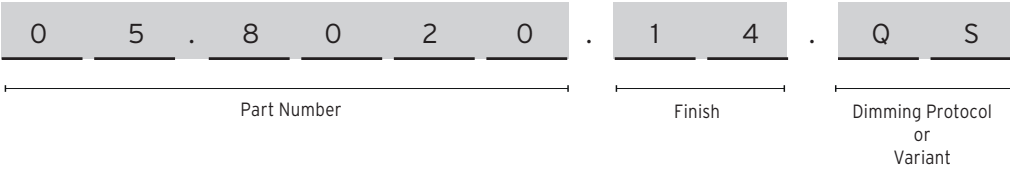


How to Specify ex. 05.8000.14.UQ + 08.0721.40 (luminaire + style module)



Table with 9 columns: CCT, CRI, Watts, Initial Lumens, Delivered Lumens, Beam Angle, Part Number, Finish, Variant. It lists specifications for two CCT options (2700K and 3000K) across different beam angles (15°, 23°, 35°) and finishes (40 White, 14 Black).

Photometrics

2700K

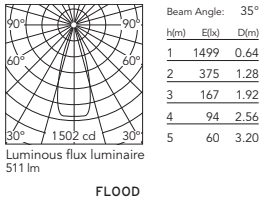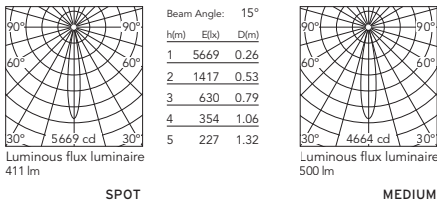


3000K

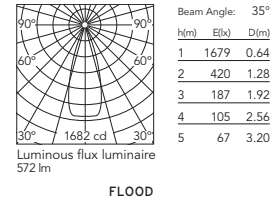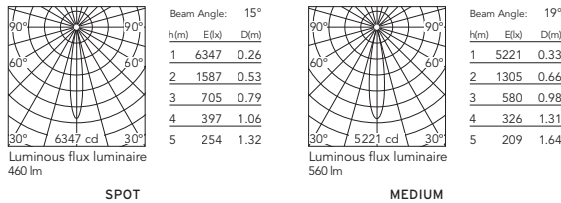

Eclectic Ø70 Adjustable - Quick Ship
Ceiling Recessed Downlight

How to specify Eclectic Ø70 Adjustable SOFT

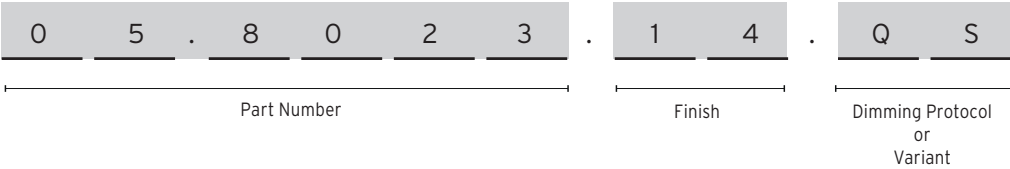


How to Specify ex. 05.8023.14.UQ + 08.0721.40 (luminaire + style module)


Table with 9 columns: CCT, CRI, Watts, Initial Lumens, Delivered Lumens, Beam Angle, Part Number, Finish, Variant. It lists specifications for two CCT options (2700K and 3000K) across different beam angles (15°, 23°, 35°) and finishes (40 White, 14 Black).

Photometrics

2700K

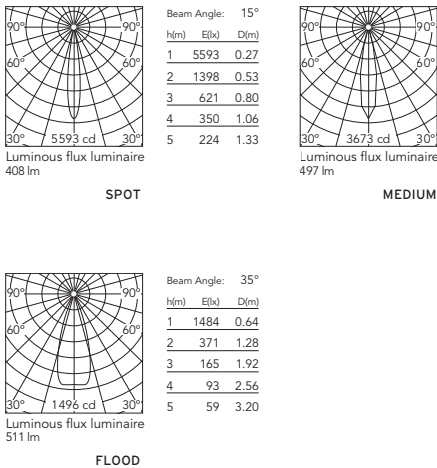


3000K

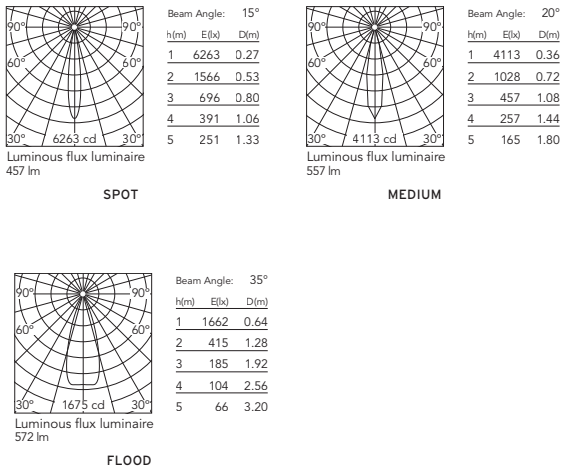

Eclectic Ø70 Adjustable - Quick Ship

Ceiling Recessed Downlight

How to specify Eclectic Ø70 Adjustable FLAT

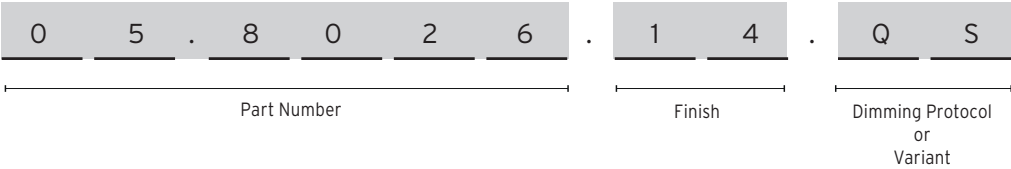


How to Specify ex. 05.8026.14.UQ + 08.0721.40 (luminaire + style module)


CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	395	15°	05.8026	<div><div></div> 40 White</div> <div><div></div> 14 Black</div>	QS = Splice Box, 1% dim, 0-10V, 120V, quick ship program
				448	23°	05.8027		
				501	35°	05.8028		
3000	90	7.5	686	444	15°	05.8036	<div><div></div> 40 White</div> <div><div></div> 14 Black</div>	QS = Splice Box, 1% dim, 0-10V, 120V, quick ship program
				501	23°	05.8037		
				560	35°	05.8038		

Photometrics


2700K



SPOT




MEDIUM




FLOOD


3000K



SPOT



MEDIUM



FLOOD


Eclectic Ø70 Adjustable - Quick Ship

Ceiling Recessed Downlight

Required Accessories


Trim Frame.

- ☐ 08.0670.40
- ☒ 08.0670.14



No Trim Frame.

08.0672.00

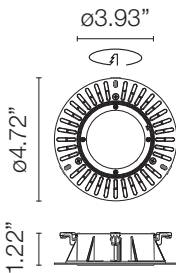

Eclectic Ø70 Adjustable - Quick Ship

Ceiling Recessed Downlight

Driver

Splice Box 600mA 1-10V, 120V

06.0399.00.90

