



Eclectic Ø70 Fixed

Ceiling Recessed Downlight

Description

Eclectic is a recessed in ceiling, indoor luminaire, designed with a fully modular concept, following the principles of circular design and economy. This means that the product, which is marketed as a complete luminaire, can be broken down into a series of modules that define its features and which, in turn, are offered as spare parts.

Lamp

Lamps Type	LED Array
Wattage	7.5 W
Output Nominal	686 lm / 768 lm
Color Temperature	2700K / 3000K
Color rendering	CRI <90

Optical

Beam Angle (S / M / F)	15° / 23° / 35°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Pressed steel and matte black, powder-coated
Aiming	Fixed
Weight	0.36 lb
Ingress Protection Rating	IP54

Finishes

☐ 40 White

☒ 14 Black




Installation type	Ceiling - Recessed, Non-IC Requires minimum space of 11" above ceiling
-------------------	---

Environment	Indoor dry location
-------------	---------------------



Dimensions

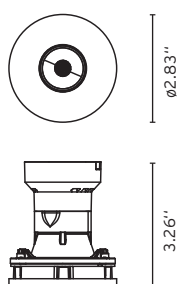

Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.




Eclectic Ø70 Fixed

Ceiling Recessed Downlight



Dimensions

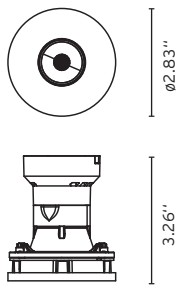

Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Electrical & Control



Voltage	12.3 V
Control	1-10V
Current	600mA
Driver Location	Attached Splice Box

Performance

Delivered Lumens	From 405 lm To 592 lm
Efficacy	up to 59.9 lm/W

Notes


- Beam spreads available in 15° and 35°.
- Optional filters to be ordered separately.
- Listings: UL Listed, IP54.
- Installation frame ordered separately. When ordering registration tray the installation frame is included.
- Requires minimum space of 11" above ceiling.
- Specify luminaire with style module, example: 05.8000.14.UQ + 08.0721.40

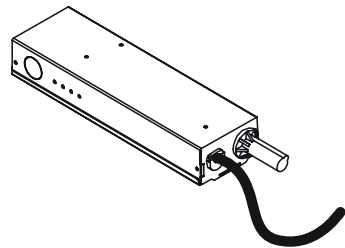

Eclectic Ø70 Fixed

Ceiling Recessed Downlight

How to specify Eclectic Ø70 Fixed CONE



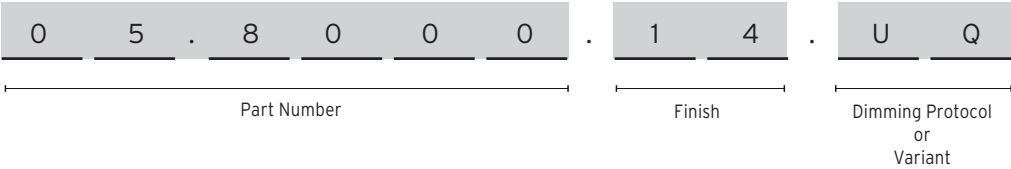


How to Specify ex. 05.8000.14.UQ + 08.0721.40 (luminaire + style module)




CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	405	15°	05.8000	40 White 14 Black	UQ = Splice Box, 1% dim, 0-10V, 120V
				514	20°	05.8001		
				529	35°	05.8002		
3000	90	7.5	686	405	15°	05.8010	40 White 14 Black	UQ = Splice Box, 1% dim, 0-10V, 120V
				576	20°	05.8011		
				592	35°	05.8012		

Photometrics

2700K

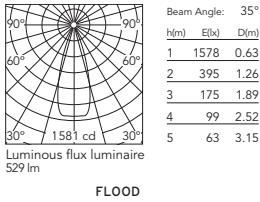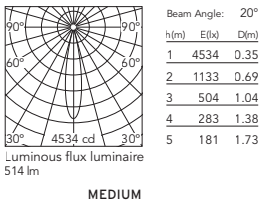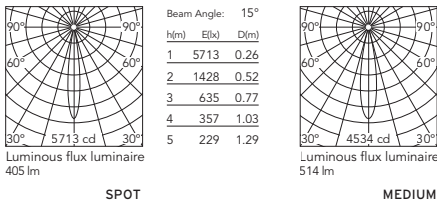


3000K

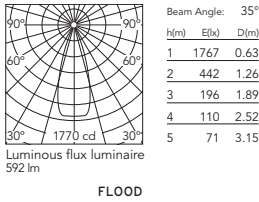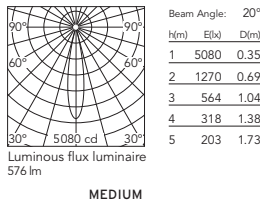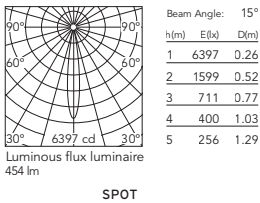

Eclectic Ø70 Fixed

Ceiling Recessed Downlight

How to specify Eclectic Ø70 Fixed SOFT


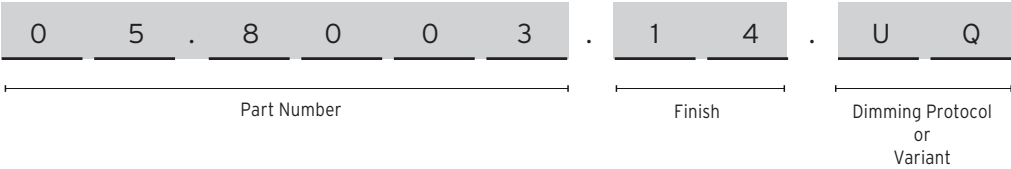


How to Specify ex. 05.8003.14.UQ + 08.0721.40 (luminaire + style module)



CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	419	15°	05.8003	<div>40 White</div> <div>14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				514	20°	05.8004		
				529	35°	05.8005		
3000	90	7.5	686	469	15°	05.8013	<div>40 White</div> <div>14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				575	20°	05.8014		
				592	35°	05.8015		

Photometrics

2700K

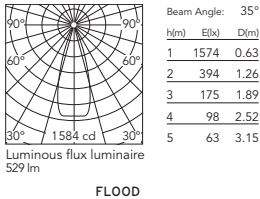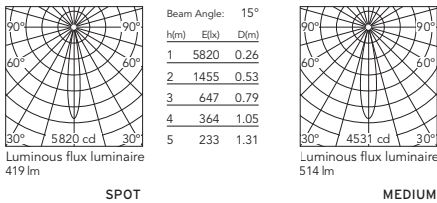


3000K

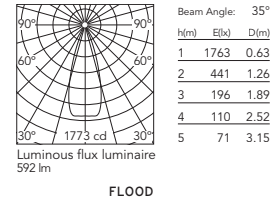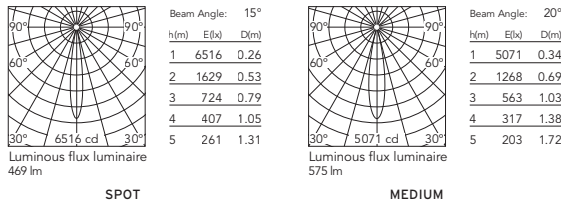

Eclectic Ø70 Fixed

Ceiling Recessed Downlight

How to specify Eclectic Ø70 Fixed FLAT

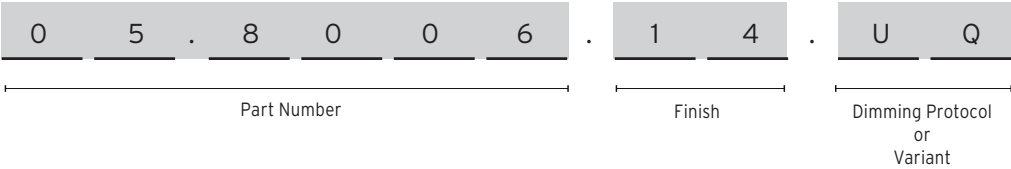


How to Specify ex. 05.8006.14.UQ + 08.0721.40 (luminaire + style module)


CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	404	15°	05.8006	<div><div></div> 40 White</div> <div><div></div> 14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				502	20°	05.8007		
				518	35°	05.8008		
3000	90	7.5	686	452	15°	05.8016	<div><div></div> 40 White</div> <div><div></div> 14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				562	20°	05.8017		
				581	35°	05.8018		

Photometrics


2700K



SPOT




MEDIUM




FLOOD


3000K



SPOT



MEDIUM







FLOOD




Eclectic Ø70 Fixed

Ceiling Recessed Downlight

Required Accessories

Trim Frame.	No Trim Frame.
<div><div><div></div><div>08.0670.40</div></div><div><div></div><div>08.0670.14</div></div></div>	<div><div>08.0672.00</div></div>
	
	












Optional Accessories

Honeycomb	Dichroic CCT Filter Increase 2700K >> 3125±75K 3000K >> 3600±75K	Dichroic CCT Filter Decrease 2700K >> 3125±75K 3000K >> 3600±75K	
08.0727.00	08.0731.00	08.0732.00	
			

Eclectic Ø70 Fixed

Ceiling Recessed Downlight

Spare Parts

<p>Lenses</p> <hr/> <p>Optic Spot 08.0711.00</p> <p>Optic Medium 08.0712.00</p> <p>Optic Flood 08.0713.00</p> <hr/> 	<p>Orientation Module</p> <hr/> <p>08.0739.00</p> <hr/> 	<p>Style Modules CONE</p> <hr/> <p> 08.0721.40</p> <p> 08.0721.14</p> <hr/> 
<p>Style Modules SOFT</p> <hr/> <p> 08.0722.40</p> <p> 08.0722.14</p> <hr/> 	<p>Style Modules FLAT</p> <hr/> <p> 08.0723.40</p> <p> 08.0723.14</p> <hr/> 	

Eclectic Ø70 Fixed

Ceiling Recessed Downlight

Driver

Splice Box 600mA 1-10V, 120V

06.0399.00.90

