



Eclectic Ø70 Adjustable
Ceiling Recessed Downlight

Description

Eclectic is a recessed in ceiling, indoor luminaire, designed with a fully modular concept, following the principles of circular design and economy. This means that the product, which is marketed as a complete luminaire, can be broken down into a series of modules that define its features and which, in turn, are offered as spare parts.

Lamp

Lamps Type	LED Array
Wattage	7.5 W
Output Nominal	686 lm / 768 lm
Color Temperature	2700K / 3000K
Color rendering	CRI < 90

Optical

Beam Angle (S / M / F)	15° / 23° / 35°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Pressed steel and matte black, powder-coated
Aiming	Adjustable
Weight	0.36 lb
Ingress Protection Rating	IP20

Finishes

☐ 40 White

☒ 14 Black



Installation type


Ceiling - Recessed, Non-IC
Requires minimum space of 11" above ceiling

Environment

Indoor dry location



Dimensions

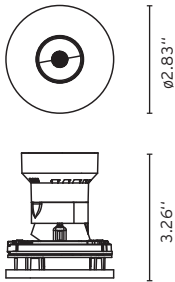

Certifications



Class 2

Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty

2 years from date of sale.



Eclectic Ø70 Adjustable

Ceiling Recessed Downlight

Electrical & Control

Voltage	12.3 V
Control	1-10V
Current	600mA
Driver Location	Attached Splice Box

Performance

Delivered Lumens	From 395 lm To 560 lm
Efficacy	up to 57.78 lm/W

Notes

Maximum tilt angle 40°

Beam spreads available in 15° and 35°.

Optional filters to be ordered separately.


Listings: UL Listed, IP20.

Installation frame ordered separately. When ordering registration tray the installation frame is included.

Requires minimum space of 11" above ceiling.

Specify luminaire with style module, example: 05.8020.14.UQ + 08.0721.40

Dimensions

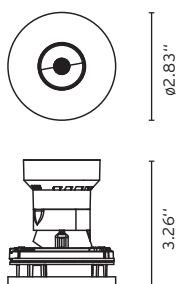

Certifications





Class 2

Photometrics

For current IES files please visit architectural.flosusa.com


Warranty

2 years from date of sale.

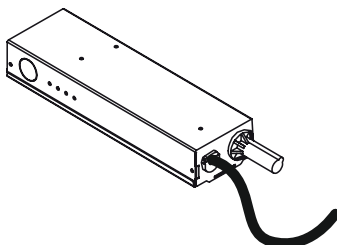

Eclectic Ø70 Adjustable
Ceiling Recessed Downlight

How to specify Eclectic Ø70 Adjustable CONE


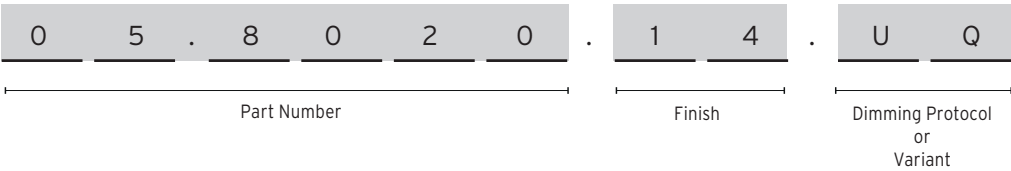


How to Specify ex. 05.8000.14.UQ + 08.0721.40 (luminaire + style module)



CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	411	15°	05.8020	<div>40 White</div> <div>14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				500	23°	05.8021		
				511	35°	05.8022		
3000	90	7.5	686	460	15°	05.8030	<div>40 White</div> <div>14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				560	23°	05.8031		
				572	35°	05.8032		

Photometrics

2700K

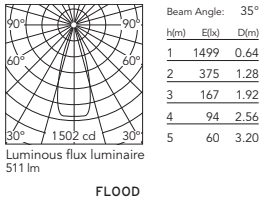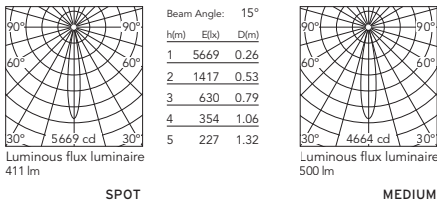


3000K

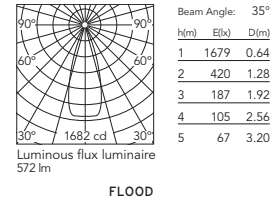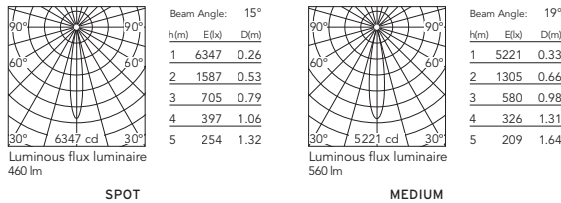

Eclectic Ø70 Adjustable

Ceiling Recessed Downlight

How to specify Eclectic Ø70 Adjustable SOFT


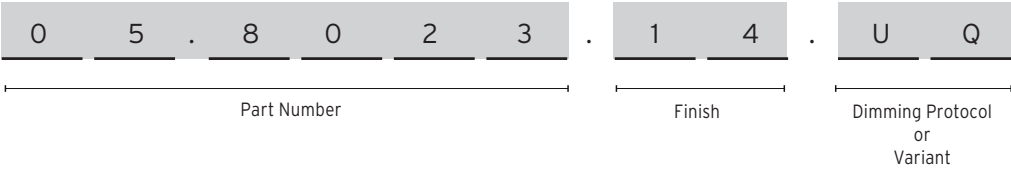


How to Specify ex. 05.8023.14.UQ + 08.0721.40 (luminaire + style module)



CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	408	15°	05.8023	<div>40 White</div> <div>14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				497	23°	05.8024		
				511	35°	05.8025		
3000	90	7.5	686	457	15°	05.8033	<div>40 White</div> <div>14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				557	23°	05.8034		
				572	35°	05.8035		

Photometrics

2700K

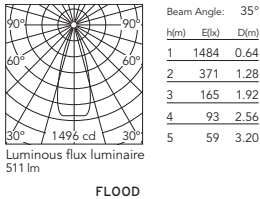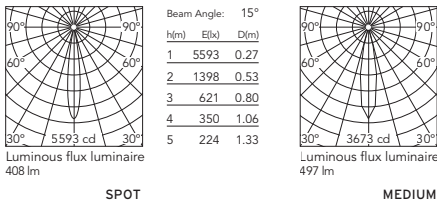


3000K

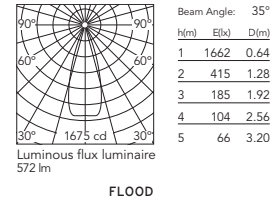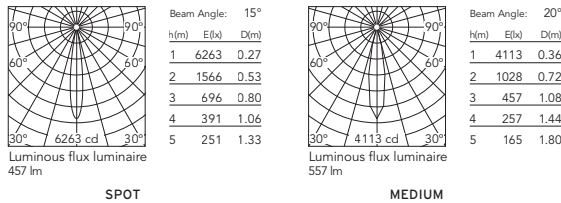

Eclectic Ø70 Adjustable

Ceiling Recessed Downlight

How to specify Eclectic Ø70 Adjustable FLAT

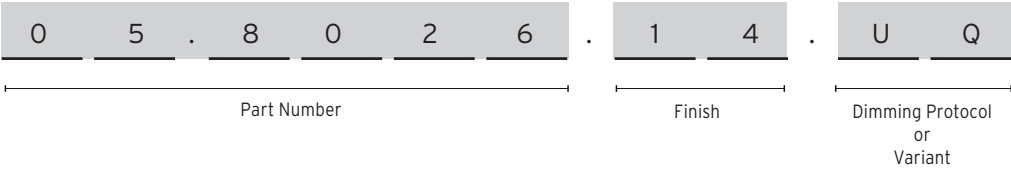


How to Specify ex. 05.8026.14.UQ + 08.0721.40 (luminaire + style module)


CCT	CRI	Watts	Initial Lumens	Delivered Lumens	Beam Angle	Part Number	Finish	Variant
2700	90	7.5	686	395	15°	05.8026	<div><div></div> 40 White</div> <div><div></div> 14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				448	23°	05.8027		
				501	35°	05.8028		
3000	90	7.5	686	444	15°	05.8036	<div><div></div> 40 White</div> <div><div></div> 14 Black</div>	UQ = Splice Box, 1% dim, 0-10V, 120V
				501	23°	05.8037		
				560	35°	05.8038		

Photometrics


2700K



SPOT




MEDIUM




FLOOD


3000K



SPOT



MEDIUM







FLOOD





Eclectic Ø70 Adjustable

Ceiling Recessed Downlight

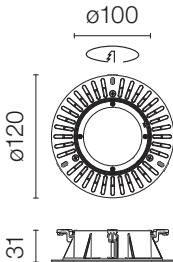Required Accessories

Trim Frame.	No Trim Frame.
<div><div><div></div><div>08.0670.40</div></div><div><div></div><div>08.0670.14</div></div></div>	08.0672.00
	
	












Optional Accessories

Honeycomb	Adjustable IP 54	Dichroic CCT Filter Increase 2700K >> 3125±75K 3000K >> 3600±75K	Dichroic CCT Filter Decrease 2700K >> 3125±75K 3000K >> 3600±75K	
08.0727.00	08.0729.00	08.0731.00	08.0732.00	
				

Eclectic Ø70 Adjustable

Ceiling Recessed Downlight

Spare Parts

<p>Lenses</p> <p>Optic Spot 08.0711.00</p> <p>Optic Medium 08.0712.00</p> <p>Optic Flood 08.0713.00</p> 	<p>Orientation Module</p> <p>08.0740.00</p> 	<p>Style Modules CONE</p> <p> 08.0721.40</p> <p> 08.0721.14</p> 
<p>Style Modules SOFT</p> <p> 08.0722.40</p> <p> 08.0722.14</p> 	<p>Style Modules FLAT</p> <p> 08.0723.40</p> <p> 08.0723.14</p> 	

Eclectic Ø70 Adjustable

Ceiling Recessed Downlight

Driver

Splice Box 600mA 1-10V, 120V

06.0399.00.90

