

Light Shadow Fixed, Trim 12L

NON-IC Ceiling Recessed Adjustable Downlight.

Description

Flos introduces Light Shadow, a revolution in low-glare lighting. A patented and unique optical solution in this new family reaches extreme cut off angles without sacrificing efficiency. The optics have been designed exclusively by FLOS and guarantee maximum control and uniformity of the beam. Light Shadow is a downlight that can be perfectly incorporated into any architecture because of its extraordinary compact size that allows the integration even when there is a minimum space. The collection is available in 2/4/8/or 12 spots, trimmed or trimless, and fixed or adjustable. It can be mounted in a continuous row. The Light Shadow 4 spot is also available as a light element for Running Magnet 2.0.

Lamp

Table with 2 columns: Specification (Lamp Type, Wattage, Initial Lumens, Color Temperature, Color rendering) and Value (LED, 32.4W, 3240lm, 3420lm, CRI 90).

Optical

Table with 2 columns: Specification (Beam Angle, Lighting Type, Light Distribution) and Value (10°, 22°/ 33°/ 45°, Direct, Symmetric).

Physical


Table with 2 columns: Specification (Material, Aiming, Weight, Ingress Protection Rating) and Value (Aluminum, Fixed, 1.3 Pounds, IP55).

Finishes:

Interior: White, Black, Copper, Steel, Bronze
Exterior: 40 White, 14 Black

Table with 2 columns: Specification (Installation type, Environment, Minimum Plenum height, Maximum Ceiling thickness) and Value (Ceiling Recessed - Non IC, Indoor, 4", 0.98").

Dimensions

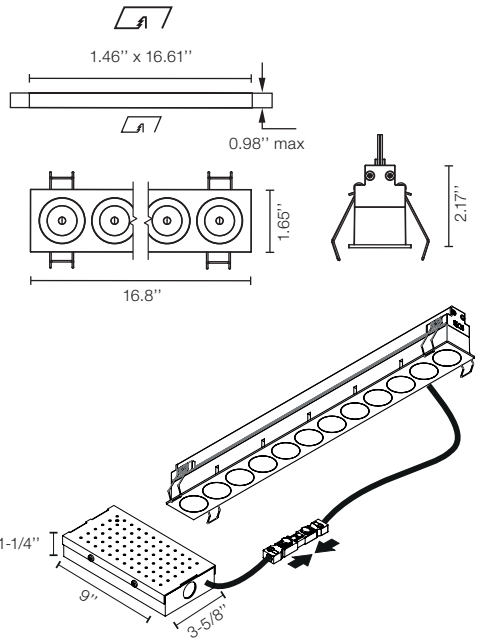

Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.



Light Shadow Fixed, Trim 12L

NON-IC Ceiling Recessed Adjustable Downlight.




Electrical & Control

Driver Input Voltage	120V or 277V (depending on Selected Splice Box)
Control	0-10V
Driver	Integral - Splice Box
Current	900mA

Performance

Delivered Lumens	From 2597m To 2888lm
Efficacy	89.1 lm/W

Dimensions

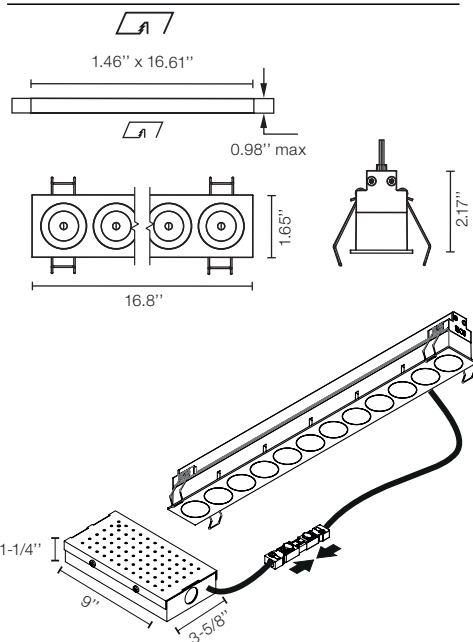

Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Splice Box is installed from below.

Non IC rated luminaire

Splice Box required has to be ordered separately always from FLOS. 2 Standard Options:

- 0-10V Dimming 120V
- 0-10V Dimming 277V

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Certifications



Photometrics


For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Fixed, Trim 12L
NON-IC Ceiling Recessed Adjustable Downlight.

How to specify

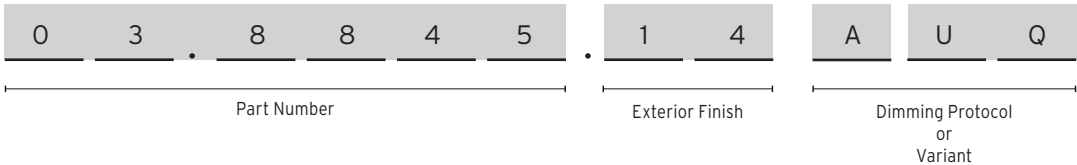

How to Specify ex. 03.8845.14AUQ

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Variant
2700	90	3240	32,4	10°	03.8845	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	AUQ = US product. Splice Box* not included. *Has to be Always supply by FLOS
					03.8844		White	
					05.1300		Copper	
					05.1301		Steel	
					05.1302		Bronze	
3000	90	3420	32,4	10°	03.8849	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	
					03.8848		White	
					05.1305		Copper	
					05.1306		Steel	
					05.1307		Bronze	
2700	90	3240	32,4	22°	03.9161	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	
					03.9160		White	
					05.1310		Copper	
					05.1311		Steel	
					05.1312		Bronze	
3000	90	3420	32,4	22°	03.9171	<div> <div>40 = White</div> <div>14 = Black</div> </div>	Black	
					03.9170		White	
					05.1315		Copper	
					05.1316		Steel	
					05.1317		Bronze	


Light Shadow Fixed, Trim 12L

NON-IC Ceiling Recessed Adjustable Downlight.

How to Specify ex. 03.9166.14AUQ

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Variant
2700	90	3240	32,4	33°	03.9166	40 = White 14 = Black	Black	AUQ = US product. Splice Box* not included. *Has to be Always supply by FLOS
					03.9165		White	
					05.1320		Copper	
					05.1321		Steel	
					05.1322		Bronze	
3000	90	3420	32,4	33°	03.9176	40 = White 14 = Black	Black	
					03.9175		White	
					05.1325		Copper	
					05.1326		Steel	
					05.1327		Bronze	
2700	90	3240	32,4	45°	03.8325	40 = White 14 = Black	Black	
					03.8324		White	
					05.1330		Copper	
					05.1331		Steel	
					05.1332		Bronze	
3000	90	3420	32,4	45°	03.8329	40 = White 14 = Black	Black	
					03.8328		White	
					05.1335		Copper	
					05.1336		Steel	
					05.1337		Bronze	

Photometrics

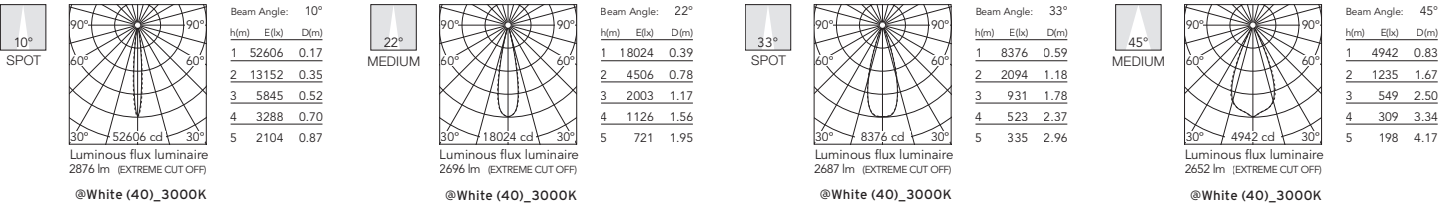

Light Shadow Fixed, Trim 12L

NON-IC Ceiling Recessed Adjustable Downlight.

Required Splice Box

Splice Box 40W, 1% dim, 0-10V, 120V. Size: 9" x 3.59" x 1.25"	Splice Box 40W, 1% dim, 0-10V, 277V. Size: 9" x 3.59" x 1.25"	
SP40W900MA-120-A01	SP40W900MA-277-A01	
