





Dimensions

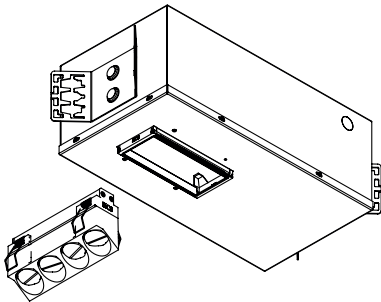

Certifications

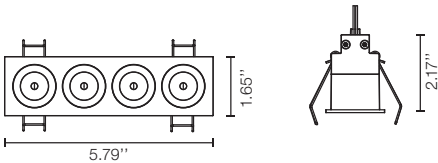

Class 2

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Wall-Washer, Trim 4L
Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.

Description

Flos introduces Light Shadow, a revolution in low-glare lighting. A patented and unique optical solution in this new family reaches extreme cut off angles without sacrificing efficiency. The optics have been designed exclusively by FLOS and guarantee maximum control and uniformity of the beam. Light Shadow is a downlight that can be perfectly incorporated into any architecture because of its extraordinary compact size that allows the integration even when there is a minimum space. The Airtight collection is available in 2 and 4 spots, trimmed or trimless, fixed adjustable and Wall Washer.

Lamp

Table with 2 columns: Lamp Type, Wattage, Initial Lumens, Color Temperature, Color rendering. Values include Power LED, 11W, 1026 lm, 1054 lm, 2700K, 3000K, CRI 90.

Optical

Table with 2 columns: Beam Angle, Lighting Type, Light Distribution. Values include 22°, Direct, Asymmetric.

Physical

Table with 2 columns: Material, Aiming, Weight. Values include Aluminum, Fixed, Fixture: 0.75 lb.

Table with 2 columns: Ingress Protection Rating. Value is IP23.



Table with 2 columns: Finishes. Values include 40 White, 14 Black.

Table with 2 columns: Installation type. Value is Ceiling Recessed.

Table with 2 columns: Environment. Value is Indoor.



Dimensions

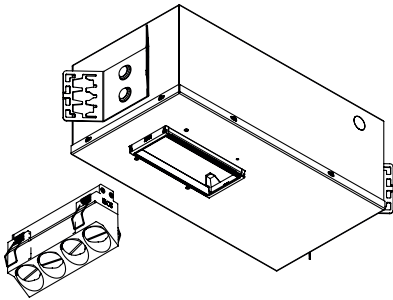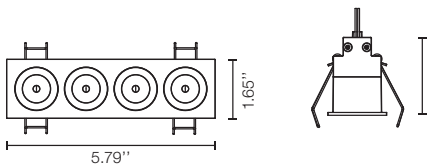

Certifications



Class 2

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Wall-Washer, Trim 4L
Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.

Electrical & Control

Driver Input Voltage	120 - 277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral - Housing
Current	900mA

Performance

Delivered Lumens	up to 756 lm / up to 762 lm
Efficacy	up to 69 lm/W


Notes

- Integral LED board is not field replaceable..
- Airtight Listed housing for new construction only.
- CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.
- IC-rated downlight for direct insulation contact.
- 3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Light Shadow Wall-Washer, Trim 4L Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.



How to specify

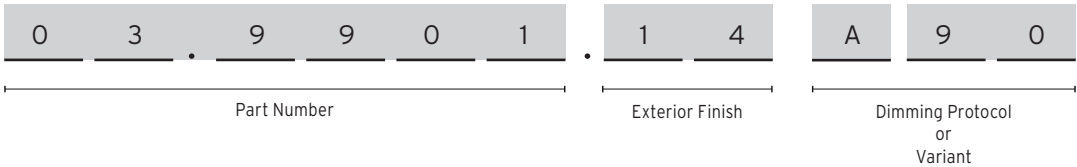

How to Specify ex. 03.9901.40A90

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Part Number	Exterior Finish	Variant
2700	90	1026	up to 756	11	03.9901	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	A90 : CCEA. Housing is required.
3000	90	1054	up to 762	11	03.9900	<input type="checkbox"/> 40 = White <input checked="" type="checkbox"/> 14 = Black	

Photometrics





Light Shadow Wall-Washer, Trim 4L Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.

Required Mounting Accessories

Light Shadow 4L fixed Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum	1 male, 1 female hanger bar Extendable from 14" to 24" centers. Qty required for housing is 2. Part number listed below is a Set of 2
Part Number: 08.7065.00A90	Part Number: 08.1201.00.UL

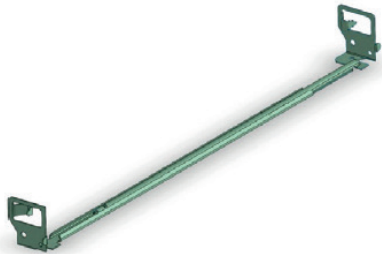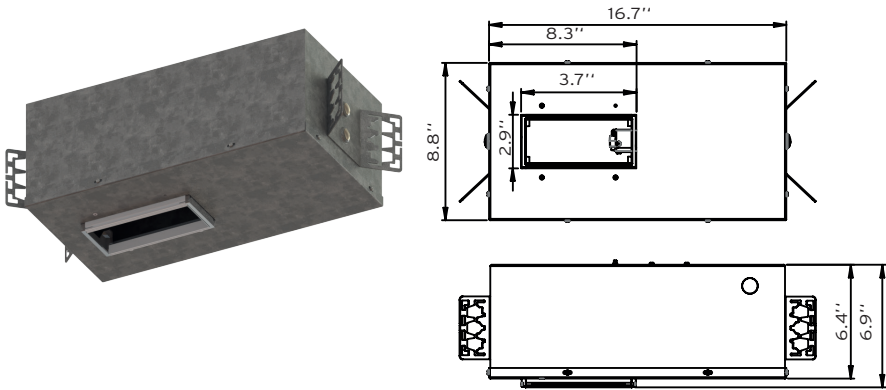

How to install

A. Select desired Part number

C. Position the fixture

B. Select required dimming protocol

In order to have a better performance position the Light fixture 0.8m-31.5inch from the wall and 0.8m-31.5inch space between two consecutive downlights

