


The Running Magnet 2.0 - Light Shadow

High-tech LED lighting system for interior architecture.

Light Shadow

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.

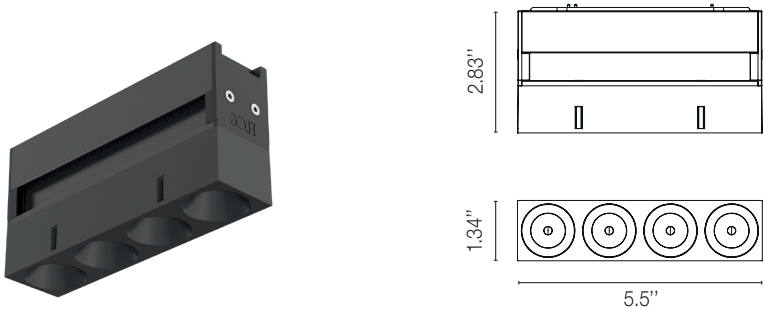

How to Specify ex. 03.8949.14C90

CCT	CRI	Initial Lumens*	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Dimming Protocol
2700K	90	1192 lm	10.8W	12°	03.8949	<div><div></div>40 = White</div> <div><div></div>14 = Black</div>	<div><div></div>Black</div>	C90 = Dimmable on board CDD = DALI C9V = 0-10V
					03.8948		<div><div></div>White</div>	
					05.1800		<div><div></div>Steel</div>	
					05.1801		<div><div></div>Bronze</div>	
					05.1802			
3000K	90	1272 lm	10.8W	12°	03.8953	<div><div></div>40 = White</div> <div><div></div>14 = Black</div>	<div><div></div>Black</div>	
					03.8952		<div><div></div>White</div>	
					05.1805		<div><div></div>Steel</div>	
					05.1806		<div><div></div>Bronze</div>	
					05.1807			
2700K	90	1192 lm	10.8W	23°	03.9621	<div><div></div>40 = White</div> <div><div></div>14 = Black</div>	<div><div></div>Black</div>	
					03.9620		<div><div></div>White</div>	
					05.1810		<div><div></div>Steel</div>	
					05.1811		<div><div></div>Bronze</div>	
					05.1812			
3000K	90	1272 lm	10.8W	23°	03.9631	<div><div></div>40 = White</div> <div><div></div>14 = Black</div>	<div><div></div>Black</div>	
					03.9630		<div><div></div>White</div>	
					05.1815		<div><div></div>Steel</div>	
					05.1816		<div><div></div>Bronze</div>	
					05.1817			

Delivered Lumens from 1020 lm to 1131 lm varies depending on the reflector finish, beam angle and CCT

The Running Magnet 2.0 - Light Shadow


High-tech LED lighting system for interior architecture.

How to Specify ex. 03.8949.14C90

CCT	CRI	Initial Lumens*	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Dimming Protocol
2700K	90	1192 lm	10.8W	29°	03.9626	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	<div><div></div> Black</div>	C90 = Dimmable on board CDD = DALI C9V = 0-10V
					03.9625		<div><div></div> White</div>	
					05.1820		<div><div></div> Steel</div>	
					05.1821		<div><div></div> Bronze</div>	
					05.1822			
3000K	90	1272 lm	10.8W	29°	03.9636	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	<div><div></div> Black</div>	
					03.9635		<div><div></div> White</div>	
					05.1825		<div><div></div> Steel</div>	
					05.1826		<div><div></div> Bronze</div>	
					05.1827			
2700K	90	1192 lm	10.8W	45°	03.9661	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	<div><div></div> Black</div>	
					03.9660		<div><div></div> White</div>	
					05.1830		<div><div></div> Steel</div>	
					05.1831		<div><div></div> Bronze</div>	
					05.1832			
3000K	90	1272 lm	10.8W	45°	03.9665	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	<div><div></div> Black</div>	
					03.9664		<div><div></div> White</div>	
					05.1835		<div><div></div> Steel</div>	
					05.1836		<div><div></div> Bronze</div>	
					05.1837			

* Delivered Lumens from 1020 lm to 1131 lm varies depending on the reflector finish, beam angle and CCT

Photometrics


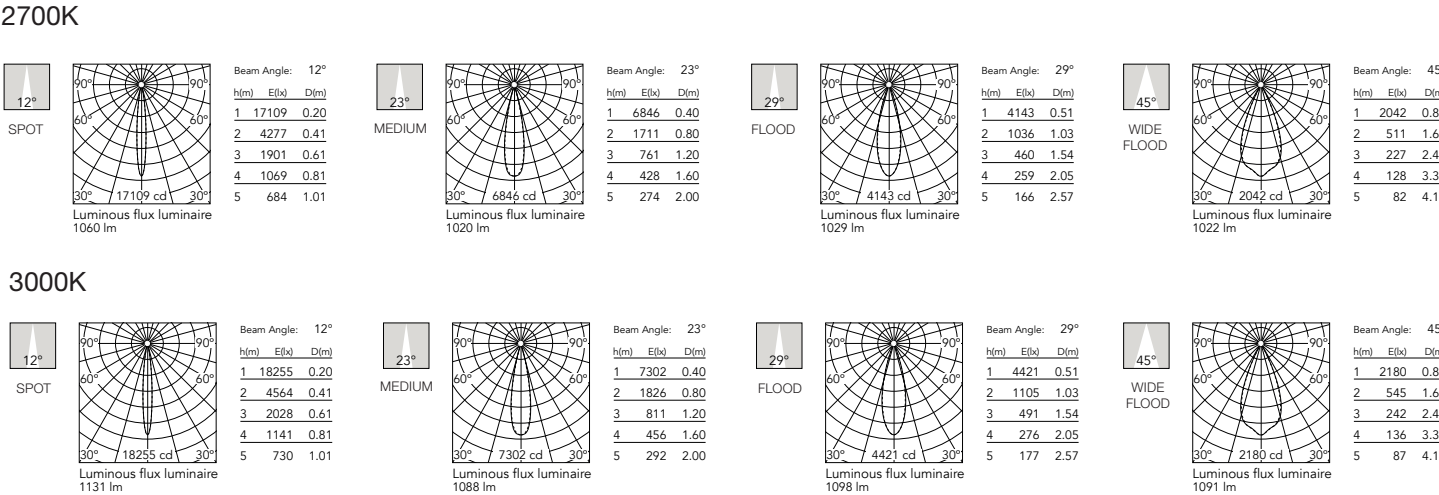


The Running Magnet 2.0 - Light Shadow Wall Washer

High-tech LED lighting system for interior architecture.


Light Shadow Wall-Washer

Accent lighting LED module to be installed in The Running Magnet 2.0 System. Built-in DC/DC electronic voltage converter. Built-in dimming knob on board fixture (from 39-100%), DALI and 0-10V (from 10-100%) Standard beam spread are 25° and 33°. Honeycomb and cross baffle included.



Beam Angle: 24°

h(m)	E(lx)	D(m)
1	1122	0.54
2	280	1.08
3	125	1.62
4	70	2.16
5	45	2.70



Beam Angle: 24°

h(m)	E(lx)	D(m)
1	1215	0.54
2	304	1.08
3	135	1.62
4	76	2.16
5	49	2.70

How to Specify ex. 03.9905.14C90

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Dimming Protocol
2700K	90	1176 lm	873 lm	10.8W	24°	03.9905	<div>40 = White</div> <div>14 = Black</div>	C90 = Dimmable on board CDD = DALI C9V = 0-10V
3000K	90	1280 lm	945 lm	10.8W	24°	03.9904	<div>40 = White</div> <div>14 = Black</div>	

How To Install

