





Dimensions

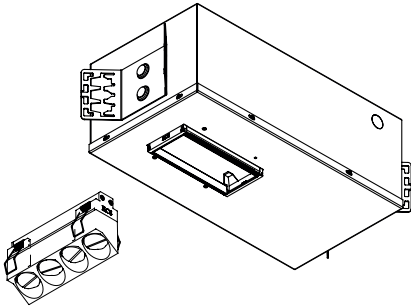

Certifications

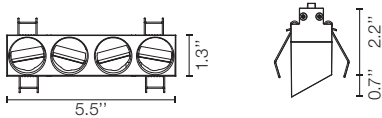

Class 2

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Wall-Washer, No Trim 4L
Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.

Description

Flos introduces Light Shadow, a revolution in low-glare lighting. A patented and unique optical solution in this new family reaches extreme cut off angles without sacrificing efficiency. The optics have been designed exclusively by FLOS and guarantee maximum control and uniformity of the beam. Light Shadow is a downlight that can be perfectly incorporated into any architecture because of its extraordinary compact size that allows the integration even when there is a minimum space. The Airtight collection is available in 2 and 4 spots, trimmed or trimless, fixed adjustable and Wall Washer.

Lamp

Lamps Type	Power LED
Wattage	11W
Initial Lumens	1026 lm, 1054 lm
Color Temperature	2700K, 3000K
Color rendering	CRI 90

Optical

Beam Angle	22°
Lighting Type	Direct
Light Distribution	Asymmetric

Physical

Material	Aluminum
Aiming	Fixed
Weight	Fixture: 0.75 lb

Ingress Protection Rating

IP20

Finishes:

☐ 40 White ☒ 14 Black



Installation type



Ceiling Recessed

Environment

Indoor



Dimensions

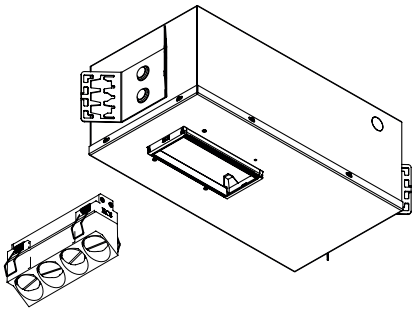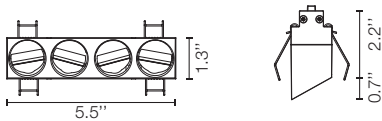

Certifications



Class 2

Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Light Shadow Wall-Washer, No Trim 4L
Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.

Electrical & Control

Driver Input Voltage	120 - 277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral on Housing
Current	900mA

Performance

Delivered Lumens	Up to 756 lm / up to 762 lm
Efficacy	Up to 69 lm/W

Notes

Integral LED board is not field replaceable.

Airtight Listed housing for new construction only.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.


IC-rated downlight for direct insulation contact.

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Light Shadow Wall-Washer, No Trim 4L Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.



How to specify

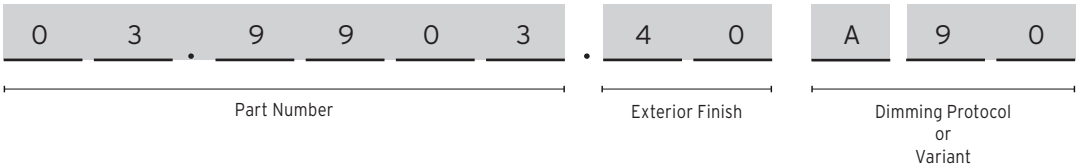

How to Specify ex. 03.9903.40A90

Table with 8 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Part Number, Exterior Finish, Variant. It lists two configurations for the 03.9903 series, one for 2700K and one for 3000K, both with 90 CRI and 11 Watts.

Photometrics

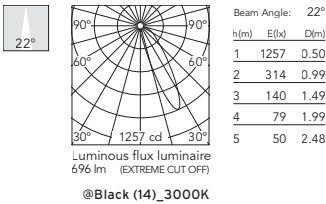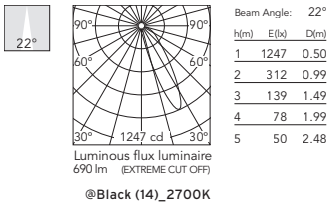

Light Shadow Wall-Washer, No Trim 4L Airtight - IC Rated

Ceiling Recessed Wall Washer Downlight.

Required Mounting Accessories

Table with 3 columns: Light Shadow 4L fixed Airtight Housing, Accessory Frame No Trim 4L Light Shadow Wall-Washer, and hanger bar. Includes part numbers (08.7065.00A90, 08.0511.00.90, 08.1201.00.UL) and 3D/2D images with dimensions.

How to install

A. Select desired Part number

B. Select required dimming protocol

C. Position the fixture

In order to have a better performance position the Light fixture 0.8m-31.5inch from the wall and 0.8m-31.5inch space between two consecutive downlights

