


Dimensions



Certifications

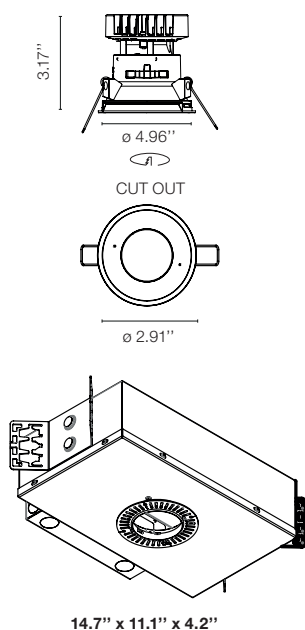

JAB-2019 CA
TITLE 24
LISTED



Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trimless Downlight

Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JAB-2019 CA Title 24 listed and CCEA Chicago Plenum.

Lamp

Lamps Type	LED ARRAY
Wattage	9.2W
Output Nominal	935 lm / 974 lm
Color Temperature	2700K - 3000K
Color rendering	CRI 90

Optical

Beam Angle	19°/ 26°/ 50° (white finish)
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable to 20°
Weight	0.53 Lbs
Ingress Protection Rating	IP54
Finishes	Painted lacquer

☐ B1 White ☒ 74 Black ☐ GL Matt Gold ☐ BU Blue ☐ CU Copper




Installation type

Ceiling Recessed

Environment

Indoor dry location

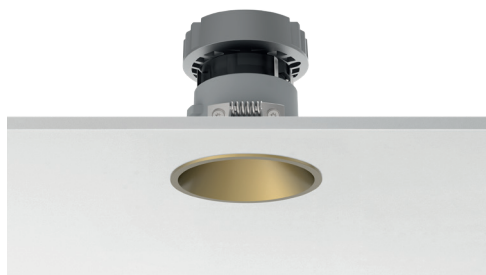

EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trimless Downlight


Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral on housing
Current	500mA


Performance

Maximum delivered output	704 lm
Efficacy	71 lm/W

Dimensions



CUT OUT



14.7" x 11.1" x 4.2"

Notes

Integral LED. COB is not field replaceable.

Softening diffuser accessory provided.

IP54 - Suitable for Damp locations.

Airtight Listed housing for new construction only.

JA8-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

Certifications



JA8-2019 CA
TITLE 24
LISTED



Photometrics

For current IES files please visit
architectural.flosusa.com


Warranty

2 years from date of sale.

EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trimless Downlight

How to specify

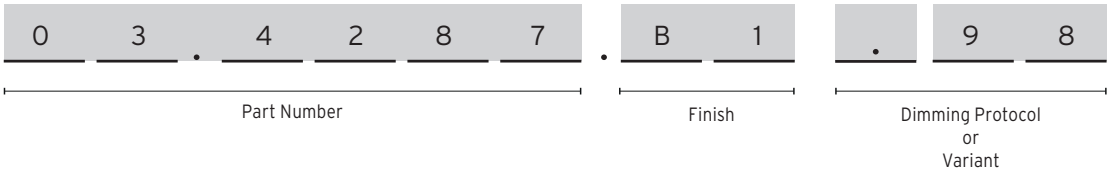

How to Specify ex. 03.4287.B1.98


Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
03.4287	3000	90	974	9,2W	19°	<div><div></div> B1 = White</div> <div><div></div> 74 = Black</div> <div><div></div> GL = Gold</div> <div><div></div> BL = Blue</div> <div><div></div> CU = Copper</div>	.98 : CCEA, JA8-2019 CA Title 24 listed downlight, Housing is required.
03.4288	2700		935				
03.4192	3000		974		26°		
03.4193	2700		935				
03.4297	3000		974		50°		
03.4298	2700		935				

EasyKap 80 Round Fixed Airtight - IC Rated


Ceiling Recessed Trimless Downlight

Photometries Optic Spot


□ B1 White




■ 74 Black




■ GL Matt Gold



■ BU Blue




■ CU Copper




Photometries Optic Medium


□ B1 White




■ 74 Black




■ GL Matt Gold



■ BU Blue




■ CU Copper




Photometries Optic Flood


□ B1 White




■ 74 Black




■ GL Matt Gold



■ BU Blue



■ CU Copper



EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trimless Downlight

Required Housing and Hanger Bar

Kap 80 Airtight Housing for New construction, Integral 0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum	
08.7060.00.90	1 male, 1 female hanger bar Extendable from 14" to 24" centers. Qty required 2
	HOUS-HB

