



## EasyKap 80 Squared Adjustable Airtight - IC Rated



Ceiling Recessed Trimless Downlight

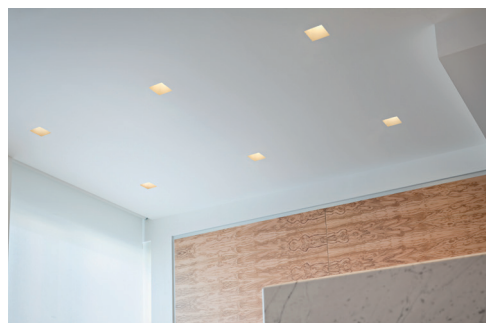

### Dimensions



CUT OUT



### Certifications



JAB-2019 CA  
TITLE 24  
LISTED



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.

### Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JAB-2019 CA Title 24 listed and CCEA Chicago Plenum.

### Lamp

Lamps Type	LED ARRAY
Wattage	9.2W
Output Nominal	935lm, 974lm
Color Temperature	2700K, 3000K
Color rendering	CRI 90

### Optical

Beam Angle	18°/ 25°/ 53° (white finish)
Lighting Type	Direct
Light Distribution	Symmetric

### Physical

Material	Aluminum
Aiming	Adjustable to 20°
Weight	0.53 Lbs
Ingress Protection Rating	IP54
Finishes	Painted lacquer

☐ B1 White

☐ 74 Black

☐ GL Matt Gold

☐ BU Blue

☐ CU Copper




### Installation type

Ceiling Recessed

### Environment

Indoor dry location



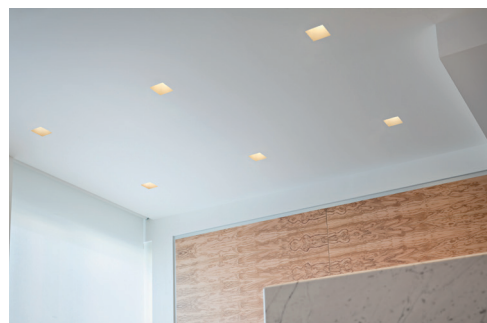

## EasyKap 80 Squared Adjustable Airtight - IC Rated

Ceiling Recessed Trimless Downlight




### Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral on housing
Current	500mA

### Performance

Maximum delivered output	771lm
Efficacy	83lm/W

### Dimensions



### Notes

Integral LED. COB is not field replaceable.

Softening diffuser accessory provided.

IP54 - Suitable for Damp locations.

Airtight Listed housing for new construction only.

JA8-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

### Certifications



JA8-2019 CA  
TITLE 24  
LISTED



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.


FLOS. USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011



EasyKap 80 Squared Adjustable Airtight - IC Rated

Ceiling Recessed Trimless Downlight

How to specify

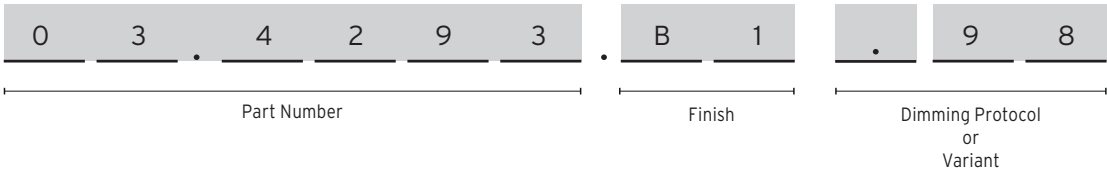

How to Specify      ex. 03.4293.B1.98

Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
03.4293	3000	90	974	9.2W	18°	<div><div></div> B1 = White</div> <div><div></div> 74 = Black</div> <div><div></div> GL = Gold</div> <div><div></div> BL = Blue</div> <div><div></div> CU = Copper</div>	.98 : CCEA, JA8-2019 CA Title 24 listed downlight, Housing is required.
03.4294	2700		935				
03.4200	3000		974		25°		
03.4201	2700		935				
03.4544	3000		974		53°		
03.4545	2700		935				




## EasyKap 80 Squared Adjustable Airtight - IC Rated

Ceiling Recessed Trimless Downlight


### Photometries Optic Spot

#### □ B1 White




@3000K

#### ■ 74 Black




@3000K

#### ■ GL Matt Gold




@3000K

#### ■ BU Blue



@3000K


#### ■ CU Copper



@3000K


### Photometries Optic Medium

#### □ B1 White




@3000K

#### ■ 74 Black




@3000K

#### ■ GL Matt Gold




@3000K

#### ■ BU Blue



@3000K


#### ■ CU Copper



@3000K


### Photometries Optic Flood

#### □ B1 White




@3000K

#### ■ 74 Black




@3000K

#### ■ GL Matt Gold




@3000K

#### ■ BU Blue



@3000K

#### ■ CU Copper



@3000K



EasyKap 80 Squared Adjustable Airtight - IC Rated

Ceiling Recessed Trimless Downlight

Required Housing and Hanger Bar

EasyKap 80 Airtight Housing for New construction, Integral  
0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum

08.7062.00.90

1 male, 1 female hanger bar  
Extendable from 14" to 24"  
centers. Qty required 2

HOUS-HB

