


EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trimless Downlight




Dimensions




ø 2.95"

CUT OUT



ø 3.14"

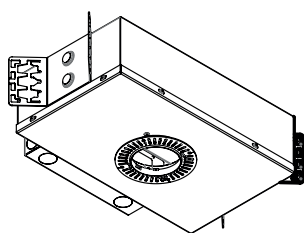

14.7" x 11.1" x 4.2"

Certifications



JAB-2019 CA
TITLE 24
LISTED



Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JAB-2019 CA Title 24 listed and CCEA Chicago Plenum.

Lamp

Lamps Type	LED ARRAY
Wattage	9.2W
Output Nominal	935lm, 974lm
Color Temperature	2700K, 3000K
Color rendering	CRI 90

Optical

Beam Angle	28°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Wall Washer
Weight	0.6 Lbs
Ingress Protection Rating	IP54

Finishes

Painted lacquer

☐ B1 White

☐ 74 Black

☐ GL Matt Gold

☐ BU Blue

☐ CU Copper



Installation type

Ceiling Recessed

Environment

Indoor dry location

EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trimless Downlight




Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral on housing
Current	500mA

Performance


Maximum delivered output	622lm
Efficacy	67.6lm/W

Dimensions




ø 2.95"

CUT OUT



ø 3.14"

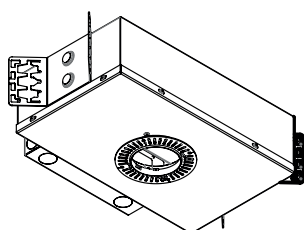

14.7" x 11.1" x 4.2"

Notes

Integral LED. COB is not field replaceable by the final user.

Softening diffuser accessory provided.

IP54 - Suitable for Damp locations.

Airtight Listed housing for new construction only.

JA8-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

Certifications



JA8-2019 CA
TITLE 24
LISTED



Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty


2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trimless Downlight


How to specify

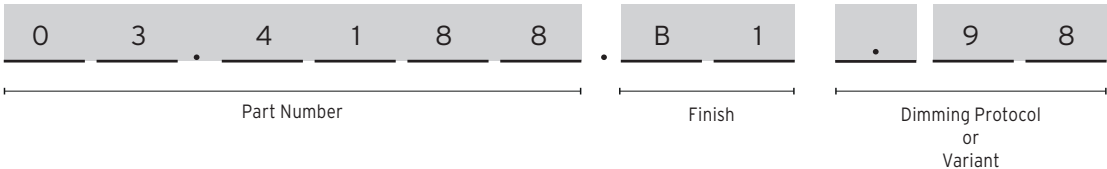

How to Specify ex. 03.4188.B1.98

Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
03.4188	3000	90	974	9,2W	28°	<div><div>B1 = White</div><div>74 = Black</div><div>GL = Gold</div><div>BL = Blue</div><div>CU = Copper</div></div>	.98 : CCEA, JA8-2019 CA Title 24 listed downlight. Housing is required.
03.4189	2700	90	935				

Photometries

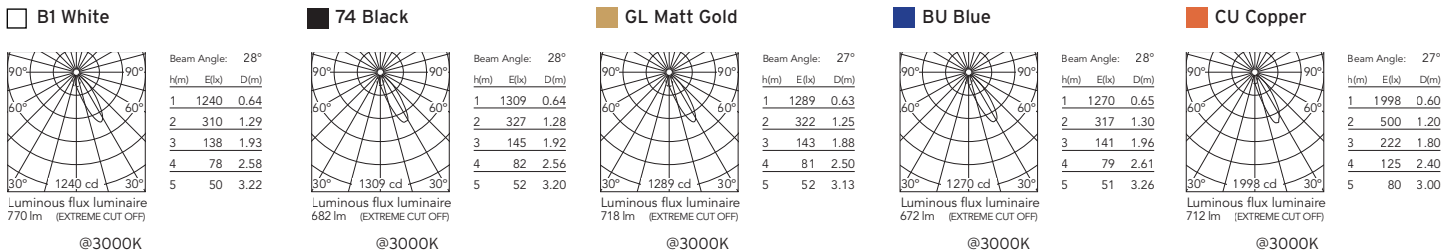

EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trimless Downlight

Required Housing and Hanger Bar

Kap 80 Airtight Housing for New construction, Integral 0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum	1 male, 1 female hanger bar Extendable from 14" to 24" centers. Qty required 2
08.7060.00.90	HOUS-HB

