




## Dimensions



## Certifications

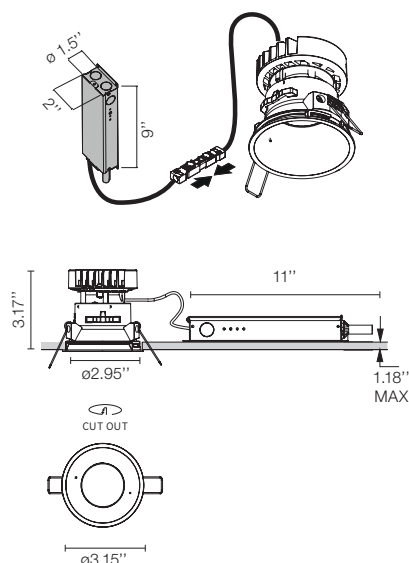

## Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

## Warranty

2 years from date of sale.

## EasyKap 80 (ø3.2") Round Fixed NON-IC

NON-IC Ceiling Recessed Trimless Downlight

### Description

LED luminaire for recessed mounting into plasterboard ceilings. The Easy Kap version has an aluminium injected body with a liquid paint, dust and/or metallic copper finish with a plastic diffuser included. It does not need a pre-installation frame. Thanks to remote-phosphor technology, the LED modules of the Phosphor LED version offer maximum quality light, the perception of objects and spaces, reaching chromatic reproduction indices of 90. The LED modules installed on the LED Array versions have cutting-edge technology that permits a lower average temperature in the electronics. Thanks to this feature, the luminaire can operate at a higher power inside the safety parameters yet still offer 20% added luminous flux.

### Lamp

Lamps Type LED ARRAY

Wattage 9.2W

Output Nominal 935 lm / 974 lm

Color Temperature 2700K - 3000K

Color rendering CRI 90

### Optical

Beam Angle 19°/ 26°/ 50° (white finish)

Lighting Type Direct

Light Distribution Symmetric

### Physical

Material Aluminum

Aiming Adjustable to 20°

Weight 7.77 Lbs

Ingress Protection Rating IP54

Finishes Painted lacquer

☐ B1 White ☐ 74 Black ☐ GL Matt Gold ☐ BU Blue ☐ CU Copper



Installation type

Ceiling Recessed Non IC, 11" recommended ceiling space to install

Environment

Indoor dry location



## EasyKap 80 (ø3.2") Round Fixed NON-IC

NON-IC Ceiling Recessed Trimless Downlight


### Electrical & Control

|               |                                  |
|---------------|----------------------------------|
| Input Voltage | 120-277V                         |
| Control       | Standard 0-10V dimming 1% linear |
| Driver        | Driver in splice box             |
| Current       | 500mA                            |

### Performance

|                  |                          |
|------------------|--------------------------|
| Delivered lumens | from 472 lm up to 732 lm |
| Efficacy         | 80 lm/W                  |

### Dimensions

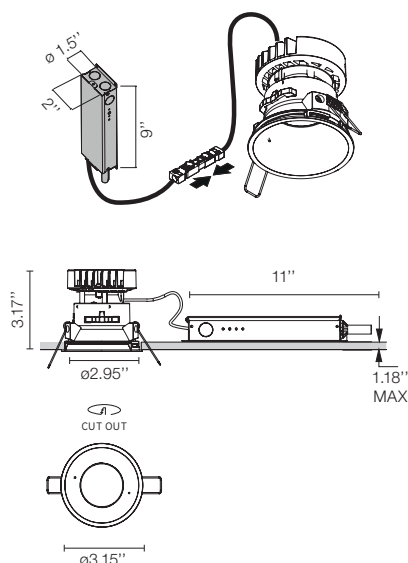

### Notes

Pre-installation frame has to be ordered separately

Non IC rated luminaire

Ceiling Recessed Non IC, 11" recommended ceiling space to install.

Driver must be ordered separately. 3 Options:

- 0-10V Dimming 120V
- 0-10v Dimming 277 V
- ELV Dimming 120 V

Available in 5 different finishes: Black, White, Gold, Copper and Blue

Maximum tilt angle for the Kap 80 (3.2") adjustable version is 20°

LED included not replaceable

Listings: UL listed, IP44

### Certifications



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)


### Warranty

2 years from date of sale.

EasyKap 80 (ø3.2") Round Fixed NON-IC

NON-IC Ceiling Recessed Trimless Downlight

How to specify

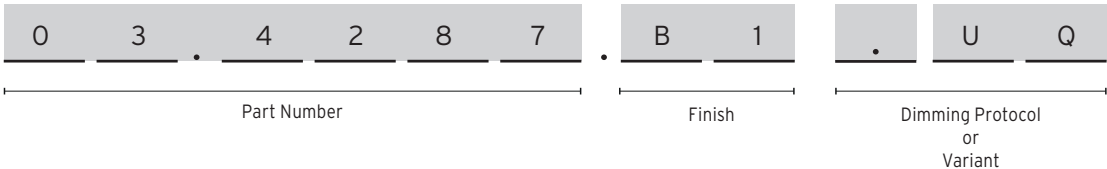

How to Specify      ex. 03.4287.B1.98


| Part Number | CCT  | CRI | Initial Lumens | Watts | Beam Angle | Finish   | Variant   |
|-------------|------|-----|----------------|-------|------------|--|---|
| 03.4287     | 3000 | 90  | 974            | 9,2W  | 19°        | <div><div></div> B1 = White</div> <div><div></div> 74 = Black</div> <div><div></div> GL = Gold</div> <div><div></div> BL = Blue</div> <div><div></div> CU = Copper</div> | UQ = US product. Splice Box* not included<br><br>*Has to be Always supply by FLOS |
| 03.4288     | 2700 |     | 935            |       |            |  |   |
| 03.4192     | 3000 |     | 974            |       | 26°        |  |   |
| 03.4193     | 2700 |     | 935            |       |            |  |   |
| 03.4297     | 3000 |     | 974            |       | 50°        |  |   |
| 03.4298     | 2700 |     | 935            |       |            |  |   |

## EasyKap 80 (ø3.2") Round Fixed NON-IC


NON-IC Ceiling Recessed Trimless Downlight

### Photometries Optic Spot


#### □ B1 White




#### ■ 74 Black




#### ■ GL Matt Gold



#### ■ BU Blue




#### ■ CU Copper




### Photometries Optic Medium


#### □ B1 White




#### ■ 74 Black




#### ■ GL Matt Gold



#### ■ BU Blue




#### ■ CU Copper




### Photometries Optic Flood


#### □ B1 White




#### ■ 74 Black




#### ■ GL Matt Gold



#### ■ BU Blue



#### ■ CU Copper




EasyKap 80 (ø3.2'') Round Fixed NON-IC

NON-IC Ceiling Recessed Trimless Downlight

Required Splice Box


Splice Box 14W, 20% dim, ELV, 120V. Size: 9'' x 2'' x 1.5''

SP14W500MA-ELV-E01

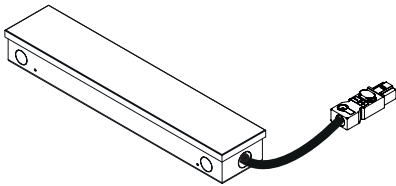


Splice Box 20W, 1% dim, 0-10V, 120V. Size: 9'' x 2'' x 1.5''

SP20W500MA-120-V01

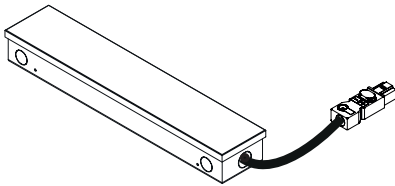

Splice Box 14W, 1% dim, 0-10V, 277V . Size: 9'' x 2'' x 1.5''

SP14W500MA-277-V01

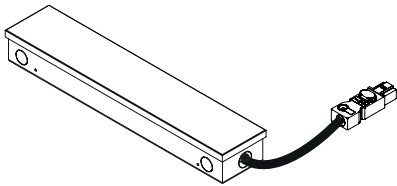

Optional Accessories

Registration Tray -non electrical, place holder for non IC new construction, ø 2.95

TRAY-0001

