 ADA Compliant
Suitable for Wet locations

Photometrics

For current IES files please visit
professional.flos.com/en-US/us

Warranty

2 years from date of sale.

Spine F 2 Absolute

Outdoor luminaire designed by Vincent Van Duysen

Description

Family of outdoor, professional and adjustable projectors designed by Vincent Van Duysen. The product is characterized by a minimalist and elegant design suitable for the most varied contexts, from residential to hotel environments.

Lamp

| | |
|-------------------|------------------|
| Lamps Type | CoB LED |
| Wattage | 19.5 W |
| Output Nominal | 2367 lm, 2497 lm |
| Color Temperature | 3000K, 4000K |
| Color rendering | CRI80 |

Optical

| | |
|--------------------|-----------|
| Beam Angle | 22° , 43° |
| Lighting Type | Direct |
| Light Distribution | Symmetric |


Physical

| | |
|---------------------------|----------------|
| Material | Aluminum |
| Aiming | Adjustable |
| Weight | 2.2 Pounds |
| Ingress Protection Rating | IP66 |
| Finishes | Powder Coating |


 18 Deep Brown  30 Black



Finishes 01 White, 06 Grey, 12 Forest Green and
33 Anthracite, available on request.



| | |
|-------------------|------------------------|
| Installation type | Ground |
| Environment | Outdoor / Wet location |

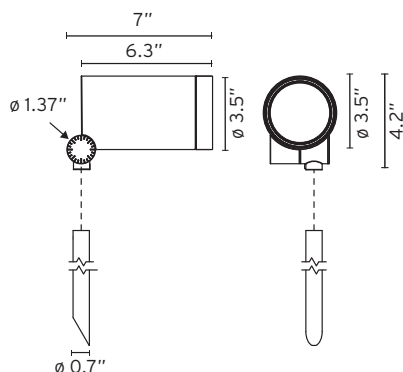

Spine F 2 Absolute

Outdoor luminaire designed by Vincent Van Duysen

Electrical & Control

| | |
|---------|------------------------|
| Voltage | 120 - 277V |
| Control | Non Dimmable and 1-10V |
| Driver | Integrated |

Performance

| | |
|--------------------------|------------------|
| Maximum delivered output | 2085 lm, 2120 lm |
| Efficacy | 112.6 lm/W |

Notes

Painted versions are an exterior rated epoxy polyester powder coat finish for superior strength, heat and UV resistance.

During installation and maintenance avoid scratching or damaging the finish as it may result in premature corrosion of metal surfaces. Avoid cleaning fixtures with corrosive chemicals as it may result in voiding the warranty.

LED fixtures are highly susceptible to failure due to electrical effects from poor connections, and electrical short circuits. These are frequently caused by (a) overvoltage from primary voltage sources, (b) electrostatic discharge from the exterior environment.

Ensure that all outdoor fixtures are installed on GFI circuits as required by code, and use proper surge protecting devices to avoid irreversible damages to electrical components.

2700K available on request.

Certifications



ADA Compliant

Suitable for Wet locations

Photometrics

For current IES files please visit professional.flos.com/en-US/us


Warranty

2 years from date of sale.


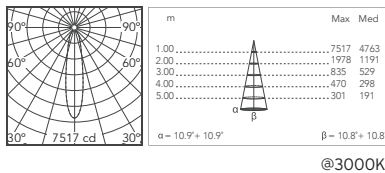




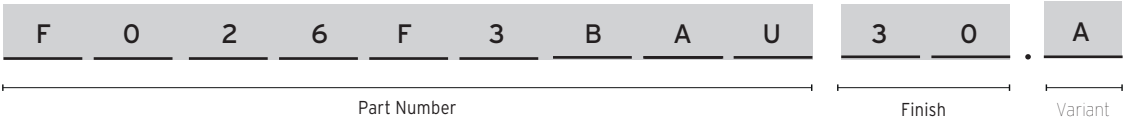


Spine F 2 Absolute

Outdoor luminaire designed by Vincent Van Duysen

How to specify



Spine F 2 Absolute - Optic Spot


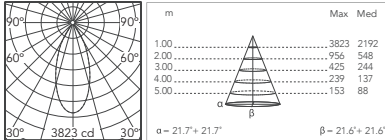







| Part Number | Finish | CCT | Watts | Initial Lumens | Delivered Lumens | Beam Angle | CRI | Control | Photometrics | | | | | |
|---------------|--|------|-------|----------------|------------------|------------|-----|----------------|---|--|--|--|--|--|
| F026F3BAU30.A |  Black | 3000 | 19.5 | 2367 | 2085 | 22° | 80 | Non Dimmable |  | | | | | |
| F026F3BAU18.A |  Deep Brown | | | | | | | | | | | | | |
| F026F4BAU30.A |  Black | 4000 | 19.5 | 2497 | 2120 | | | | | | | | | |
| F026F4BAU18.A |  Deep Brown | | | | | | | | | | | | | |
| F026F3BBU30.A |  Black | 3000 | 19.5 | 2367 | 2085 | 22° | 80 | Dimmable 1-10V | | | | | | |
| F026F3BBU18.A |  Deep Brown | | | | | | | | | | | | | |
| F026F4BBU30.A |  Black | 4000 | 19.5 | 2497 | 2120 | | | | | | | | | |
| F026F4BBU18.A |  Deep Brown | | | | | | | | | | | | | |

Spine F 2 Absolute

Outdoor luminaire designed by Vincent Van Duysen

How to specify

Spine F 2 Absolute - Optic Medium

| Part Number | Finish | CCT | Watts | Initial Lumens | Delivered Lumens | Beam Angle | CRI | Control | Photometrics |
|---------------|--|------|-------|----------------|------------------|------------|-----|----------------|---|
| F026F3CAU30.A |  Black | 3000 | 19.5 | 2367 | 2178 | 43° | 80 | Non Dimmable |  |
| F026F3CAU18.A |  Deep Brown | | | | | | | | |
| F026F4CAU30.A |  Black | 4000 | 19.5 | 2497 | 2298 | | | | |
| F026F4CAU18.A |  Deep Brown | | | | | | | | |
| F026F3CBU30.A |  Black | 3000 | 19.5 | 2367 | 2178 | 43° | 80 | Dimmable 1-10V | |
| F026F3CBU18.A |  Deep Brown | | | | | | | | |
| F026F4CBU30.A |  Black | 4000 | 19.5 | 2497 | 2298 | | | | |
| F026F4CBU18.A |  Deep Brown | | | | | | | | |

Spine F 2 Absolute

Outdoor luminaire designed by Vincent Van Duysen

Optional Accessories

Honeycomb

F026Z060000

