

Light Shadow Adjustable, Trim 8L NON-IC

Ceiling Recessed Adjustable Downlight.

Description

Flos introduces Light Shadow, a revolution in low-glare lighting. A patented and unique optical solution in this new family reaches extreme cut off angles without sacrificing efficiency. The optics have been designed exclusively by FLOS and guarantee maximum control and uniformity of the beam. Light Shadow is a downlight that can be perfectly incorporated into any architecture because of its extraordinary compact size that allows the integration even when there is a minimum space. The collection is available in 2/4/8/ or 12 spots, trimmed or trimless, and fixed or adjustable. It can be mounted in continuous row. The Light Shadow 4 spot is also available as a light element for Running Magnet 2.0.

Lamp

Lamp Type	LED
Wattage	21.6W
Initial Lumens	2384 lm, 2544 lm
Color Temperature	2700K, 3000K, 3500K* (See Notes)
Color rendering	CRI 90

Optical

Beam Angle	12°/ 23°/ 29°/ 45°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable 30° 
Weight	1.1 Pounds
Ingress Protection Rating	IP20


Finishes:

Exterior:




Interior:

☐ White ☐ Black ☐ Steel ☐ Bronze

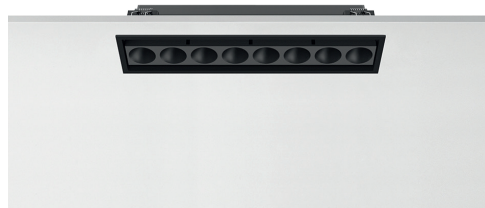

Dimensions

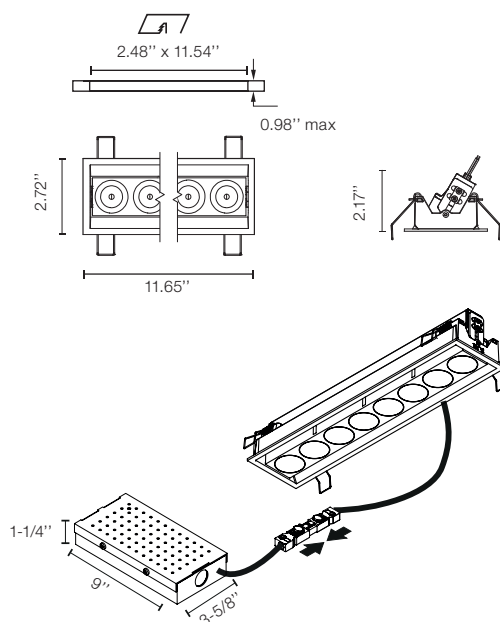

Certifications



Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

FLOS, USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

For more information contact your representative or go to professional.flos.com/en-US/us/
©2026 Specifications and dimensions subject to change without notice. Issued 02.16.2026



Light Shadow Adjustable, Trim 8L NON-IC

Ceiling Recessed Adjustable Downlight.




Electrical & Control

Driver Input Voltage	120V or 277V (depending on Selected Splice Box)
Control	0-10V and ELV
Driver	Integral - Splice Box
Current	900mA

Performance

	up to 2120 lm / up to 2262 lm
Delivered Lumens	up to 104 lm/W
Efficacy	

Dimensions

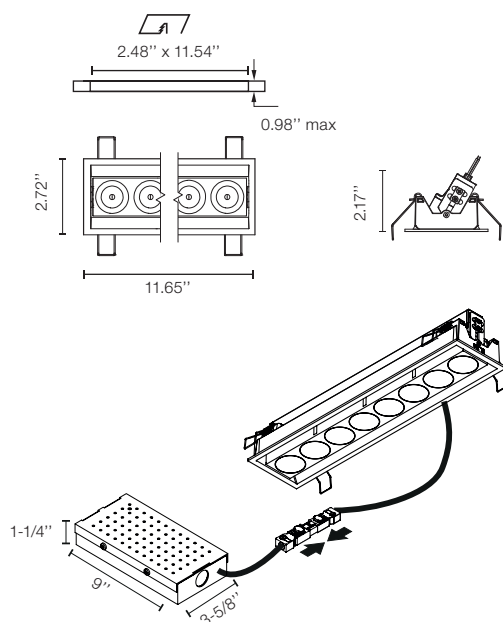

Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Splice Box is installed from below.

Non IC rated luminaire

Splice Box required has to be ordered separately always from FLOS. 3 Standard Options:

- 0-10V Dimming 120V
- 0-10V Dimming 277V
- ELV Dimming 120V

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com


Warranty

2 years from date of sale.

Light Shadow Adjustable, Trim 8L NON-IC

Ceiling Recessed Adjustable Downlight.

How to specify

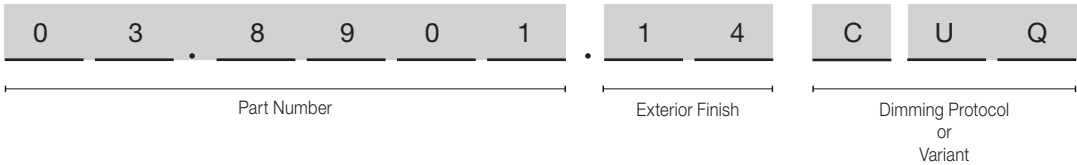

How to Specify ex. 03.8901.14CUQ

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Variant
2700	90	2384	21.6	12°	03.8901	40 = White 14 = Black	Black	CUQ = US product. Splice Box* not included. *Has to be Always supply by FLOS
					03.8900		White	
					05.1601		Steel	
					05.1602		Bronze	
3000	90	2544	21.6	12°	03.8905	40 = White 14 = Black	Black	
					03.8904		White	
					05.1606		Steel	
					05.1607		Bronze	
2700	90	2384	21.6	23°	03.9341	40 = White 14 = Black	Black	
					03.9340		White	
					05.1611		Steel	
					05.1612		Bronze	
3000	90	2544	21.6	23°	03.9351	40 = White 14 = Black	Black	
					03.9350		White	
					05.1616		Steel	
					05.1617		Bronze	


Light Shadow Adjustable, Trim 8L NON-IC

Ceiling Recessed Adjustable Downlight.

How to Specify ex. 03.9346.14CUQ

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Variant
2700	90	2384	21.6	29°	03.9346	40 = White 14 = Black	Black	CUQ = US product. Splice Box* not included. *Has to be Always supply by FLOS
					03.9345		White	
					05.1621		Steel	
					05.1622		Bronze	
3000	90	2544	21.6	29°	03.9356	40 = White 14 = Black	Black	
					05.1625		White	
					05.1626		Steel	
					05.1627		Bronze	
2700	90	2384	21.6	45°	03.7317	40 = White 14 = Black	Black	
					03.7316		White	
					05.1631		Steel	
					05.1632		Bronze	
3000	90	2544	21.6	45°	03.7321	40 = White 14 = Black	Black	
					03.7320		White	
					05.1636		Steel	
					05.1637		Bronze	

Photometrics

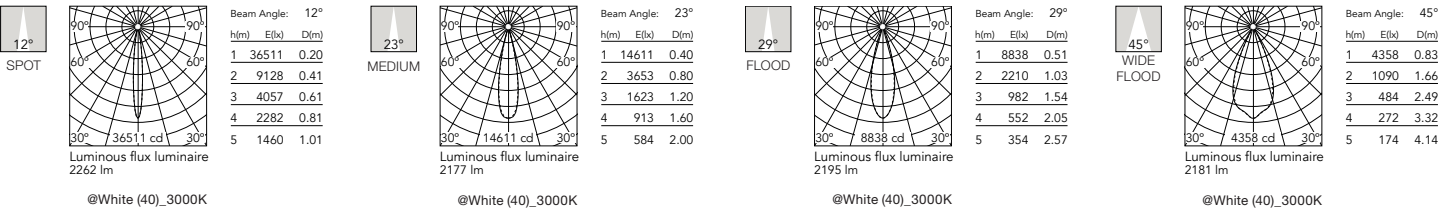

Light Shadow Adjustable, Trim 8L NON-IC

Ceiling Recessed Adjustable Downlight.

Required Splice Box

Splice Box 25W, 1% dim, 0-10V, 120V. Size: 9" x 3.59" x 1.25"	Splice Box 25W, 1% dim, 0-10V, 277V. Size: 9" x 3.59" x 1.25"	Splice Box 30W, 20% dim, ELV, 120V. Size: 9" x 3.59" x 1.25"
SP25W900MA-120-A01	SP25W900MA-277-A01	SP30W900MA-ELV-U01
