


Light Shadow Adjustable, Trim 2L NON-IC

Ceiling Recessed Adjustable Downlight.



Dimensions

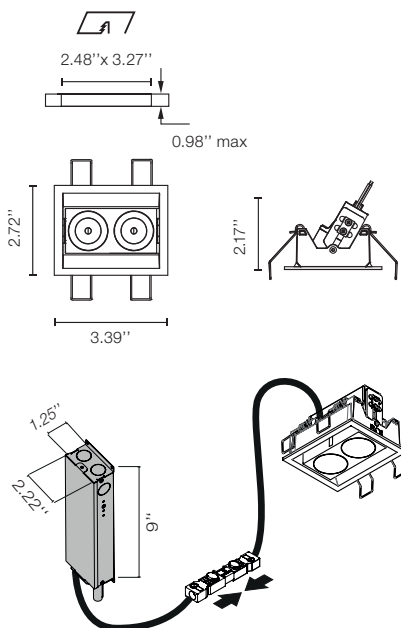

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Description

Flos introduces Light Shadow, a revolution in low-glare lighting. A patented and unique optical solution in this new family reaches extreme cut off angles without sacrificing efficiency. The optics have been designed exclusively by FLOS and guarantee maximum control and uniformity of the beam. Light Shadow is a downlight that can be perfectly incorporated into any architecture because of its extraordinary compact size that allows the integration even when there is a minimum space. The collection is available in 2/4/8/or 12 spots, trimmed or trimless, and fixed or adjustable. It can be mounted in a continuous row. The Light Shadow 4 spot is also available as a light element for Running Magnet 2.0.

Lamp

Lamp Type	LED
Wattage	7W
Initial Lumens	596 lm, 636 lm
Color Temperature	2700K, 3000K, 3500K* (See Notes)
Color rendering	CRI 90

Optical

Beam Angle	12°/ 23°/ 29°/ 45°
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable 30° 
Weight	Fixture: 0.55 Pounds
Ingress Protection Rating	IP20

Finishes:

Exterior:



Interior:

☐ White ☒ Black ☐ Steel ☐ Bronze



Installation type	Ceiling Recessed - Non IC
Environment	Indoor
Minimum Plenum height	6"
Maximum Ceiling thickness	0.98"

Light Shadow Adjustable, Trim 2L NON-IC

Ceiling Recessed Adjustable Downlight.




Electrical & Control

Driver Input Voltage	120V or 277V (depending on Selected Splice Box)
Control	0-10V and ELV
Driver	Integral - Splice Box
Current	900mA

Performance

Delivered Lumens	up to 557 lm / up to 566 lm
Efficacy	up to 80 lm/W

Dimensions

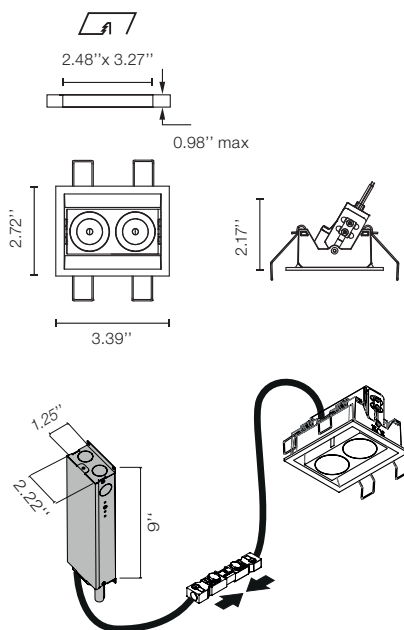

Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Splice Box is installed from below.

Non IC rated luminaire

Splice Box required has to be ordered separately always from FLOS. 3 Standard Options:

- 0-10V Dimming 120V
- 0-10V Dimming 277V
- ELV Dimming 120V

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty


2 years from date of sale.

FLOS, USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

Light Shadow Adjustable, Trim 2L NON-IC

Ceiling Recessed Adjustable Downlight.

How to specify

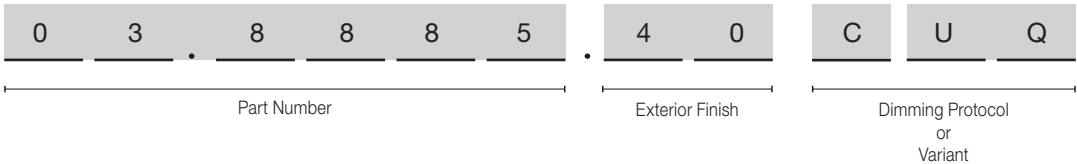

How to Specify ex. 03.8885.40CUQ

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Variant
2700	90	596	7	12°	03.8885	40 = White 14 = Black	Black	CUQ = US product. Splice Box* not included. *Has to be Always supply by FLOS
					03.8884		White	
					05.1401		Steel	
					05.1402		Bronze	
3000	90	636	7	12°	03.8889	40 = White 14 = Black	Black	
					03.8888		White	
					05.1406		Steel	
					05.1407		Bronze	
2700	90	596	7	23°	03.9301	40 = White 14 = Black	Black	
					03.9300		White	
					05.1411		Steel	
					05.1412		Bronze	
3000	90	636	7	23°	03.9311	40 = White 14 = Black	Black	
					03.9310		White	
					05.1416		Steel	
					05.1417		Bronze	


Light Shadow Adjustable, Trim 2L NON-IC

Ceiling Recessed Adjustable Downlight.

How to Specify ex. 03.9306.40CUQ

CCT	CRI	Initial Lumens	Watts	Beam Angle	Part Number	Exterior Finish	Interior Finish	Variant	
2700	90	596	7	29°	03.9306	40 = White 14 = Black	Black	CUQ = US product. Splice Box* not included. *Has to be Always supply by FLOS	
					03.9305		White		
					05.1421		Steel		
					05.1422		Bronze		
3000	90	636	7		03.9316	40 = White 14 = Black	Black		
					03.9315		White		
					05.1426		Steel		
					05.1427		Bronze		
2700	90	596	7	45°	03.7301	40 = White 14 = Black	Black		
					03.7300		White		
					05.1431		Steel		
					05.1432		Bronze		
3000	90	636	7		03.7305	40 = White 14 = Black	Black		
					03.7304		White		
					05.1436		Steel		
					05.1437		Bronze		

Photometrics

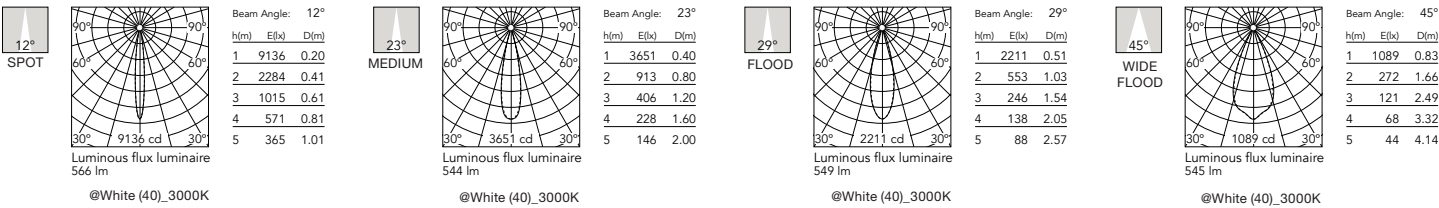

Light Shadow Adjustable, Trim 2L NON-IC

Ceiling Recessed Adjustable Downlight.

Required Accessories

Table with 3 columns: Accessory description, Part number, and Diagram.
Row 1: Splice Box 20W, 10% dim, 0-10V, 120V. Size: 9" x 2.22" x 1.25". SP20W900MA-120-C01.
Row 2: Splice Box 20W, 10% dim, 0-10V, 277V. Size: 9" x 2.22" x 1.25". SP20W900MA-277-C01.
Row 3: Splice Box 20W, 20% dim, ELV, 120V. Size: 9" x 2.22" x 1.25". SP20W900MA-ELV-C01.

Tray - Optional Accessories

Table with 2 columns: Accessory description and Diagram.
Row 1: Registration tray -non electrical, place holder for non IC new construction, 3.27" x 2.48". TRAY-0033.
Row 2: 0.06" Thick Aluminum. (This row is merged with the previous one in the original image).