

## Light Shadow Adjustable, Trim 4L NON-IC

Ceiling Recessed Adjustable Downlight.

### Description

Flos introduces Light Shadow, a revolution in low-glare lighting. A patented and unique optical solution in this new family reaches extreme cut off angles without sacrificing efficiency. The optics have been designed exclusively by FLOS and guarantee maximum control and uniformity of the beam. Light Shadow is a downlight that can be perfectly incorporated into any architecture because of its extraordinary compact size that allows the integration even when there is a minimum space. The collection is available in 2/4/8/or 12 spots, trimmed or trimless, and fixed or adjustable. It can be mounted in a continuous row. The Light Shadow 4 spot is also available as a light element for Running Magnet 2.0.

### Lamp

|                   |                                  |
|-------------------|----------------------------------|
| Lamp Type         | LED                              |
| Wattage           | 10.8W                            |
| Initial Lumens    | 1192 lm, 1272 lm                 |
| Color Temperature | 2700K, 3000K, 3500K* (See Notes) |
| Color rendering   | CRI 90                           |

### Optical

|                    |                    |
|--------------------|--------------------|
| Beam Angle         | 12°/ 23°/ 29°/ 45° |
| Lighting Type      | Direct             |
| Light Distribution | Symmetric          |

### Physical

|                           |                                                                                                      |
|---------------------------|------------------------------------------------------------------------------------------------------|
| Material                  | Aluminum                                                                                             |
| Aiming                    | Adjustable 30°  |
| Weight                    | Fixture: 0.75 Pounds                                                                                 |
| Ingress Protection Rating | IP20                                                                                                 |

#### Finishes:

Exterior:




Interior:

☐ White ☐ Black ☐ Steel ☐ Bronze



### Dimensions

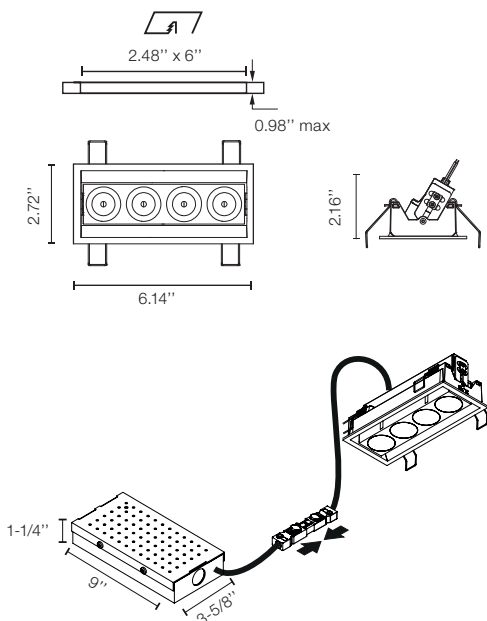

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)

### Warranty

2 years from date of sale.


|                           |                           |
|---------------------------|---------------------------|
| Installation type         | Ceiling Recessed - Non IC |
| Environment               | Indoor                    |
| Minimum Plenum height     | 6"                        |
| Maximum Ceiling thickness | 0.98"                     |

## Light Shadow Adjustable, Trim 4L NON-IC

Ceiling Recessed Adjustable Downlight.



### Dimensions

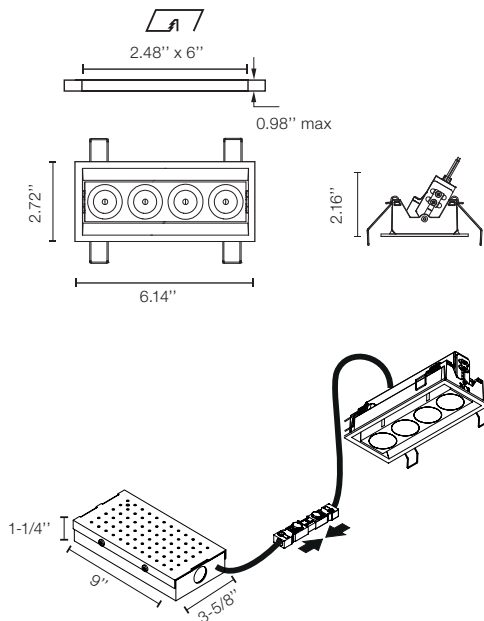

### Electrical & Control

|                      |                                                 |
|----------------------|-------------------------------------------------|
| Driver Input Voltage | 120V or 277V (depending on Selected Splice Box) |
| Control              | 0-10V and ELV                                   |
| Driver               | Integral - Splice Box                           |
| Current              | 900mA                                           |

### Performance

|                  |                               |
|------------------|-------------------------------|
| Delivered Lumens | up to 1060 lm / up to 1131 lm |
| Efficacy         | up to 104 lm/W                |

### Notes

Black reflector provides the greatest comfort level

Integral LED board is not field replaceable.

Splice Box is installed from below

Non IC rated luminaire

Splice Box required has to be ordered separately always from FLOS. 3 Standard Options:

- 0-10V Dimming 120V
- 0-10V Dimming 277V
- ELV Dimming 120V

3500K and other CCT available but not cataloged. Consult factory for additional color temperatures.

### Certifications



### Photometrics

For current IES files please visit  
[arch.flosusa.com](http://arch.flosusa.com)


### Warranty

2 years from date of sale.

Light Shadow Adjustable, Trim 4L NON-IC

Ceiling Recessed Adjustable Downlight.

How to specify

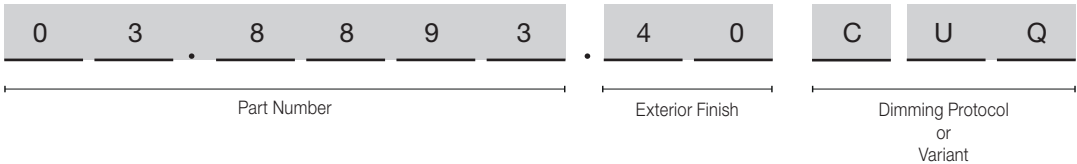

How to Specify ex. 03.8893.40CUQ

| CCT  | CRI | Initial Lumens | Watts | Beam Angle | Part Number | Exterior Finish                             | Interior Finish | Variant                                                                         |
|------|-----|----------------|-------|------------|-------------|---------------------------------------------|-----------------|---------------------------------------------------------------------------------|
| 2700 | 90  | 1192           | 10,8  | 12°        | 03.8893     | <div>40 = White</div> <div>14 = Black</div> | Black           | CUQ = US product. Splice Box* not included.<br>*Has to be Always supply by FLOS |
|      |     |                |       |            | 03.8892     |                                             | White           |                                                                                 |
|      |     |                |       |            | 05.1501     |                                             | Steel           |                                                                                 |
|      |     |                |       |            | 05.1502     |                                             | Bronze          |                                                                                 |
| 3000 | 90  | 1272           | 10,8  | 12°        | 03.8897     | <div>40 = White</div> <div>14 = Black</div> | Black           |                                                                                 |
|      |     |                |       |            | 03.8896     |                                             | White           |                                                                                 |
|      |     |                |       |            | 05.1506     |                                             | Steel           |                                                                                 |
|      |     |                |       |            | 05.1507     |                                             | Bronze          |                                                                                 |
| 2700 | 90  | 1192           | 10,8  | 23°        | 03.9321     | <div>40 = White</div> <div>14 = Black</div> | Black           |                                                                                 |
|      |     |                |       |            | 03.9320     |                                             | White           |                                                                                 |
|      |     |                |       |            | 05.1511     |                                             | Steel           |                                                                                 |
|      |     |                |       |            | 05.1512     |                                             | Bronze          |                                                                                 |
| 3000 | 90  | 1272           | 10,8  | 23°        | 03.9331     | <div>40 = White</div> <div>14 = Black</div> | Black           |                                                                                 |
|      |     |                |       |            | 03.9330     |                                             | White           |                                                                                 |
|      |     |                |       |            | 05.1516     |                                             | Steel           |                                                                                 |
|      |     |                |       |            | 05.1517     |                                             | Bronze          |                                                                                 |


Light Shadow Adjustable, Trim 4L NON-IC

Ceiling Recessed Adjustable Downlight.

How to Specify ex. 03.9326.40CUQ

| CCT  | CRI | Initial Lumens | Watts | Beam Angle | Part Number | Exterior Finish                                                     | Interior Finish               | Variant                                                                             |
|------|-----|----------------|-------|------------|-------------|---------------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------|
| 2700 | 90  | 1192           | 10,8  | 29°        | 03.9326     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> | <div><div></div> Black</div>  | CUQ = US product. Splice Box* not included.<br><br>*Has to be Always supply by FLOS |
|      |     |                |       |            | 03.9325     |                                                                     | <div><div></div> White</div>  |                                                                                     |
|      |     |                |       |            | 05.1521     |                                                                     | <div><div></div> Steel</div>  |                                                                                     |
|      |     |                |       |            | 05.1522     |                                                                     | <div><div></div> Bronze</div> |                                                                                     |
| 3000 | 90  | 1272           | 10,8  |            | 03.9336     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> | <div><div></div> Black</div>  |                                                                                     |
|      |     |                |       |            | 03.9335     |                                                                     | <div><div></div> White</div>  |                                                                                     |
|      |     |                |       |            | 05.1526     |                                                                     | <div><div></div> Steel</div>  |                                                                                     |
|      |     |                |       |            | 05.1527     |                                                                     | <div><div></div> Bronze</div> |                                                                                     |
| 2700 | 90  | 1192           | 10,8  | 45°        | 03.7309     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> | <div><div></div> Black</div>  |                                                                                     |
|      |     |                |       |            | 03.7308     |                                                                     | <div><div></div> White</div>  |                                                                                     |
|      |     |                |       |            | 05.1531     |                                                                     | <div><div></div> Steel</div>  |                                                                                     |
|      |     |                |       |            | 05.1532     |                                                                     | <div><div></div> Bronze</div> |                                                                                     |
| 3000 | 90  | 1272           | 10,8  |            | 03.7313     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> | <div><div></div> Black</div>  |                                                                                     |
|      |     |                |       |            | 03.7312     |                                                                     | <div><div></div> White</div>  |                                                                                     |
|      |     |                |       |            | 05.1536     |                                                                     | <div><div></div> Steel</div>  |                                                                                     |
|      |     |                |       |            | 05.1537     |                                                                     | <div><div></div> Bronze</div> |                                                                                     |

Photometrics

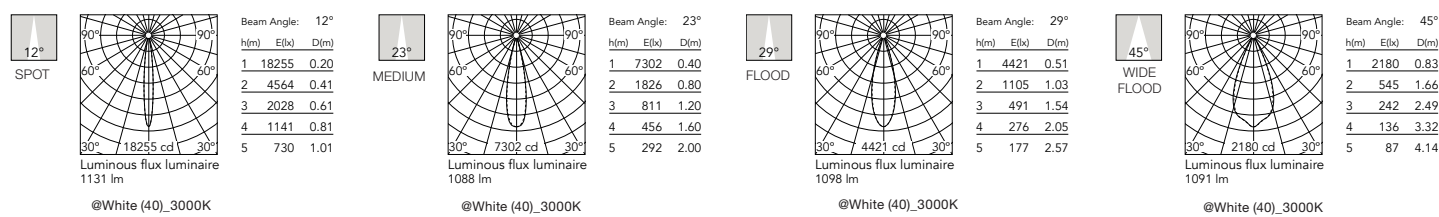

Light Shadow Adjustable, Trim 4L NON-IC

Ceiling Recessed Adjustable Downlight.

Required Accessories

Table with 3 columns: Splice Box 25W, 1% dim, 0-10V, 120V. Size: 9" x 3.59" x 1.25"; Splice Box 25W, 1% dim, 0-10V, 277V. Size: 9" x 3.59" x 1.25"; Splice Box 20W, 20% dim, ELV, 120V. Size: 9" x 2.22" x 1.25".

Tray - Optional Accessories

Registration tray -non electrical, place holder for non IC new construction, 6.04" x 2.48"

TRAY-0037

0.06" Thick Aluminum

