



The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Description

The new Tracking Magnet 48V system is creative, flexible, reliable and precise. Accent luminaires are installed by a magnetic fastening system and a secondary mechanical fastener. The range of luminaires is composed of accent illumination modules with different optics and linear luminaires with the Flos signature design. The Tracking Magnet is available in recessed, surface, or pendant mounted applications, making it an option in even the most varied of job conditions. Vertical and horizontal corners complete the system. The Tracking Magnet is perfect for retail displays where frequent changes are typical and absolute performance is required.


Lamp

System Lamp Type	LED
Color Temperature	2700K, 3000K, *3500K, *4000K (See Notes)
Color Rendering	CRI90
Application	General Lighting / Accent lighting

Physical

Material	Aluminum
Ingress Protection Rating	IP20
Finishes	<input type="checkbox"/> 40 White <input checked="" type="checkbox"/> 14 White <input type="checkbox"/> 05 Chrome
Installation type	Ceiling Surface
Environment	Indoor
Field cuttable	No

Suspended Installation

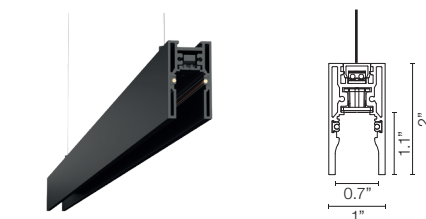

Light Modules



Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Driver Output Voltage	48V
Maximum Driver Wattage	Class 2 - 96W
Control	Standard 0-10V dimming / DALI / On board / Casambi for Light Shadow Spot and Multi Spot Mini.
N° Circuit	1 circuit



The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Notes

EC to supply site cabling from driver to track location.

Wattage per linear foot is dependent upon quantity and type of light modules used.

Spots and linear luminaires available with individually addressable DALI-Wireless circuitry, 0-10V (from 10% up to 100%) Dimming, Casambi for Light Shadow Spot and Multi Spot Mini.


0-10V Fixtures come from the factory set up at the lowest level 10% they always required a 0-10V signal to achieve the maximum output.

3500K, 4000K and other CCT available but not cataloged. Consult factory for additional color temperatures.



Suspended Installation

How To Specify

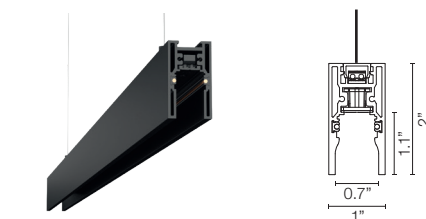

Light Modules



Certifications

Certifications



Photometrics

For current IES files please visit
arch.flosusa.com

Warranty

2 years from date of sale.

A. Select and position corners

1. Horizontal - Connect sections on flat surfaces (90° corner)
2. Inside - Transition from wall to ceiling (inside corner)
3. External - Turn outside corners for walls and soffits (270° corner)

B. Fill lengths between corners with Linear Housings


Select dimmable (DALI-FLOS Smart control and 0-10V fixtures) or non dimmable track (Built-in dimmer fixtures). Available section lengths are 3.3', 4.9', 6.7' or 8.2'.

C. Drivers

Quantity of drivers determined by total wattage or light elements in section (total maximum possible per linear foot is 29W). Maximum driver distance is 15'. Locate drivers nearby.

D. Select Spot heads


Light Strips are available in three nominal lengths: 11.8", 23.6", 35.4", 47.2" and 59". Individual Spots are Spot 50, Spot 90, Spot 120, Spot 150 and Anthony.

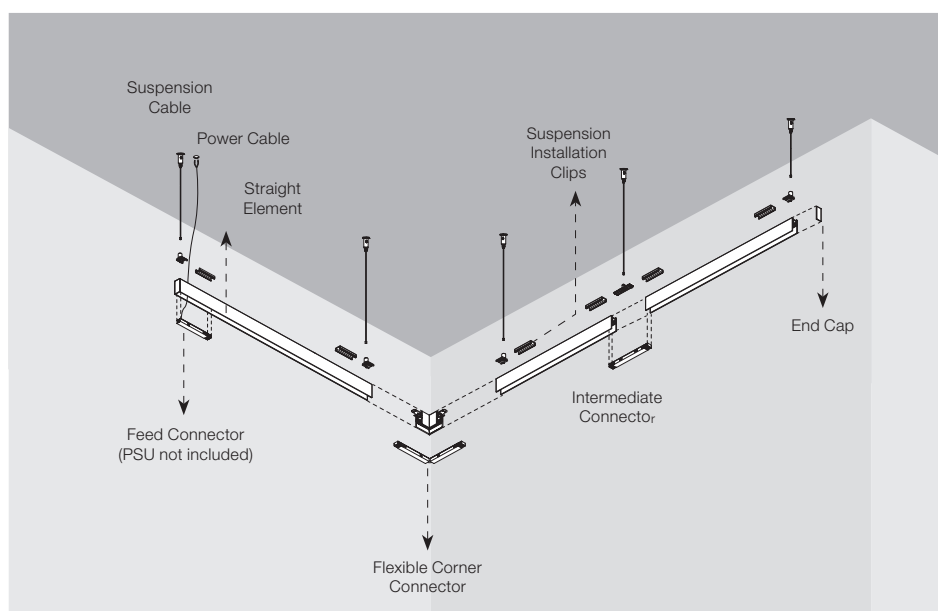

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Track

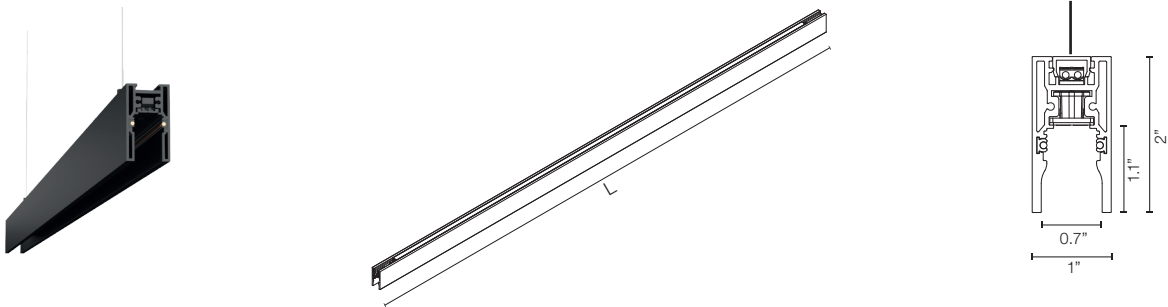

How to specify: 06.5070.14

Length	Part Number	Delivered Lumens	Finish	Dimming Protocol
39.4" (1m)	06.5070	465 lm	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	Dimmable on Board Dimmable Casambi
59" (1.5m)	06.5071	697.5 lm		
78.7" (2m)	06.5072	930 lm		
98.4" (2.5m)	06.5073	1162.5 lm		
118.11" (3m)	06.5074	1257 lm	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div>	

How to specify: 06.5070.14

Length	Part Number	Delivered Lumens	Finish	Dimming Protocol
39.4" (1m)	06.5020	465 lm	<div><input type="checkbox"/> 40 = White</div> <div><input checked="" type="checkbox"/> 14 = Black</div> <div><input type="checkbox"/> 05 = Chrome</div>	1-10V, 10% Dimming DALI, 10% Dimming Dimmable Casambi
59" (1.5m)	06.5021	697.5 lm		
78.7" (2m)	06.5022	930 lm		
98.4" (2.5m)	06.5023	1162.5 lm		
118.11" (3m)	06.5024	1257 lm	<div><input type="checkbox"/> 40 = White</div> <div><input checked="" type="checkbox"/> 14 = Black</div>	

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Corners



90° horizontal ceiling mechanical corner available. In order to create electrical continuity the flexible intermediate connector is required.

90° mechanical angle.

Two end suspension connections included.
Steel cable not included. No lighting on the upper part. Upper part connections included.

Part Number:

- 06.5025.14
- 06.5025.40
- 06.5025.05



The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Connectors

<p>Feed connector for Tracking Magnet Suspension Up&Down includes: 1 feed connector, 1 transparent feed cable 4m - 13ft. Includes beginning and end fixing ceiling kit. Suspension cable or rigid Rod not included.</p> <p>Part Number:</p> <p>08.0626.00</p>	<p>Intermediate connector for Tracking Magnet Suspension Up&Down (1 unit kit)</p> <p>Part Number:</p> <p>08.0612.14</p>	<p>Flexible/Electrical Intermediate Corner for Tracking Magnet suspension if electrical continuity on corners is required.</p> <p>Part Number:</p> <p>08.0614.14</p>

*Intermediate connectors to be ordered separately if electrical continuity on corners is required.

The Tracking Magnet EVO Suspension Up&Down


High-tech LED lighting system for interior architecture

Dimming controllers

Dimming Control Unit Box 48V
0-10V Required for a 0-10V Dimming
installation. 1 Dimming control can
control up to 20 fixtures

Part Number:



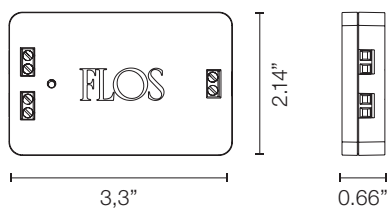




■ 08.0613.14A



The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Required Accesories




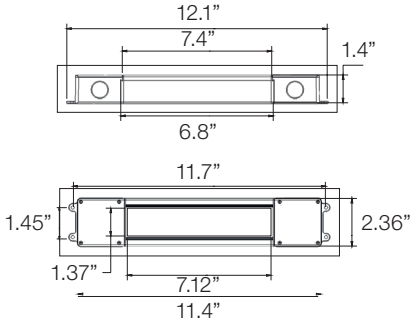
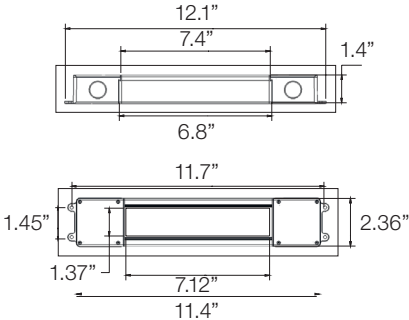
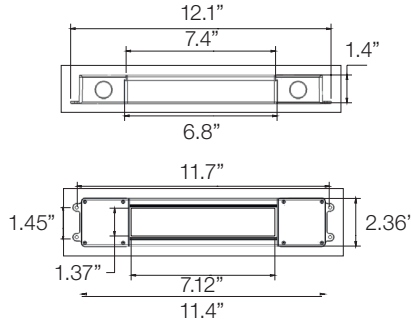
Intermediate Suspension Kit Part Number: 08.0627.00	End Cap kit (2 units) Part Number: 06.5017.14 06.5017.40 06.5017.05	Suspension steel cable, lenght 4m (13ft) Recommended where tilting will not occur in any case. Part Number: 08.8634.00
		
Suspension rod with rose, lenght 1m (3.3ft) M6 thread. Rigid rod to avoid the profile from tilting to be installed in places where a more rigid fixing system is required. Part Number: 60.3014.14 60.3014.11	Suspension rod extension, lenght 1m(3.3ft) M6 thread. Rigid rod to avoid the profile from tilting to be installed in places where a more rigid fixing system is required. Part Number: 60.3097.14 60.3097.11	Cover Plate 5" Junction Box Cover Plate for Remote Installation. Part Number: 08.8883.40A 08.8883.14A
		 

Profile	Minimum qty fixing points depending on track length
39.37" / 59.06" [1000 mm/ 1500 mm]	2
78.74" / 98.42" [2000 mm/ 2500 mm]	3

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Required Drivers

<p>LED power supply source for remote installation, 48V/96W, 120-277V, UL Listed</p> <p>Part Number:</p> <p>LEDSB96W48V-NDM-D01</p>	<p>LED power supply source for remote installation, 48V/60W, 120-277V, UL Listed</p> <p>Part Number:</p> <p>LEDSB60W48V-NDM-D01</p>	<p>LED power supply source for remote installation, 48V/30W, 120-277V, UL Listed</p> <p>Part Number:</p> <p>LEDSB30W48V-NDM-D01</p>
		
		

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture


Surface mounted canopies

Surface mount canopy Non Dimmable for Tracking Magnet SuspensionUp&Down includes: 1 drivers downlight: 96W, 48V, 120-277V	Surface mount canopy Dimmable for Tracking Magnet Suspension Down includes: 1 driver downlight: 96W, 48V, 120-277V 1 Dimming Control Unit Box: 08.0613.14A	Surface mount canopy Dimmable for Tracking Magnet Suspension Down includes: 1 driver downlight: 60W, 48V, 120-277V 1 Dimming Control Unit Box: 08.0613.14A
Part Number: 08U4806.14 08U4806.40	Part Number: 08U4806.14.1V 08U4806.40.1V	Part Number: 08U4807.40.1V 08U4807.14.1V


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

How to specify

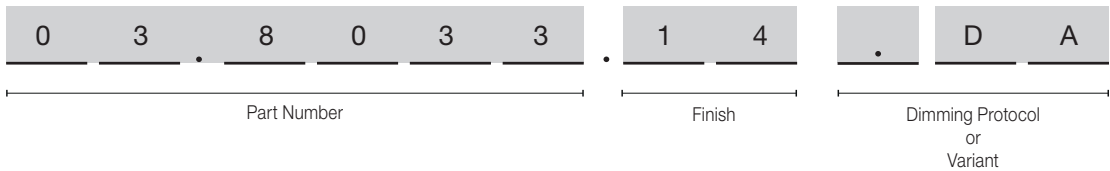

Spot 50

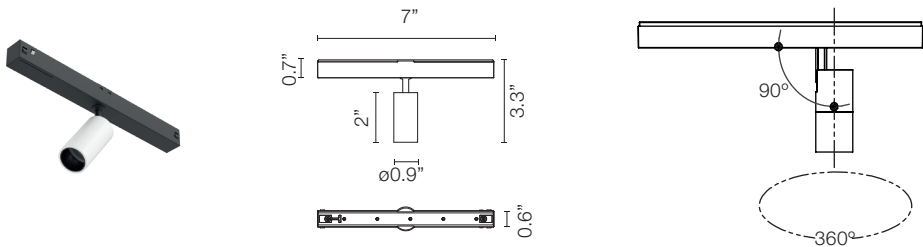

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric												
3000	90	307	212	3.5	26°	03.8033	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	A Dimmable on Board A1V = 0-10V, 10% Dimming ADA = DALI, 10% Dimming	<div><p>90° 90° 60° 60° 30° 30° 1012 cd Luminous flux luminaire 212 lm</p></div> <div><table><tr><th>E(k)</th><th>D(m)</th></tr><tr><td>1</td><td>1012 0.47</td></tr><tr><td>2</td><td>253 0.94</td></tr><tr><td>3</td><td>112 1.41</td></tr><tr><td>4</td><td>63 1.88</td></tr><tr><td>5</td><td>40 2.35</td></tr></table></div>	E(k)	D(m)	1	1012 0.47	2	253 0.94	3	112 1.41	4	63 1.88	5	40 2.35
E(k)	D(m)																				
1	1012 0.47																				
2	253 0.94																				
3	112 1.41																				
4	63 1.88																				
5	40 2.35																				
2700	90	286	205	3.5	26°	03.8032			<div><p>90° 90° 60° 60° 30° 30° 977 cd Luminous flux luminaire 205 lm</p></div> <div><table><tr><th>E(k)</th><th>D(m)</th></tr><tr><td>1</td><td>977 0.47</td></tr><tr><td>2</td><td>244 0.94</td></tr><tr><td>3</td><td>109 1.41</td></tr><tr><td>4</td><td>61 1.88</td></tr><tr><td>5</td><td>39 2.35</td></tr></table></div>	E(k)	D(m)	1	977 0.47	2	244 0.94	3	109 1.41	4	61 1.88	5	39 2.35
E(k)	D(m)																				
1	977 0.47																				
2	244 0.94																				
3	109 1.41																				
4	61 1.88																				
5	39 2.35																				


Included Accessories Spot 50

Cross Baffle	Honeycomb

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 90

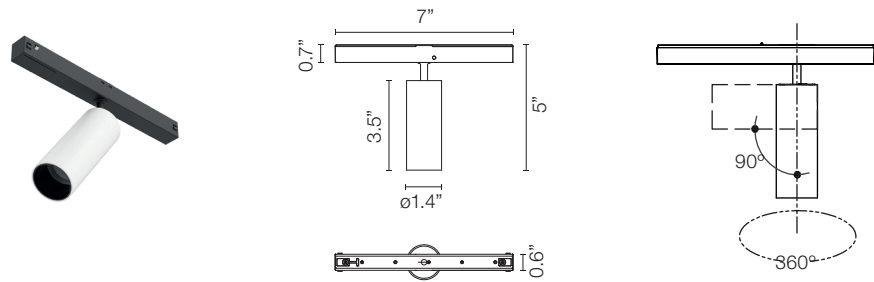

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
3000	90	656	443	8.5	14°	03.8043	<div>40 = White</div> <div>14 = Black</div> <div>05 = Chrome</div>	<div>A Dimmable on Board</div> <div>A1V = 0-10V, 10% Dimming</div> <div>ADA = DALI, 10% Dimming</div>	<div></div> <div>E(lx) D(m)</div> <div>h(m) 14°</div> <div>1 5805 0.25</div> <div>2 1451 0.49</div> <div>3 645 0.74</div> <div>4 363 0.98</div> <div>5 232 1.23</div> <div>5805 cd</div> <div>Luminous flux luminaire 443 lm</div>
2700	90	610	428	8.5	14°	03.8042			<div></div> <div>E(lx) D(m)</div> <div>h(m) 14°</div> <div>1 5601 0.25</div> <div>2 1400 0.49</div> <div>3 622 0.74</div> <div>4 350 0.98</div> <div>5 224 1.23</div> <div>5601 cd</div> <div>Luminous flux luminaire 428 lm</div>
3000	90	656	406	8.5	22°	03.8045			<div></div> <div>E(lx) D(m)</div> <div>h(m) 22°</div> <div>1 2403 0.38</div> <div>2 601 0.77</div> <div>3 267 1.15</div> <div>4 150 1.54</div> <div>5 96 1.92</div> <div>2403 cd</div> <div>Luminous flux luminaire 406 lm</div>
2700	90	610	392	8.5	22°	03.8044			<div></div> <div>E(lx) D(m)</div> <div>h(m) 22°</div> <div>1 2319 0.38</div> <div>2 580 0.77</div> <div>3 258 1.15</div> <div>4 145 1.54</div> <div>5 93 1.92</div> <div>2319 cd</div> <div>Luminous flux luminaire 392 lm</div>

Included Accessories Spot 90

Cross Baffle




Honeycomb




The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 120 Power LED

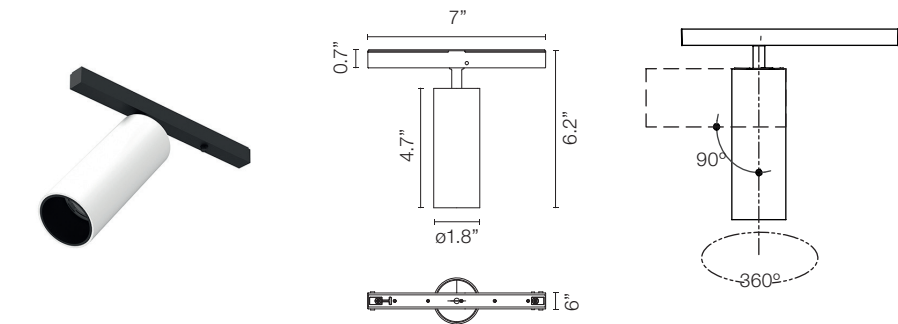

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric												
3000	90	779	558	12	11°	03.8053	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	A Dimmable on Board A1V = 0-10V, 10% Dimming ADA = DALI, 10% Dimming	<div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>4780 0.31</td></tr><tr><td>2</td><td>1195 0.61</td></tr><tr><td>3</td><td>531 0.92</td></tr><tr><td>4</td><td>299 1.23</td></tr><tr><td>5</td><td>191 1.53</td></tr></tbody></table><div>Luminous flux luminaire 4780 lm</div></div>	E(lx)	D(m)	1	4780 0.31	2	1195 0.61	3	531 0.92	4	299 1.23	5	191 1.53
E(lx)	D(m)																				
1	4780 0.31																				
2	1195 0.61																				
3	531 0.92																				
4	299 1.23																				
5	191 1.53																				
2700	90	724	539	12	11°	03.8052	<div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>4547 0.31</td></tr><tr><td>2</td><td>1137 0.61</td></tr><tr><td>3</td><td>505 0.92</td></tr><tr><td>4</td><td>284 1.23</td></tr><tr><td>5</td><td>182 1.53</td></tr></tbody></table><div>Luminous flux luminaire 4547 lm</div></div>	E(lx)	D(m)	1	4547 0.31	2	1137 0.61	3	505 0.92	4	284 1.23	5	182 1.53		
E(lx)	D(m)																				
1	4547 0.31																				
2	1137 0.61																				
3	505 0.92																				
4	284 1.23																				
5	182 1.53																				
3000	90	779	505	12	17°	03.8055	<div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1437 0.73</td></tr><tr><td>2</td><td>359 1.45</td></tr><tr><td>3</td><td>160 2.18</td></tr><tr><td>4</td><td>90 2.91</td></tr><tr><td>5</td><td>57 3.64</td></tr></tbody></table><div>Luminous flux luminaire 1437 lm</div></div>	E(lx)	D(m)	1	1437 0.73	2	359 1.45	3	160 2.18	4	90 2.91	5	57 3.64		
E(lx)	D(m)																				
1	1437 0.73																				
2	359 1.45																				
3	160 2.18																				
4	90 2.91																				
5	57 3.64																				
2700	90	724	487	12	17°	03.8054	<div><table><thead><tr><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>1367 0.73</td></tr><tr><td>2</td><td>342 1.45</td></tr><tr><td>3</td><td>152 2.18</td></tr><tr><td>4</td><td>85 2.91</td></tr><tr><td>5</td><td>55 3.64</td></tr></tbody></table><div>Luminous flux luminaire 1367 lm</div></div>	E(lx)	D(m)	1	1367 0.73	2	342 1.45	3	152 2.18	4	85 2.91	5	55 3.64		
E(lx)	D(m)																				
1	1367 0.73																				
2	342 1.45																				
3	152 2.18																				
4	85 2.91																				
5	55 3.64																				

Included Accessories Spot 90

Cross Baffle




Honeycomb






The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 120 LED ARRAY

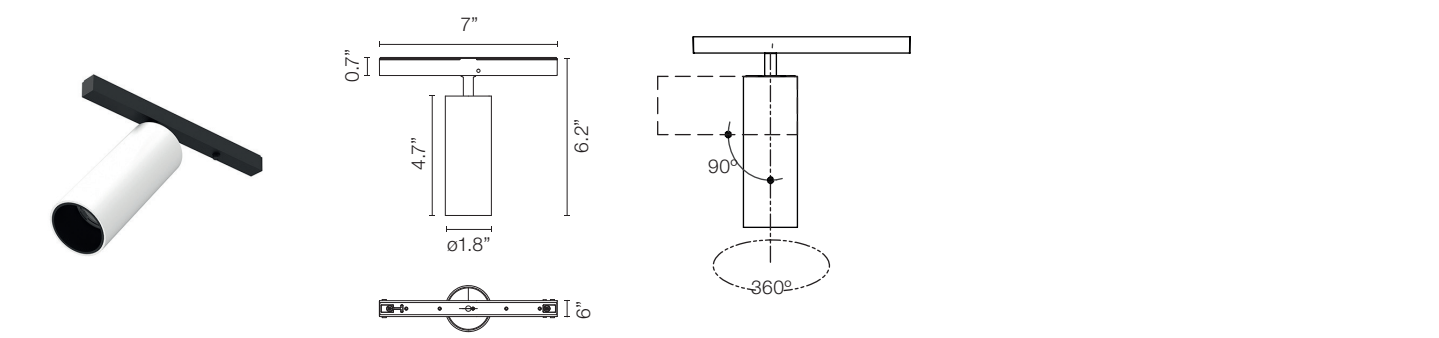

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric														
3000	90	1138	687	12.5	17°	03.8155	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	<div>Dimmable on Board</div> <div>1V = 0-10V, 10% Dimming</div> <div>DA = DALI, 10% Dimming</div>	<div><table><tr><th>E(lx)</th><th>D(m)</th></tr><tr><td>h(m)</td><td>17°</td></tr><tr><td>1</td><td>4780 0.31</td></tr><tr><td>2</td><td>1195 0.61</td></tr><tr><td>3</td><td>531 0.92</td></tr><tr><td>4</td><td>299 1.23</td></tr><tr><td>5</td><td>191 1.53</td></tr></table><div>Luminous flux luminaire 687 lm</div></div>	E(lx)	D(m)	h(m)	17°	1	4780 0.31	2	1195 0.61	3	531 0.92	4	299 1.23	5	191 1.53
E(lx)	D(m)																						
h(m)	17°																						
1	4780 0.31																						
2	1195 0.61																						
3	531 0.92																						
4	299 1.23																						
5	191 1.53																						
2700	90	1075	654	12.5	17°	03.8154	<div><table><tr><th>E(lx)</th><th>D(m)</th></tr><tr><td>h(m)</td><td>17°</td></tr><tr><td>1</td><td>4547 0.31</td></tr><tr><td>2</td><td>1137 0.61</td></tr><tr><td>3</td><td>505 0.92</td></tr><tr><td>4</td><td>284 1.23</td></tr><tr><td>5</td><td>182 1.53</td></tr></table><div>Luminous flux luminaire 654 lm</div></div>	E(lx)	D(m)	h(m)	17°	1	4547 0.31	2	1137 0.61	3	505 0.92	4	284 1.23	5	182 1.53		
E(lx)	D(m)																						
h(m)	17°																						
1	4547 0.31																						
2	1137 0.61																						
3	505 0.92																						
4	284 1.23																						
5	182 1.53																						
3000	90	1138	629	12.5	40°	03.8157	<div><table><tr><th>E(lx)</th><th>D(m)</th></tr><tr><td>h(m)</td><td>40°</td></tr><tr><td>1</td><td>1437 0.73</td></tr><tr><td>2</td><td>359 1.45</td></tr><tr><td>3</td><td>160 2.18</td></tr><tr><td>4</td><td>90 2.91</td></tr><tr><td>5</td><td>57 3.64</td></tr></table><div>Luminous flux luminaire 629 lm</div></div>	E(lx)	D(m)	h(m)	40°	1	1437 0.73	2	359 1.45	3	160 2.18	4	90 2.91	5	57 3.64		
E(lx)	D(m)																						
h(m)	40°																						
1	1437 0.73																						
2	359 1.45																						
3	160 2.18																						
4	90 2.91																						
5	57 3.64																						
2700	90	1075	599	12.5	40°	03.8156	<div><table><tr><th>E(lx)</th><th>D(m)</th></tr><tr><td>h(m)</td><td>40°</td></tr><tr><td>1</td><td>1367 0.73</td></tr><tr><td>2</td><td>342 1.45</td></tr><tr><td>3</td><td>152 2.18</td></tr><tr><td>4</td><td>85 2.91</td></tr><tr><td>5</td><td>55 3.64</td></tr></table><div>Luminous flux luminaire 599 lm</div></div>	E(lx)	D(m)	h(m)	40°	1	1367 0.73	2	342 1.45	3	152 2.18	4	85 2.91	5	55 3.64		
E(lx)	D(m)																						
h(m)	40°																						
1	1367 0.73																						
2	342 1.45																						
3	152 2.18																						
4	85 2.91																						
5	55 3.64																						


Included Accessories Spot 90







Cross Baffle	Honeycomb
	

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Spot 150

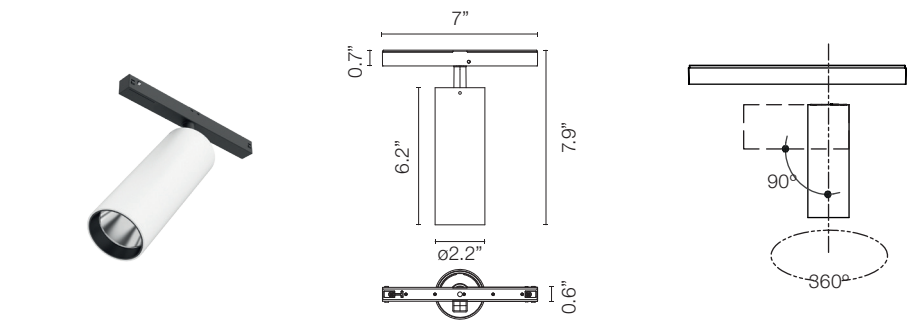






CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																								
3000	90	2115	1872	22.5	16°	03.8073	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	Dimmable on Board	<div><table><tr><th>h(m)</th><th>16°</th></tr><tr><td>1</td><td>17329 0.28</td></tr><tr><td>2</td><td>4332 0.56</td></tr><tr><td>3</td><td>1925 0.84</td></tr><tr><td>4</td><td>1083 1.12</td></tr><tr><td>5</td><td>593 1.40</td></tr></table>Luminous flux luminaire 1872 lm</div>	h(m)	16°	1	17329 0.28	2	4332 0.56	3	1925 0.84	4	1083 1.12	5	593 1.40												
h(m)	16°																																
1	17329 0.28																																
2	4332 0.56																																
3	1925 0.84																																
4	1083 1.12																																
5	593 1.40																																
2700	90	2000	1770	22.5	16°	03.8072	A1V = 0-10V, 10% Dimming ADA = DALI, 10% Dimming	<div><table><tr><th>h(m)</th><th>16°</th></tr><tr><td>1</td><td>16385 0.28</td></tr><tr><td>2</td><td>4096 0.56</td></tr><tr><td>3</td><td>1821 0.84</td></tr><tr><td>4</td><td>1024 1.12</td></tr><tr><td>5</td><td>555 1.40</td></tr></table>Luminous flux luminaire 1770 lm</div>	h(m)	16°	1	16385 0.28	2	4096 0.56	3	1821 0.84	4	1024 1.12	5	555 1.40													
h(m)	16°																																
1	16385 0.28																																
2	4096 0.56																																
3	1821 0.84																																
4	1024 1.12																																
5	555 1.40																																
3000	90	2115	1816	22.5	28°	03.8075	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	Dimmable on Board	<div><table><tr><th>h(m)</th><th>28°</th></tr><tr><td>1</td><td>8395 0.50</td></tr><tr><td>2</td><td>2099 1.00</td></tr><tr><td>3</td><td>933 1.50</td></tr><tr><td>4</td><td>525 2.00</td></tr><tr><td>5</td><td>336 2.50</td></tr></table>Luminous flux luminaire 1816 lm</div>	h(m)	28°	1	8395 0.50	2	2099 1.00	3	933 1.50	4	525 2.00	5	336 2.50												
h(m)	28°																																
1	8395 0.50																																
2	2099 1.00																																
3	933 1.50																																
4	525 2.00																																
5	336 2.50																																
2700	90	2000	1717	22.5	28°	03.8074	A1V = 0-10V, 10% Dimming ADA = DALI, 10% Dimming	<div><table><tr><th>h(m)</th><th>28°</th></tr><tr><td>1</td><td>7938 0.50</td></tr><tr><td>2</td><td>1984 1.00</td></tr><tr><td>3</td><td>882 1.50</td></tr><tr><td>4</td><td>496 2.00</td></tr><tr><td>5</td><td>318 2.50</td></tr></table>Luminous flux luminaire 1717 lm</div>	h(m)	28°	1	7938 0.50	2	1984 1.00	3	882 1.50	4	496 2.00	5	318 2.50													
h(m)	28°																																
1	7938 0.50																																
2	1984 1.00																																
3	882 1.50																																
4	496 2.00																																
5	318 2.50																																
3000	90	2115	1838	22.5	40°	03.8077	<div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div>	Dimmable on Board	<div><table><tr><th>E(lx)</th><th>D(m)</th><th>h(m)</th><th>40°</th></tr><tr><td>1</td><td>4656</td><td>0.73</td><td></td></tr><tr><td>2</td><td>1164</td><td>1.46</td><td></td></tr><tr><td>3</td><td>517</td><td>2.18</td><td></td></tr><tr><td>4</td><td>291</td><td>2.91</td><td></td></tr><tr><td>5</td><td>186</td><td>3.64</td><td></td></tr></table>Luminous flux luminaire 1838 lm</div>	E(lx)	D(m)	h(m)	40°	1	4656	0.73		2	1164	1.46		3	517	2.18		4	291	2.91		5	186	3.64	
E(lx)	D(m)	h(m)	40°																														
1	4656	0.73																															
2	1164	1.46																															
3	517	2.18																															
4	291	2.91																															
5	186	3.64																															
2700	90	2000	1738	22.5	40°	03.8076	A1V = 0-10V, 10% Dimming ADA = DALI, 10% Dimming	<div><table><tr><th>E(lx)</th><th>D(m)</th><th>h(m)</th><th>40°</th></tr><tr><td>1</td><td>4402</td><td>0.73</td><td></td></tr><tr><td>2</td><td>1101</td><td>1.46</td><td></td></tr><tr><td>3</td><td>489</td><td>2.18</td><td></td></tr><tr><td>4</td><td>275</td><td>2.91</td><td></td></tr><tr><td>5</td><td>176</td><td>3.64</td><td></td></tr></table>Luminous flux luminaire 1738 lm</div>	E(lx)	D(m)	h(m)	40°	1	4402	0.73		2	1101	1.46		3	489	2.18		4	275	2.91		5	176	3.64		
E(lx)	D(m)	h(m)	40°																														
1	4402	0.73																															
2	1101	1.46																															
3	489	2.18																															
4	275	2.91																															
5	176	3.64																															

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture


Optional Accessories Spot 150

Cross Baffle	Elliptical Lens	Flood Lens
Part Number: 08.8429.00	Part Number: 08.8431.00	Part Number: 08.8432.00
		
Honeycomb	Snoot shielding cone	
Part Number: 08.8428.00	Part Number: 08.0526.00	
		

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Light Shadow Spot 30

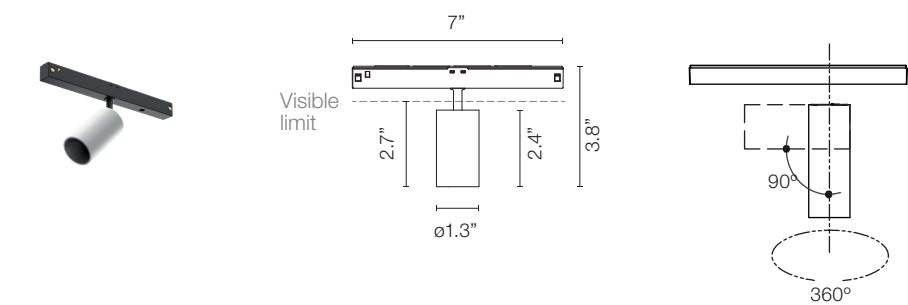


CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
3000	90	263	214	4.5	10°	05.9005	<div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	257	209	4.5	10°	05.9000		
3000	90	263	205	4.5	22°	05.9006	<div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	257	201	4.5	22°	05.9001		
3000	90	263	204	4.5	33°	05.9007	<div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	257	200	4.5	33°	05.9002		
3000	90	263	214	4.5	46°	05.9008	<div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	257	209	4.5	46°	05.9003		

The Tracking Magnet EVO Suspension Up&Down


High-tech LED lighting system for interior architecture

Photometric Light Shadow Spot 30


Spot 10° 2700K




3000K




Medium 22° 2700K




3000K




Flood 33° 2700K




3000K



Wide Flood 46° 2700K



3000K



Optional Accessories Light Shadow Spot 30

Honeycomb

Part Number:

08.0790.00



Dicroic CCT Filter

INCREASE

2700K >> 3125±75K
3000K >> 3600±75K

Part Number:

08.0791.00



Dicroic CCT Filter

DECREASE

2700K >> 2450±75K
3000K >> 2700±75K

Part Number:




08.0792.00







The Tracking Magnet EVO Suspension Up&Down



High-tech LED lighting system for interior architecture

Light Shadow Spot 45
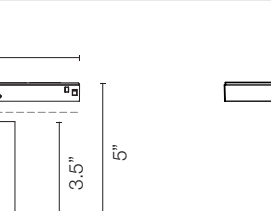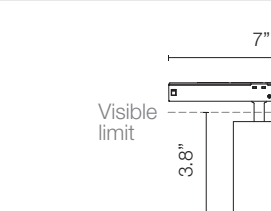
<div></div>								
CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
3000	90	844	686	10.5	15°	05.9035	<div><div></div>40 = White</div> <div><div></div>14 = Black</div> <div><div></div>ER = Brushed Steel</div> <div><div></div>ES = Brushed Bronze</div> <div><div></div>EQ = Brushed Copper</div>	Dimmable on Board
2700	90	799	650	10.5	15°	05.9030		1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
3000	90	844	682	10.5	21°	05.9036	<div><div></div>40 = White</div> <div><div></div>14 = Black</div> <div><div></div>ER = Brushed Steel</div> <div><div></div>ES = Brushed Bronze</div> <div><div></div>EQ = Brushed Copper</div>	Dimmable on Board
2700	90	799	645	10.5	21°	05.9031		1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
3000	90	844	682	10.5	31°	05.9037	<div><div></div>40 = White</div> <div><div></div>14 = Black</div> <div><div></div>ER = Brushed Steel</div> <div><div></div>ES = Brushed Bronze</div> <div><div></div>EQ = Brushed Copper</div>	Dimmable on Board
2700	90	799	646	10.5	31°	05.9032		1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming

Photometric Light Shadow Spot 45

<div>Spot 15° 2700K</div> <div>  <table> <tr><td>Beam Angle:</td><td>15°</td></tr> <tr><td>h(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>8012</td><td>0.27</td></tr> <tr><td>2</td><td>2003</td><td>0.54</td></tr> <tr><td>3</td><td>890</td><td>0.80</td></tr> <tr><td>4</td><td>501</td><td>1.07</td></tr> <tr><td>5</td><td>320</td><td>1.34</td></tr> </table> <div>Luminous flux luminaire 650 lm</div> </div> <div> <div>3000K</div> <div>  <table> <tr><td>Beam Angle:</td><td>15°</td></tr> <tr><td>h(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>8456</td><td>0.27</td></tr> <tr><td>2</td><td>2114</td><td>0.54</td></tr> <tr><td>3</td><td>940</td><td>0.80</td></tr> <tr><td>4</td><td>528</td><td>1.07</td></tr> <tr><td>5</td><td>338</td><td>1.34</td></tr> </table> <div>Luminous flux luminaire 686 lm</div> </div> </div>	Beam Angle:	15°	h(m)	E(lx)	D(m)	1	8012	0.27	2	2003	0.54	3	890	0.80	4	501	1.07	5	320	1.34	Beam Angle:	15°	h(m)	E(lx)	D(m)	1	8456	0.27	2	2114	0.54	3	940	0.80	4	528	1.07	5	338	1.34	<div>Medium 21° 2700K</div> <div>  <table> <tr><td>Beam Angle:</td><td>21°</td></tr> <tr><td>h(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>5163</td><td>0.36</td></tr> <tr><td>2</td><td>1291</td><td>0.73</td></tr> <tr><td>3</td><td>574</td><td>1.09</td></tr> <tr><td>4</td><td>323</td><td>1.46</td></tr> <tr><td>5</td><td>207</td><td>1.82</td></tr> </table> <div>Luminous flux luminaire 645 lm</div> </div> <div> <div>3000K</div> <div>  <table> <tr><td>Beam Angle:</td><td>21°</td></tr> <tr><td>h(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>5459</td><td>0.36</td></tr> <tr><td>2</td><td>1365</td><td>0.73</td></tr> <tr><td>3</td><td>607</td><td>1.09</td></tr> <tr><td>4</td><td>341</td><td>1.46</td></tr> <tr><td>5</td><td>218</td><td>1.82</td></tr> </table> <div>Luminous flux luminaire 682 lm</div> </div> </div>	Beam Angle:	21°	h(m)	E(lx)	D(m)	1	5163	0.36	2	1291	0.73	3	574	1.09	4	323	1.46	5	207	1.82	Beam Angle:	21°	h(m)	E(lx)	D(m)	1	5459	0.36	2	1365	0.73	3	607	1.09	4	341	1.46	5	218	1.82
Beam Angle:	15°																																																																																
h(m)	E(lx)	D(m)																																																																															
1	8012	0.27																																																																															
2	2003	0.54																																																																															
3	890	0.80																																																																															
4	501	1.07																																																																															
5	320	1.34																																																																															
Beam Angle:	15°																																																																																
h(m)	E(lx)	D(m)																																																																															
1	8456	0.27																																																																															
2	2114	0.54																																																																															
3	940	0.80																																																																															
4	528	1.07																																																																															
5	338	1.34																																																																															
Beam Angle:	21°																																																																																
h(m)	E(lx)	D(m)																																																																															
1	5163	0.36																																																																															
2	1291	0.73																																																																															
3	574	1.09																																																																															
4	323	1.46																																																																															
5	207	1.82																																																																															
Beam Angle:	21°																																																																																
h(m)	E(lx)	D(m)																																																																															
1	5459	0.36																																																																															
2	1365	0.73																																																																															
3	607	1.09																																																																															
4	341	1.46																																																																															
5	218	1.82																																																																															

<div>Flood 31° 2700K</div> <div>  <table> <tr><td>Beam Angle:</td><td>31°</td></tr> <tr><td>h(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>2296</td><td>0.56</td></tr> <tr><td>2</td><td>574</td><td>1.11</td></tr> <tr><td>3</td><td>255</td><td>1.67</td></tr> <tr><td>4</td><td>144</td><td>2.22</td></tr> <tr><td>5</td><td>92</td><td>2.78</td></tr> </table> <div>Luminous flux luminaire 646 lm</div> </div> <div> <div>3000K</div> <div>  <table> <tr><td>Beam Angle:</td><td>31°</td></tr> <tr><td>h(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>2424</td><td>0.56</td></tr> <tr><td>2</td><td>606</td><td>1.11</td></tr> <tr><td>3</td><td>269</td><td>1.67</td></tr> <tr><td>4</td><td>152</td><td>2.22</td></tr> <tr><td>5</td><td>97</td><td>2.78</td></tr> </table> <div>Luminous flux luminaire 682 lm</div> </div> </div>	Beam Angle:	31°	h(m)	E(lx)	D(m)	1	2296	0.56	2	574	1.11	3	255	1.67	4	144	2.22	5	92	2.78	Beam Angle:	31°	h(m)	E(lx)	D(m)	1	2424	0.56	2	606	1.11	3	269	1.67	4	152	2.22	5	97	2.78	
Beam Angle:	31°																																								
h(m)	E(lx)	D(m)																																							
1	2296	0.56																																							
2	574	1.11																																							
3	255	1.67																																							
4	144	2.22																																							
5	92	2.78																																							
Beam Angle:	31°																																								
h(m)	E(lx)	D(m)																																							
1	2424	0.56																																							
2	606	1.11																																							
3	269	1.67																																							
4	152	2.22																																							
5	97	2.78																																							

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

For more information contact your representative or go to architectural.flosusa.com
©2025 Specifications and dimensions subject to change without notice. Issued 09.29.2025

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture


Optional Accessories Light Shadow Spot 45

Honeycomb	Dicroic CCT Filter INCREASE 2700K >> 3125±75K 3000K >> 3600±75K	Dicroic CCT Filter DECREASE 2700K >> 2450±75K 3000K >> 2700±75K
Part Number: 08.0793.00	Part Number: 08.0794.00	Part Number: 08.0795.00
		

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Light Shadow Spot 60

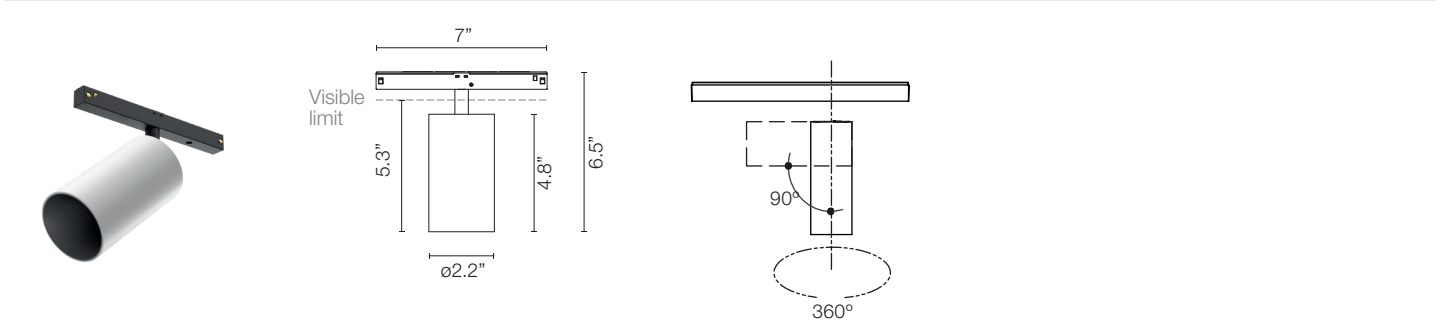

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol
3000	90	844	808	10	9°	05.9065	<div> <div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div> </div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	799	765	10	9°	05.9060		
3000	90	1751	1375	20	15°	05.9066	<div> <div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div> </div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	1593	1251	20	15°	05.9061		
3000	90	1751	1427	20	26°	05.9067	<div> <div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div> </div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	1593	1298	20	26°	05.9062		
3000	90	1751	1431	20	33°	05.9068	<div> <div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div> </div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	1593	1304	20	33°	05.9063		
3000	90	1751	1390	20	43°	05.9069	<div> <div>40 = White</div> <div>14 = Black</div> <div>ER = Brushed Steel</div> <div>ES = Brushed Bronze</div> <div>EQ = Brushed Copper</div> </div>	Dimmable on Board 1V = 0-10V, 10% Dimming CB = Dimmable Casambi DA = DALI, 10% Dimming
2700	90	1593	1268	20	43°	05.9064		


The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Photometric Light Shadow Spot 60

Super Spot 9°


2700K



Beam Angle: 9°

h(m)	E(lx)	D(m)
1	24922	0.16
2	6230	0.32
3	2769	0.48
4	1558	0.64
5	997	0.80

3000K




Beam Angle: 9°

h(m)	E(lx)	D(m)
1	26322	0.16
2	6581	0.32
3	2925	0.48
4	1645	0.64
5	1053	0.80

Spot 15°


2700K



Beam Angle: 15°

h(m)	E(lx)	D(m)
1	14350	0.27
2	3587	0.54
3	1594	0.81
4	897	1.09
5	574	1.36

3000K




Beam Angle: 15°

h(m)	E(lx)	D(m)
1	15772	0.27
2	3943	0.54
3	1752	0.81
4	986	1.09
5	631	1.36

Medium 26°


2700K



Beam Angle: 26°

h(m)	E(lx)	D(m)
1	7377	0.45
2	1844	0.91
3	820	1.36
4	461	1.82
5	295	2.27

3000K




Beam Angle: 26°

h(m)	E(lx)	D(m)
1	8110	0.45
2	2027	0.91
3	901	1.36
4	507	1.82
5	324	2.27

Flood 33°


2700K



Beam Angle: 33°

h(m)	E(lx)	D(m)
1	4472	0.60
2	1118	1.20
3	497	1.80
4	279	2.40
5	179	3.00

3000K




Beam Angle: 33°

h(m)	E(lx)	D(m)
1	4907	0.60
2	1227	1.20
3	545	1.80
4	307	2.40
5	196	3.00

Wide Flood 43°


2700K



Beam Angle: 43°

h(m)	E(lx)	D(m)
1	2761	0.79
2	690	1.59
3	307	2.38
4	173	3.17
5	110	3.97

3000K









Beam Angle: 43°

h(m)	E(lx)	D(m)
1	3026	0.79
2	757	1.59
3	336	2.38
4	189	3.17
5	121	3.97

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Optional Accessories Light Shadow Spot 60

Honeycomb Super Spot		Honeycomb Spot / Medium / Flood / Wide Flood	
Part Number:		Part Number:	
08.0175.14		08.0176.14	
			
INCREASE		INCREASE	
Dicroic Super Spot	2700K >> 3125±75K 3000K >> 3600±75K	Dicroic Spot / Medium / Flood / Wide Flood	2700K >> 3125±75K 3000K >> 3600±75K
Part Number:		Part Number:	
08.0796.00		08.0798.00	
			
DECREASE		DECREASE	
Dicroic Super Spot	2700K >> 2450±75K 3000K >> 2700±75K	Dicroic Spot / Medium / Flood / Wide Flood	2700K >> 2450±75K 3000K >> 2700±75K
Part Number:		Part Number:	
08.0797.00		08.0799.00	
			

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Light Strip

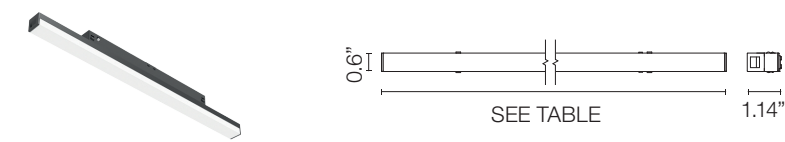



Table with 9 columns: Length, CRI, CCT, Initial Lumens, Delivered Lumens, Watts, Part Number, Finish, Dimming Protocol. It lists five different lengths of the light strip (11.8", 23.6", 35.4", 47.2", and 59") with their respective specifications.





Table with 9 columns: Length, CRI, CCT, Initial Lumens, Delivered Lumens, Watts, Part Number, Finish, Dimming Protocol. It lists five different lengths of the light strip (11.8", 23.6", 35.4", 47.2", and 59") with their respective specifications.

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Anthony Spot Track

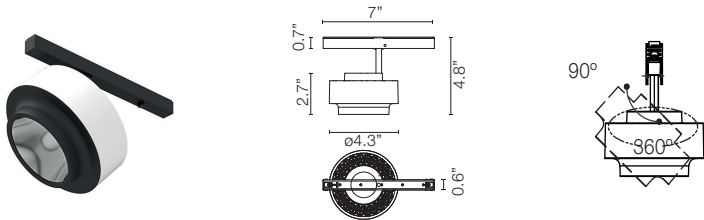

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																		
3000	90	1730	1425	17.6	15°	03.8027	<div><div>40 = White</div><div>14 = Black</div><div>05 = Chrome</div></div>	<div>Dimmable on Board</div> <div>A1V = 0-10V, 10% Dimming</div> <div>ADA = DALI, 10% Dimming</div>	<div><div>Beam Angle: 15°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>14285</td><td>0.27</td></tr><tr><td>2</td><td>3571</td><td>0.54</td></tr><tr><td>3</td><td>1587</td><td>0.81</td></tr><tr><td>4</td><td>893</td><td>1.07</td></tr><tr><td>5</td><td>571</td><td>1.34</td></tr></tbody></table><div>Luminous flux luminaire 1425 lm</div></div>	h(m)	E(lx)	D(m)	1	14285	0.27	2	3571	0.54	3	1587	0.81	4	893	1.07	5	571	1.34
h(m)	E(lx)	D(m)																									
1	14285	0.27																									
2	3571	0.54																									
3	1587	0.81																									
4	893	1.07																									
5	571	1.34																									
2700	90	1620	1241	17.6	15°	03.8025	<div><div>Beam Angle: 15°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>12442</td><td>0.27</td></tr><tr><td>2</td><td>3110</td><td>0.54</td></tr><tr><td>3</td><td>1382</td><td>0.81</td></tr><tr><td>4</td><td>778</td><td>1.07</td></tr><tr><td>5</td><td>498</td><td>1.34</td></tr></tbody></table><div>Luminous flux luminaire 1241 lm</div></div>	h(m)	E(lx)	D(m)	1	12442	0.27	2	3110	0.54	3	1382	0.81	4	778	1.07	5	498	1.34		
h(m)	E(lx)	D(m)																									
1	12442	0.27																									
2	3110	0.54																									
3	1382	0.81																									
4	778	1.07																									
5	498	1.34																									
3000	90	1730	1426	17.6	32°	03.8028	<div><div>Beam Angle: 28°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5799</td><td>0.49</td></tr><tr><td>2</td><td>1450</td><td>0.98</td></tr><tr><td>3</td><td>644</td><td>1.47</td></tr><tr><td>4</td><td>362</td><td>1.97</td></tr><tr><td>5</td><td>232</td><td>2.46</td></tr></tbody></table><div>Luminous flux luminaire 1399 lm</div></div>	h(m)	E(lx)	D(m)	1	5799	0.49	2	1450	0.98	3	644	1.47	4	362	1.97	5	232	2.46		
h(m)	E(lx)	D(m)																									
1	5799	0.49																									
2	1450	0.98																									
3	644	1.47																									
4	362	1.97																									
5	232	2.46																									
2700	90	1620	1242	17.6	32°	03.8026	<div><div>Beam Angle: 28°</div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>5145</td><td>0.49</td></tr><tr><td>2</td><td>1286</td><td>0.98</td></tr><tr><td>3</td><td>572</td><td>1.47</td></tr><tr><td>4</td><td>322</td><td>1.97</td></tr><tr><td>5</td><td>206</td><td>2.46</td></tr></tbody></table><div>Luminous flux luminaire 1242 lm</div></div>	h(m)	E(lx)	D(m)	1	5145	0.49	2	1286	0.98	3	572	1.47	4	322	1.97	5	206	2.46		
h(m)	E(lx)	D(m)																									
1	5145	0.49																									
2	1286	0.98																									
3	572	1.47																									
4	322	1.97																									
5	206	2.46																									

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Optional Accessories Anthony Spot

Honeycomb	Elliptical Lens	Flood Lens (28° Anthony Fixture + Flood Lens = 35°)
Part Number: 08.8419.14A	Part Number: 08.8418.68A	Part Number: 08.0050.00
		

The Tracking Magnet EVO Suspension Up&Down

High-tech LED lighting system for interior architecture

Multi Spot Mini How to Specify ex. 05.3550.14 / 05.3550.14.CB / 05.3550.14.DA / 05.3550.14.1V


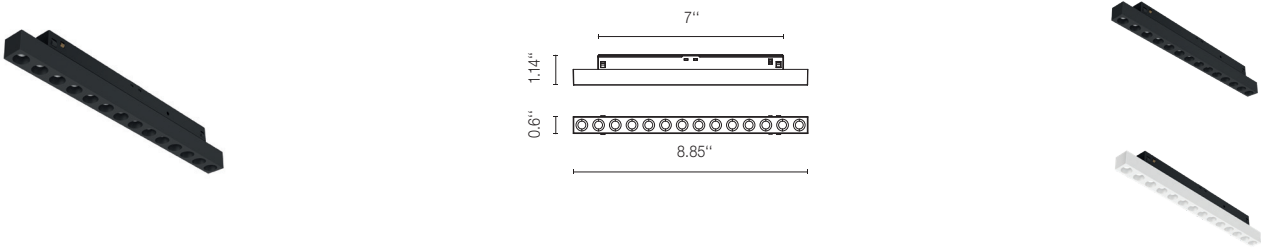



Table with 9 columns: CCT, CRI, Initial Lumens, Delivered Lumens, Watts, Beam Spread, Part Number, Finish, Dimming Protocol. It lists specifications for 2700K and 3000K color temperatures across different beam angles (15°, 20°, 32°) and finishes (White, Black).

Photometric


Spot 15°




Medium 20°




Flood 32°



3000 K



3000 K



3000 K

