


## The Tracking Magnet EVO Surface

High-tech LED lighting system for interior architecture

### Spot 150



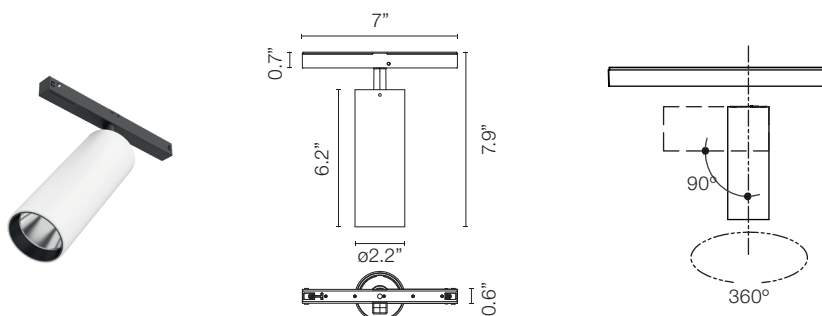




| CCT     | CRI  | Initial Lumens | Delivered Lumens | Watts | Beam Spread | Part Number | Finish   | Dimming Protocol  | Photometric   |      |         |         |        |        |        |        |        |        |       |       |      |
|---------|------|----------------|------------------|-------|-------------|-------------|--|---|---|------|---------|---------|--------|--------|--------|--------|--------|--------|-------|-------|------|
| 3000    | 90   | 2115           | 1872             | 22.5  | 16°         | 03.8073     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div> | Dimmable on Board   | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 17329</td><td>0.28</td></tr><tr><td>2 4332</td><td>0.56</td></tr><tr><td>3 1925</td><td>0.84</td></tr><tr><td>4 1083</td><td>1.12</td></tr><tr><td>5 693</td><td>1.40</td></tr></tbody></table>Luminous flux luminaire 1872 lm</div> | E(h) | D(m)    | 1 17329 | 0.28   | 2 4332 | 0.56   | 3 1925 | 0.84   | 4 1083 | 1.12  | 5 693 | 1.40 |
| E(h)    | D(m) |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 1 17329 | 0.28 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2 4332  | 0.56 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3 1925  | 0.84 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 4 1083  | 1.12 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 5 693   | 1.40 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2700    | 90   | 2000           | 1770             | 22.5  | 16°         | 03.8072     | 1V = 0-10V, 10% Dimming<br>DA = DALI, 10% Dimming  | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 16385</td><td>0.28</td></tr><tr><td>2 4096</td><td>0.56</td></tr><tr><td>3 1821</td><td>0.84</td></tr><tr><td>4 1024</td><td>1.12</td></tr><tr><td>5 655</td><td>1.40</td></tr></tbody></table>Luminous flux luminaire 1770 lm</div> | E(h)  | D(m) | 1 16385 | 0.28    | 2 4096 | 0.56   | 3 1821 | 0.84   | 4 1024 | 1.12   | 5 655 | 1.40  |      |
| E(h)    | D(m) |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 1 16385 | 0.28 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2 4096  | 0.56 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3 1821  | 0.84 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 4 1024  | 1.12 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 5 655   | 1.40 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3000    | 90   | 2115           | 1816             | 22.5  | 28°         | 03.8075     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div> | Dimmable on Board   | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 8395</td><td>0.50</td></tr><tr><td>2 2099</td><td>1.00</td></tr><tr><td>3 933</td><td>1.50</td></tr><tr><td>4 525</td><td>2.00</td></tr><tr><td>5 336</td><td>2.50</td></tr></tbody></table>Luminous flux luminaire 1816 lm</div>    | E(h) | D(m)    | 1 8395  | 0.50   | 2 2099 | 1.00   | 3 933  | 1.50   | 4 525  | 2.00  | 5 336 | 2.50 |
| E(h)    | D(m) |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 1 8395  | 0.50 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2 2099  | 1.00 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3 933   | 1.50 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 4 525   | 2.00 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 5 336   | 2.50 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2700    | 90   | 2000           | 1717             | 22.5  | 28°         | 03.8074     | A1V = 0-10V, 10% Dimming<br>ADA = DALI, 10% Dimming  | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 7938</td><td>0.50</td></tr><tr><td>2 1984</td><td>1.00</td></tr><tr><td>3 882</td><td>1.50</td></tr><tr><td>4 496</td><td>2.00</td></tr><tr><td>5 318</td><td>2.50</td></tr></tbody></table>Luminous flux luminaire 1717 lm</div>    | E(h)  | D(m) | 1 7938  | 0.50    | 2 1984 | 1.00   | 3 882  | 1.50   | 4 496  | 2.00   | 5 318 | 2.50  |      |
| E(h)    | D(m) |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 1 7938  | 0.50 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2 1984  | 1.00 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3 882   | 1.50 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 4 496   | 2.00 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 5 318   | 2.50 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3000    | 90   | 2115           | 1838             | 22.5  | 40°         | 03.8077     | <div><div></div> 40 = White</div> <div><div></div> 14 = Black</div> <div><div></div> 05 = Chrome</div> | Dimmable on Board   | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 4656</td><td>0.73</td></tr><tr><td>2 1164</td><td>1.46</td></tr><tr><td>3 517</td><td>2.18</td></tr><tr><td>4 291</td><td>2.91</td></tr><tr><td>5 186</td><td>3.64</td></tr></tbody></table>Luminous flux luminaire 1838 lm</div>    | E(h) | D(m)    | 1 4656  | 0.73   | 2 1164 | 1.46   | 3 517  | 2.18   | 4 291  | 2.91  | 5 186 | 3.64 |
| E(h)    | D(m) |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 1 4656  | 0.73 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2 1164  | 1.46 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3 517   | 2.18 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 4 291   | 2.91 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 5 186   | 3.64 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2700    | 90   | 2000           | 1738             | 22.5  | 40°         | 03.8076     | 1V = 0-10V, 10% Dimming<br>DA = DALI, 10% Dimming  | <div><table><thead><tr><th>E(h)</th><th>D(m)</th></tr></thead><tbody><tr><td>1 4402</td><td>0.73</td></tr><tr><td>2 1101</td><td>1.46</td></tr><tr><td>3 489</td><td>2.18</td></tr><tr><td>4 275</td><td>2.91</td></tr><tr><td>5 176</td><td>3.64</td></tr></tbody></table>Luminous flux luminaire 1738 lm</div>    | E(h)  | D(m) | 1 4402  | 0.73    | 2 1101 | 1.46   | 3 489  | 2.18   | 4 275  | 2.91   | 5 176 | 3.64  |      |
| E(h)    | D(m) |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 1 4402  | 0.73 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 2 1101  | 1.46 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 3 489   | 2.18 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 4 275   | 2.91 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |
| 5 176   | 3.64 |                |                  |       |             |             |  |   |   |      |         |         |        |        |        |        |        |        |       |       |      |

## The Tracking Magnet EVO Surface

High-tech LED lighting system for interior architecture

### Optional Accessories Spot 150

|   |   |   |
|---|---|---|
| <b>Cross Baffle</b><br><br><hr/> Part Number:<br><br><b>08.8429.00</b><br><br> | <b>Elliptical Lens</b><br><br><hr/> Part Number:<br><br><b>08.8431.00</b><br><br>        | <b>Flood Lens</b><br><br><hr/> Part Number:<br><br><b>08.8432.00</b><br><br> |
| <b>Honeycomb</b><br><br><hr/> Part Number:<br><br><b>08.8428.00</b><br><br>  | <b>Snoot shielding cone</b><br><br><hr/> Part Number:<br><br><b>08.0526.00</b><br><br> |   |