



EasyKap 30 Adjustable Non-IC

Non-IC Ceiling Recessed Trim Downlight

Description

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

Lamp

Lamps Type	Power LED
Wattage	2.5W
Output Nominal	222 lm / 229 lm
Color Temperature	2700K / 3000K
Color rendering	CRI 90


Optical

Beam Angle	19°/ 26°/ 35°/52°
Lighting Type	Direct
Light Distribution	Symmetric


Physical

Material	Aluminum
Aiming	17° Adjustable
Weight	0.18 Lbs
Ingress Protection Rating	IP54
Finishes	Painted lacquer

☐ B1 White ☒ 74 Black ☐ GL Matt Gold

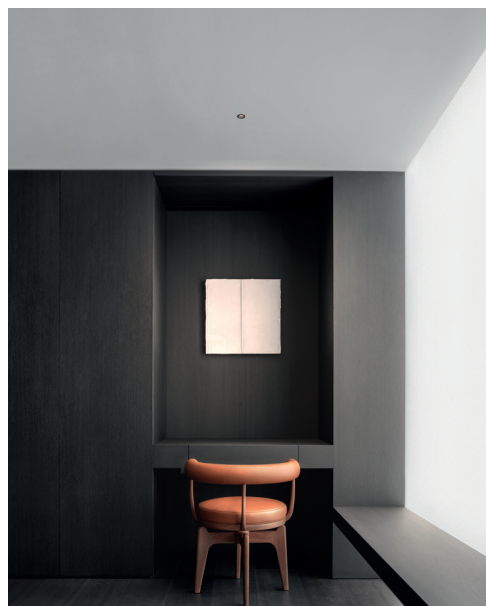

Dimensions



Certifications



Class 2


Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

Installation type	Ceiling Recessed
Environment	Indoor dry location

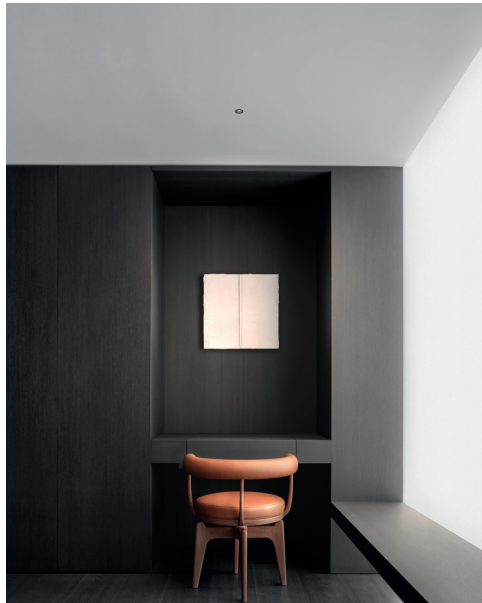

EasyKap 30 Adjustable Non-IC

Non-IC Ceiling Recessed Trim Downlight

Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1 linear, DALI, and ELV Phase Cut
Driver	Remote
Current	800mA / 850mA (see power supply options)

Performance

Maximum delivered output	up to 218 lm
Efficacy	up to 87 lm/W



Notes

Integral LED. COB is not field replaceable.


NON-IC rated luminaire.

Location: Indoor dry locations only.

Dimensions

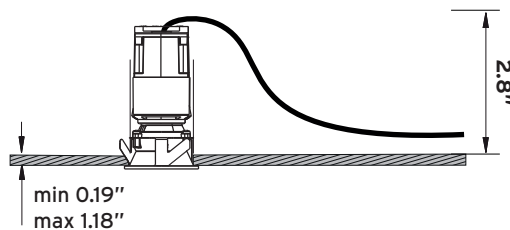

h = 2.8" min.



Certifications



Class 2

Photometrics

For current IES files please visit architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS, USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

EasyKap 30 Adjustable Non-IC

Non-IC Ceiling Recessed Trim Downlightt

How to specify

Set of 1 Spot




How to Specify ex. 05.7610.B1A9S

Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
05.7615	3000	90	229	2.5W	19°	B1 = White 74 = Black GL = Gold	B9S
05.7610	2700	90	222				
05.7616	3000	90	229		26°		
05.7611	2700	90	222				
05.7617	3000	90	229		35°		
05.7612	2700	90	222				
05.7618	3000	90	229		52°		
05.7613	2700	90	222				


Photometries

White B1
Optic Spot




@3000

Optic Medium




@3000

Optic Flood




@3000


Optic Wide Flood




@3000




@2700



@2700



@2700



@2700

EasyKap 30 Adjustable Non-IC

Non-IC Ceiling Recessed Trim Downlight


How to specify

Set of 4 Spot

Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
05.7635	3000	90	229	2.5W	19°	☐ B1 = White ☒ 74 = Black ☐ GL = Gold	B9S
05.7630	2700	90	222				
05.7636	3000	90	229		26°		
05.7631	2700	90	222				
05.7637	3000	90	229		35°		
05.7632	2700	90	222				
05.7638	3000	90	229		52°		
05.7633	2700	90	222				


Photometries

White B1
Optic Spot




@3000

Optic Medium




@3000

Optic Flood




@3000


Optic Wide Flood




@3000




@2700



@2700



@2700



@2700

EasyKap 30 Adjustable Non-IC


Non-IC Ceiling Recessed Trim Downlight

Driver

Splice Box UL 7"x3-5/8"x1-1/4", UL. With Eldoled Eco Drive 12W/s series Driver Programmed to 850MA, 12W, DALI Dimmable, 120-277V

SP12W850MA-DAL-T01


Minimum: 1
Maximum: 4 (Maximum driver efficiency achieved with 4 light load)



LED DVR 40W 800mA , Variable Dim Triac, ELV, 120/277V input, Dip Switch settable, Dry location enclosure.

LEDSB40W800MA-V-Y1

Minimum: 1
Maximum: 4



Splice Box UL 7"x3-5/8"x1-1/4", UL. With Eldoled Eco Drive 12W/s series Driver Programmed to 850MA, 12W, 0-10V Dimmable, 120-277V.

SP12W850MA-10V-T01

Minimum: 1
Maximum: 4 (Maximum driver efficiency achieved with 4 light load)

