




Dimensions



Certifications

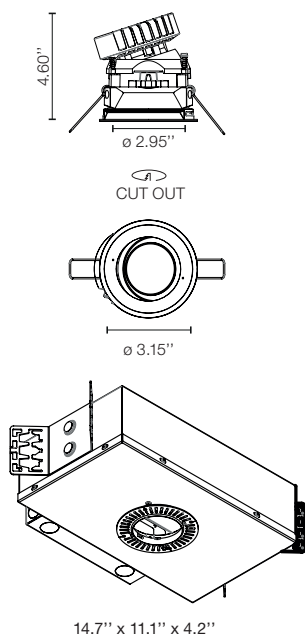

JAB-2019 CA
TITLE 24
LISTED



Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty

2 years from date of sale.

FLOS. USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

EasyKap 80 Round Adjustable Airtight - IC Rated

Ceiling Recessed Trim Downlight

Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JAB-2019 CA Title 24 listed and CCEA Chicago Plenum.

Lamp

Lamps Type	LED ARRAY
Wattage	9.2W
Output Nominal	935 lm / 974 lm
Color Temperature	2700K - 3000K
Color rendering	CRI 90

Optical

Beam Angle	18° / 27° / 51° (white finish)
Lighting Type	Direct
Light Distribution	Symmetric

Physical

Material	Aluminum
Aiming	Adjustable to 20°
Weight	0.53 Lbs
Ingress Protection Rating	IP54
Finishes	Painted lacquer

☐ B1 White

☒ 74 Black


☐ GL Matt Gold





Installation type	Ceiling Recessed
Environment	Indoor dry location



Dimensions



CUT OUT



14.7" x 11.1" x 4.2"

EasyKap 80 Round Adjustable Airtight - IC Rated

Ceiling Recessed Trim Downlight

Electrical & Control

Input Voltage	120-277V
Control	Standard 0-10V dimming 1% linear
Driver	Integral on housing
Current	500mA

Performance

Maximum delivered output	704 lm
Efficacy	76 lm/W

Notes

Integral LED. COB is not field replaceable.

Softening diffuser accessory provided.

IP54 – Suitable for Damp locations.

Airtight Listed housing for new construction only.

JAB-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

Certifications



JAB-2019 CA
TITLE 24
LISTED



Photometrics

For current IES files please visit
architectural.flosusa.com

Warranty


2 years from date of sale.

FLOS, USA
36 East 31st Street
Suite 402
New York N.Y. 10016
(800) 841.4011

EasyKap 80 Round Adjustable Airtight - IC Rated

Ceiling Recessed Trim Downlight

How to specify

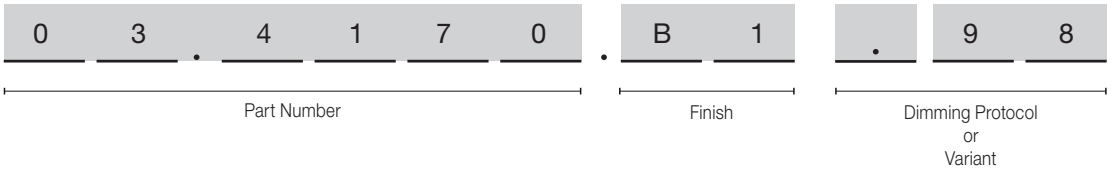

How to Specify ex. 03.4170.B1.98


Part Number	CCT	CRI	Initial Lumens	Watts	Beam Angle	Finish	Variant
03.4170	3000	90	974	9,2W	18°	B1 = White 74 = Black GL = Gold	.98 : CCEA, JA8-2019 CA Title 24 listed downlight, Housing is required.
03.4153	2700		935				
03.4171	3000		974		27°		
03.4155	2700		935				
03.4172	3000		974		51°		
03.4157	2700		935				

EasyKap 80 Round Adjustable Airtight - IC Rated

Ceiling Recessed Trim Downlight


Photometries Optic Spot

☐ B1 White




@3000K

☒ 74 Black



@3000K


☒ GL Matt Gold



@3000K


Photometries Optic Medium

☐ B1 White




@3000K

☒ 74 Black



@3000K


☒ GL Matt Gold



@3000K


Photometries Optic Flood

☐ B1 White




@3000K

☒ 74 Black



@3000K

☒ GL Matt Gold



@3000K

EasyKap 80 Round Adjustable Airtight - IC Rated

Ceiling Recessed Trim Downlight

Required Housing and Hanger Bar

Kap 80 Airtight Housing for New construction, Integral 0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum	1 male, 1 female hanger bar Extendable from 14" to 24" centers. Qty required 2
08.7060.00.90	08.1201.00.UL

