


### Dimensions



### Certifications

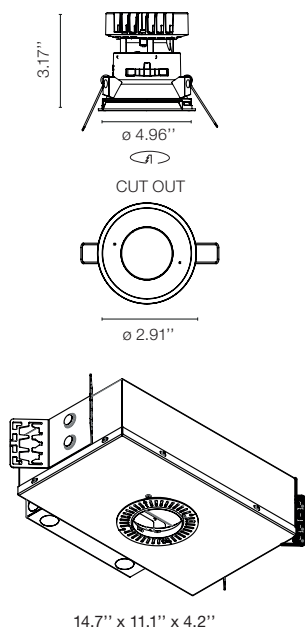

JAB-2019 CA  
TITLE 24  
LISTED



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.

FLOS. USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011

## EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trim Downlight

### Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JAB-2019 CA Title 24 listed and CCEA Chicago Plenum.

### Lamp

|                   |                 |
|-------------------|-----------------|
| Lamps Type        | LED ARRAY       |
| Wattage           | 9.2W            |
| Output Nominal    | 935 lm / 974 lm |
| Color Temperature | 2700K - 3000K   |
| Color rendering   | CRI 90          |

### Optical

|                    |                                |
|--------------------|--------------------------------|
| Beam Angle         | 19° / 26° / 50° (white finish) |
| Lighting Type      | Direct                         |
| Light Distribution | Symmetric                      |

### Physical

|                           |                   |
|---------------------------|-------------------|
| Material                  | Aluminum          |
| Aiming                    | Adjustable to 20° |
| Weight                    | 0.53 Lbs          |
| Ingress Protection Rating | IP54              |
| Finishes                  | Painted lacquer   |

☐ B1 White

☒ 74 Black

☐ GL Matt Gold



### Installation type


Ceiling Recessed

### Environment

Indoor dry location



## Dimensions

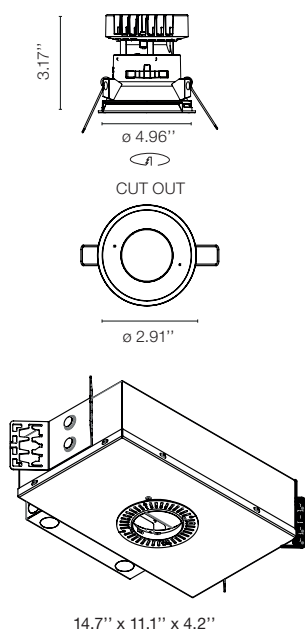

## Certifications



JAB-2019 CA  
TITLE 24  
LISTED



## Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

## Warranty

2 years from date of sale.

## EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trim Downlight

### Electrical & Control

|               |                                  |
|---------------|----------------------------------|
| Input Voltage | 120-277V                         |
| Control       | Standard 0-10V dimming 1% linear |
| Driver        | Integral on housing              |
| Current       | 500mA                            |

### Performance

|                          |         |
|--------------------------|---------|
| Maximum delivered output | 704 lm  |
| Efficacy                 | 71 lm/W |

## Notes

Integral LED. COB is not field replaceable.

Softening diffuser accessory provided.

IP54 – Suitable for Damp locations.

Airtight Listed housing for new construction only.

JA8-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.


CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trim Downlight

How to specify

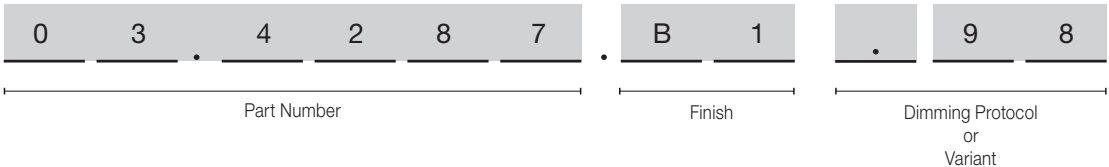


How to Specify      ex. 03.4287.B1.98

| Part Number | CCT  | CRI | Initial Lumens | Watts | Beam Angle | Finish                                                                                                                                      | Variant                                                                 |
|-------------|------|-----|----------------|-------|------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| 03.4287     | 3000 | 90  | 974            | 9,2W  | 19°        | <div><input type="checkbox"/> B1 = White</div> <div><input type="checkbox"/> 74 = Black</div> <div><input type="checkbox"/> GL = Gold</div> | .98 : CCEA, JA8-2019 CA Title 24 listed downlight, Housing is required. |
| 03.4288     | 2700 |     | 935            |       |            |                                                                                                                                             |                                                                         |
| 03.4192     | 3000 |     | 974            |       | 26°        |                                                                                                                                             |                                                                         |
| 03.4193     | 2700 |     | 935            |       |            |                                                                                                                                             |                                                                         |
| 03.4297     | 3000 |     | 974            |       | 50°        |                                                                                                                                             |                                                                         |
| 03.4298     | 2700 |     | 935            |       |            |                                                                                                                                             |                                                                         |

EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trim Downlight

Photometries Optic Spot

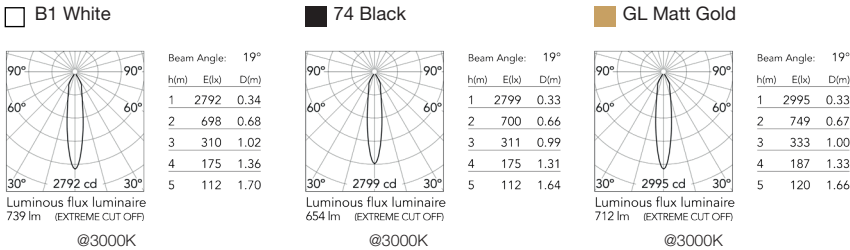

EasyKap 80 Round Fixed Airtight - IC Rated

Ceiling Recessed Trim Downlight

Required Housing and Hanger Bar

|                                                                                                                   |                                                                                      |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Kap 80 Airtight Housing for New construction, Integral 0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum | 1 male, 1 female hanger bar<br>Extendable from 14" to 24"<br>centers. Qty required 2 |
| 08.7060.00.90                                                                                                     | 08.1201.00.UL                                                                        |

