




## EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight



### Dimensions



### Description

LED Downlight with minimal trim for recessed mounting into drywall or plasterboard ceilings. The Easy Kap has a die-cast aluminum body with a painted lacquer finish. This LED downlight uses cutting edge technology which creates a higher-powered downlight due to cooler operating electronics yielding 20% higher luminous flux than earlier models. Product is JA8-2019 CA Title 24 listed and CCEA Chicago Plenum.

### Lamp

|                   |              |
|-------------------|--------------|
| Lamps Type        | LED ARRAY    |
| Wattage           | 9.2W         |
| Output Nominal    | 935lm, 974lm |
| Color Temperature | 2700K, 3000K |
| Color rendering   | CRI 90       |

### Optical

|                    |           |
|--------------------|-----------|
| Beam Angle         | 28°       |
| Lighting Type      | Direct    |
| Light Distribution | Symmetric |

### Physical

|                           |                 |
|---------------------------|-----------------|
| Material                  | Aluminum        |
| Aiming                    | Wall Washer     |
| Weight                    | 0.6 Lbs         |
| Ingress Protection Rating | IP54            |
| Finishes                  | Painted lacquer |

☐ B1 White

☐ 74 Black

☐ GL Matt Gold



### Certifications



### Photometrics

For current IES files please visit [architectural.flosusa.com](http://architectural.flosusa.com)


### Warranty

2 years from date of sale.


FLOS, USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011

## EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight

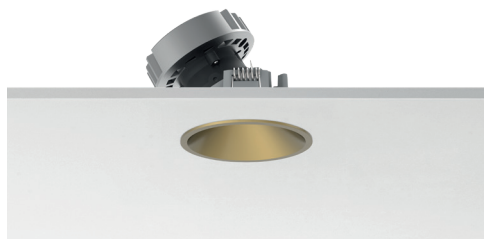


### Dimensions




ø 2.95"

CUT OUT



ø 3.14"



14.7" x 11.1" x 4.2"

### Electrical & Control

|               |                                  |
|---------------|----------------------------------|
| Input Voltage | 120-277V                         |
| Control       | Standard 0-10V dimming 1% linear |
| Driver        | Integral on housing              |
| Current       | 500mA                            |

### Performance

|                          |           |
|--------------------------|-----------|
| Maximum delivered output | 622lm     |
| Efficacy                 | 67.61lm/W |

### Notes

Integral LED. COB is not field replaceable by the final user.

Softening diffuser accessory provided.

IP54 – Suitable for Damp locations.

Airtight Listed housing for new construction only.

JA8-2019 CA Title 24 listed downlight, 0-10V dimmable. Not available with ELV dimming.

CCEA, Chicago Plenum standard 0-10V dimmable. Consult with factory for ELV option.

IC-rated downlight for direct insulation contact.

### Certifications



JA8-2019 CA  
TITLE 24  
LISTED



### Photometrics

For current IES files please visit  
[architectural.flosusa.com](http://architectural.flosusa.com)

### Warranty

2 years from date of sale.

FLOS, USA  
36 East 31st Street  
Suite 402  
New York N.Y. 10016  
(800) 841.4011


For more information contact your representative or go to [professional.flos.com/en-US/us/](http://professional.flos.com/en-US/us/)  
©2026 Specifications and dimensions subject to change without notice. Issued 01.30.2026



EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight

How to specify

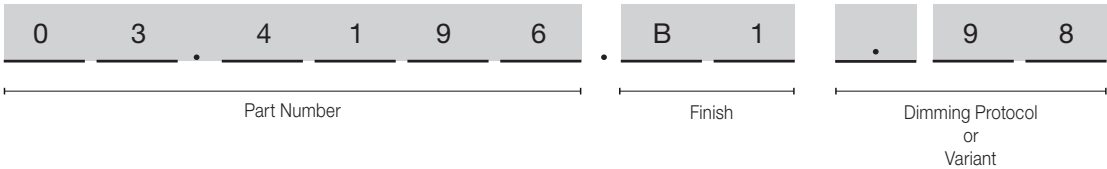


How to Specify ex. 03.4188.B1.98

| Part Number | CCT  | CRI | Initial Lumens | Watts | Beam Angle | Finish                                                                                               | Variant                                                                    |
|-------------|------|-----|----------------|-------|------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 03.4196     | 3000 | 90  | 974            | 9,2W  | 28°        | <div><div></div> B1 = White</div> <div><div></div> 74 = Black</div> <div><div></div> GL = Gold</div> | .98 : CCEA, JA8-2019 CA Title 24 listed downlight.<br>Housing is required. |
| 03.4197     | 2700 | 90  | 935            |       |            |                                                                                                      |                                                                            |

Photometries

B1 White



EasyKap 80 Round Wall-Washer Airtight - IC Rated

Ceiling Recessed Trim Downlight

Required Housing and Hanger Bar

|                                                                                                                   |                                                                                      |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Kap 80 Airtight Housing for New construction, Integral 0-10V dimmable driver. Title 24 - JA8, CCEA Chicago Plenum | 1 male, 1 female hanger bar<br>Extendable from 14" to 24"<br>centers. Qty required 2 |
| 08.7060.00.90                                                                                                     | 08.1201.00.UL                                                                        |

